

Mechanics of Materials



دانشگاه کردستان
University of Kurdistan
زانکۆی کوردستان

Ferdinand P.Beer, E.Russel Johnston, Jr., John T.Dewolf

Other Reference:

J.Wat Oler “Lectures notes on Mechanics od Materials”

Ibrahim A.Assakkaf “Lectures notes on Mechanics od Materials”

Introduction to Plasticity

By: Kaveh Karami


Associate Prof. of Structural Engineering

<https://prof.uok.ac.ir/Ka.Karami>

Introduction to Plasticity


□ Inelastic (Plastic) Axial Deformation and Residual Stress

- Previous analyses based on assumption of linear stress-strain relationship, i.e., stresses below the yield stress
- Assumption is good for brittle material which rupture without yielding
- If the yield stress of ductile materials is exceeded, then plastic deformations occur

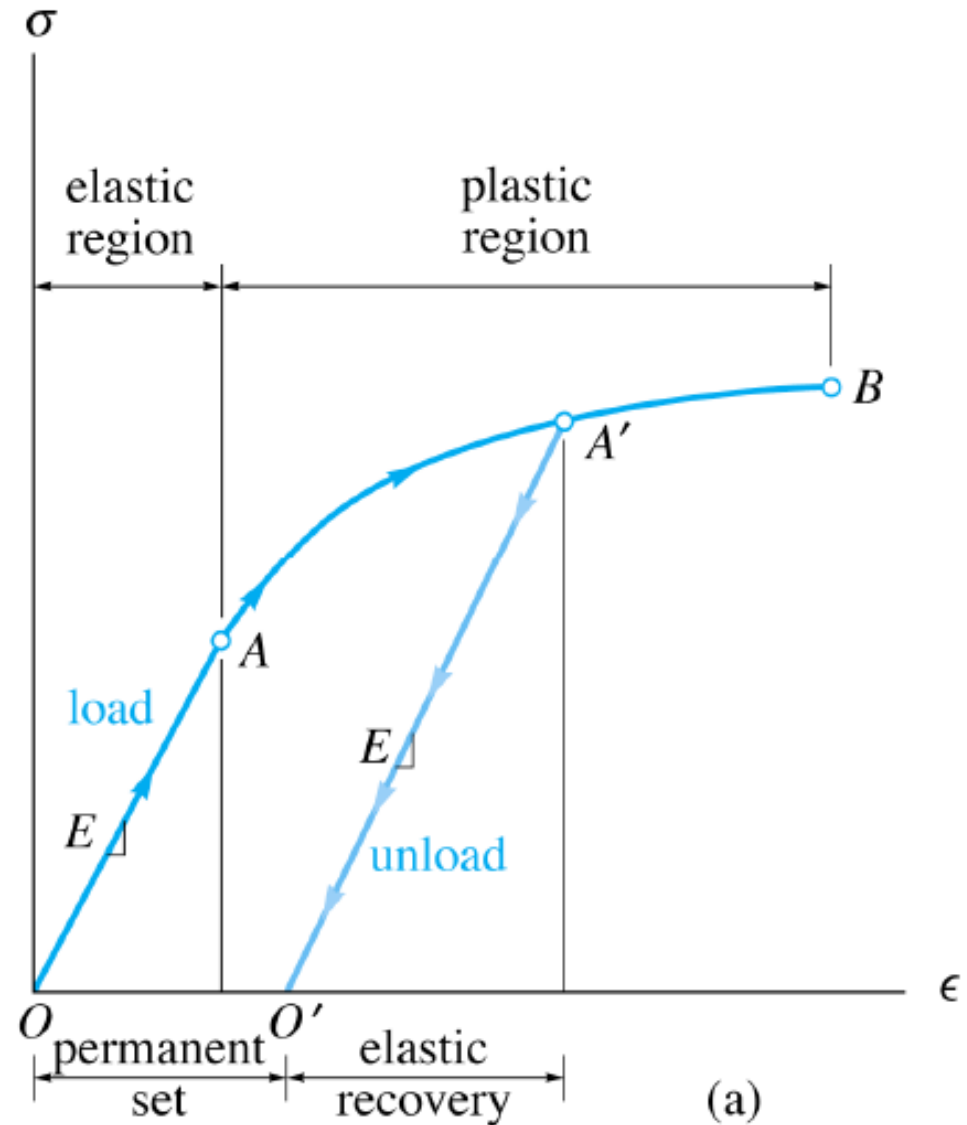

Introduction to Plasticity

□ Inelastic (Plastic) Axial Deformation and Residual Stress


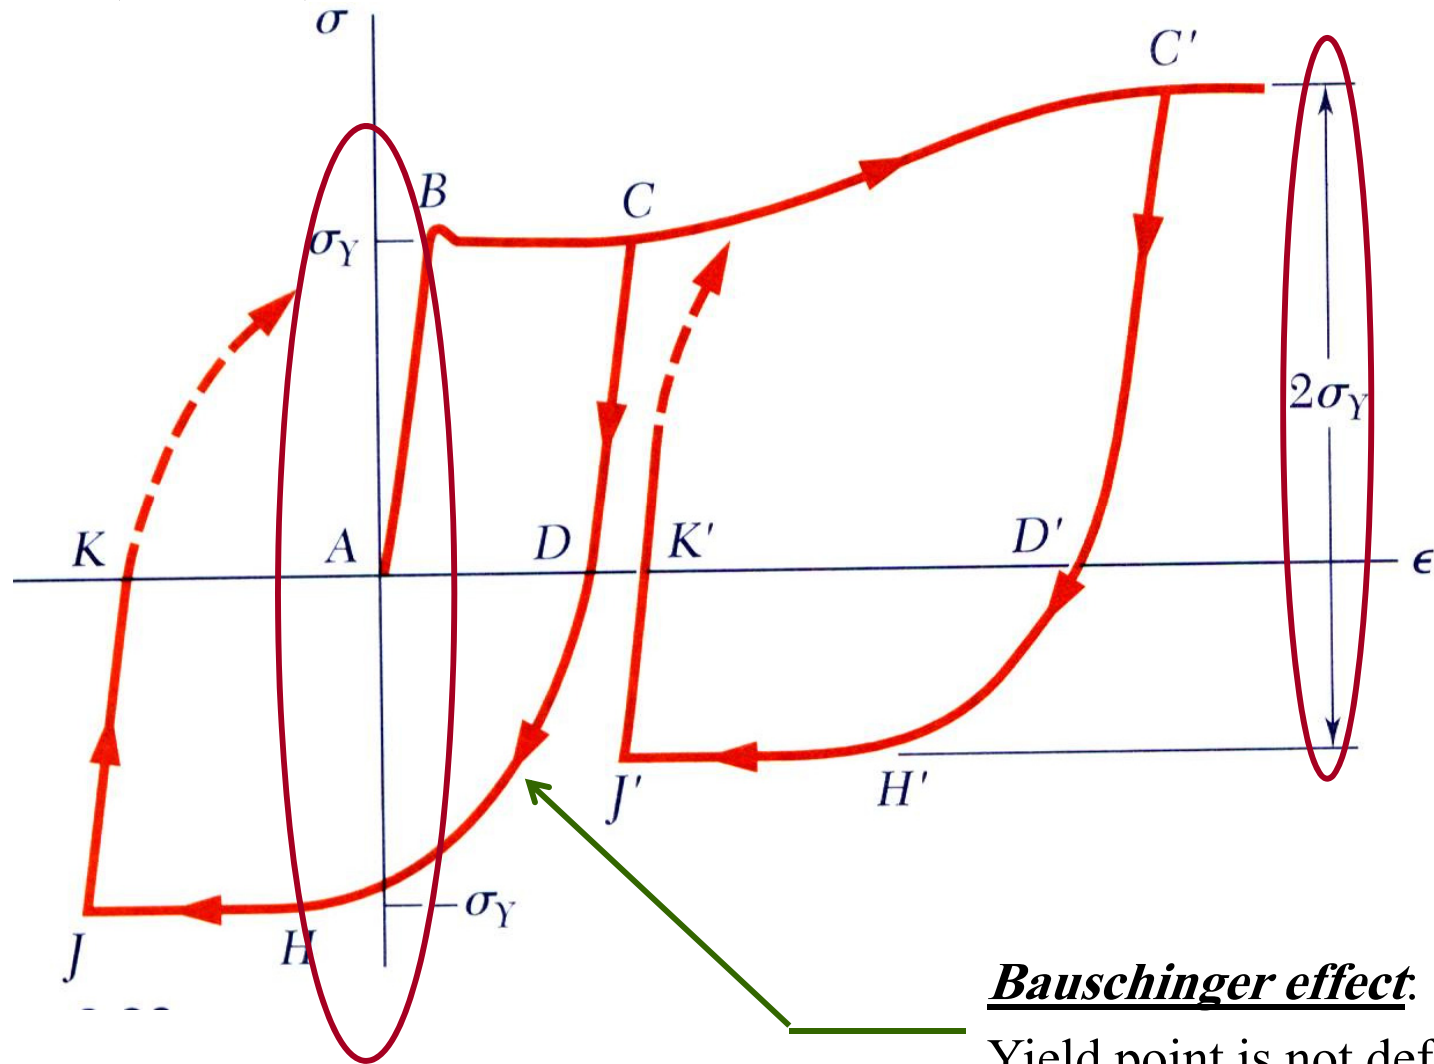


Bauschinger effect.
Yield point is not defined clearly

Introduction to Plasticity

□ Inelastic (Plastic) Axial Deformation and Residual Stress


- Analysis of plastic deformations is simplified by assuming an idealized Elastoplastic material
- Deformations of an Elastoplastic material are divided into elastic and plastic ranges
- Permanent deformations result from loading beyond the yield stress

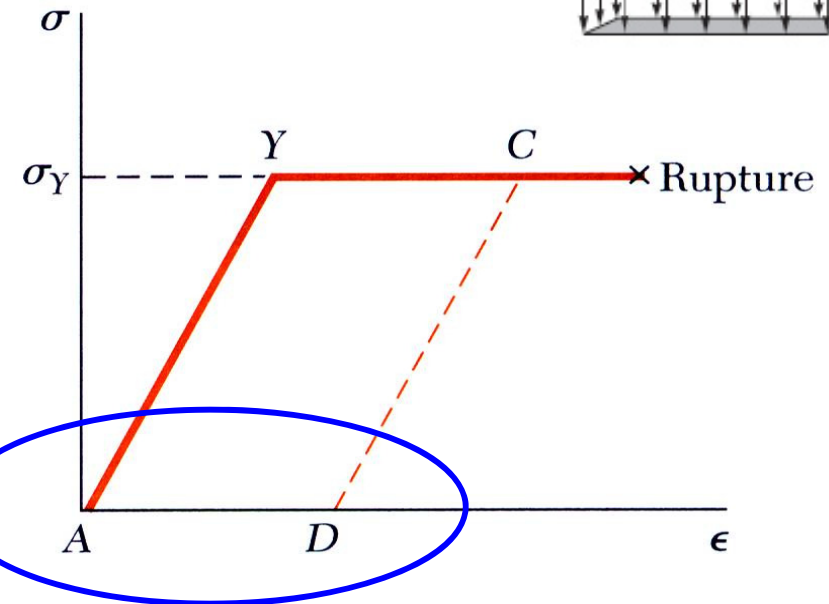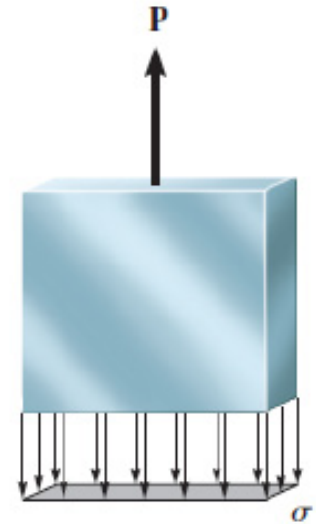

Introduction to Plasticity

□ Stress Concentration

Consider now the case of a bar with a hole through it (a stress concentration). The stress distribution across section a-a is not uniform due to the stress concentration. The material closest to the hole reaches the yield stress first. Once the entire section reaches the yield stress the section can sustain no greater load.

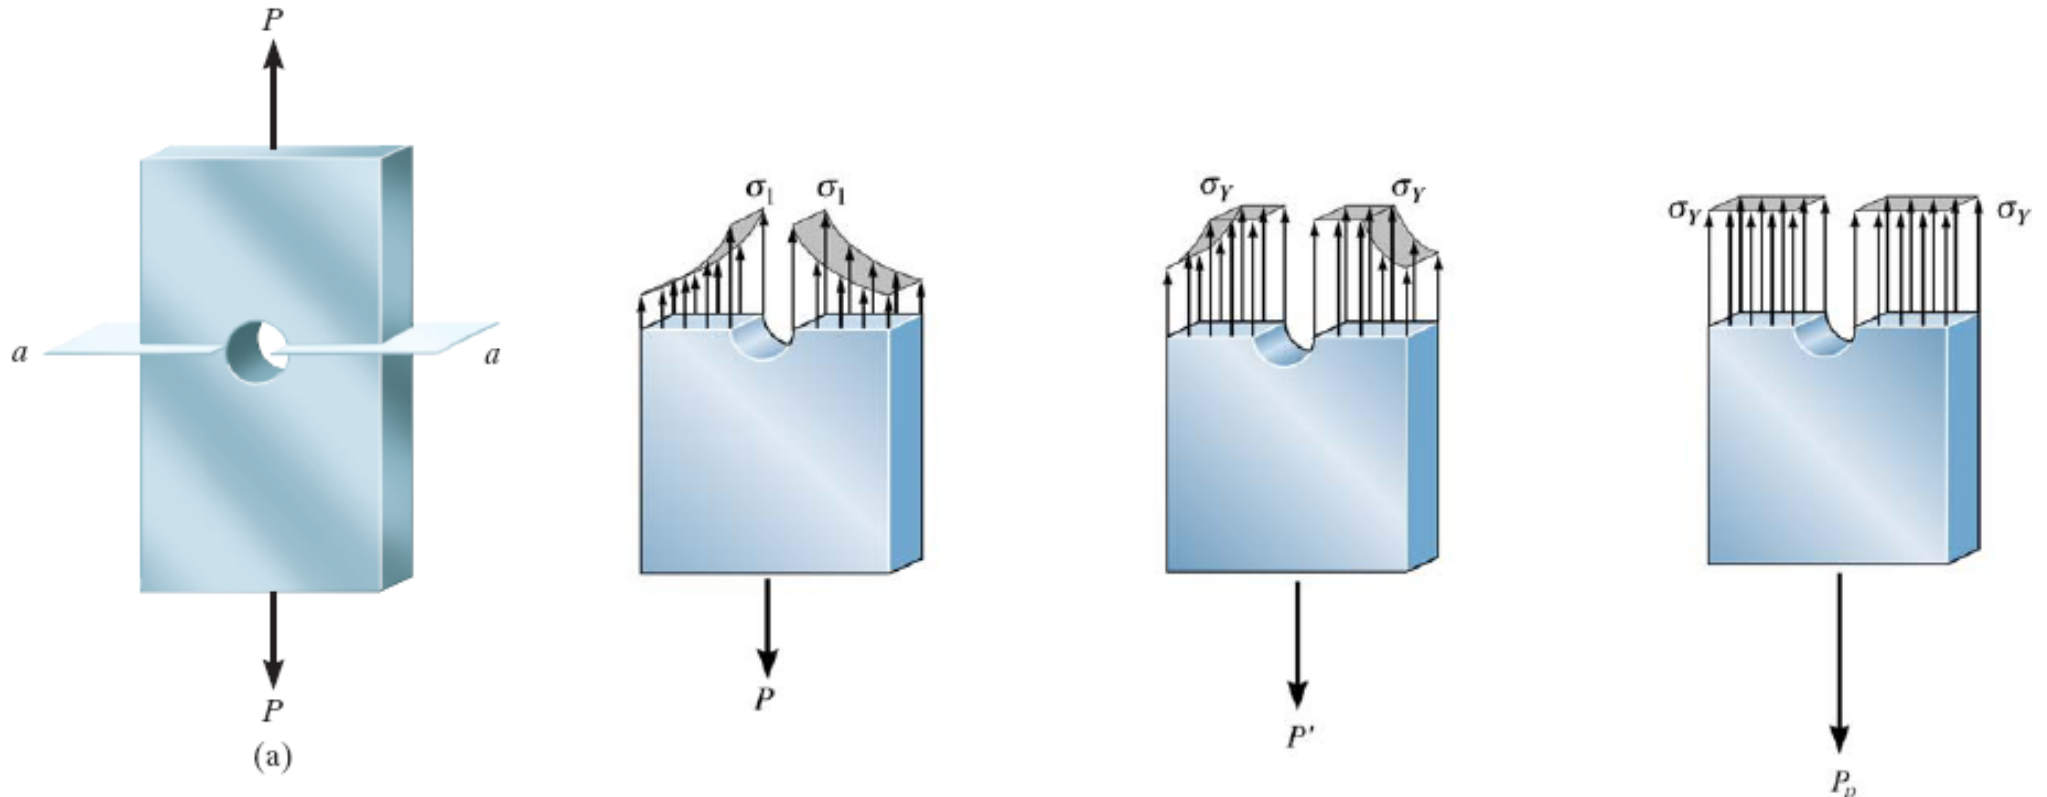

Introduction to Plasticity

□ Stress Concentration

- Elastic deformation while maximum stress is less than yield stress

$$P = \sigma_{ave} A = \frac{\sigma_{max} A}{K}$$


- Maximum stress is equal to the yield stress at the maximum elastic loading

$$P_Y = \frac{\sigma_Y A}{K}$$

- At loadings above the maximum elastic load, a region of plastic deformations develop near the hole

- As the loading increases, the plastic region expands until the section is at a uniform stress equal to the yield stress

$$P_U = \sigma_Y A = K P_Y$$

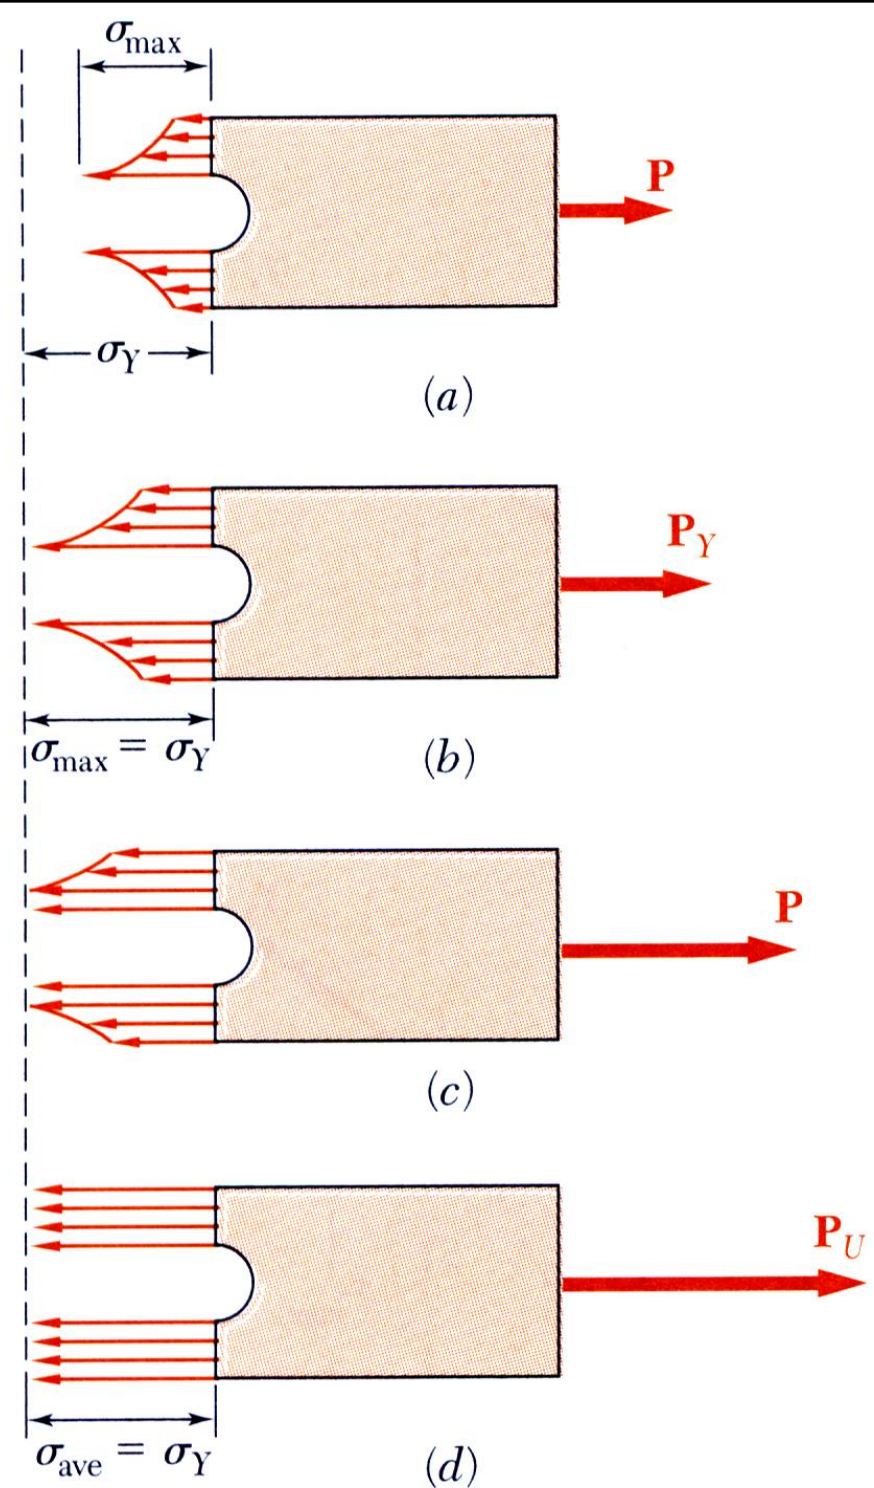


Introduction to Plasticity

□ Plastic Deformations due to axial force

Example 01



The bar is made of steel that is assumed to be elastic perfectly plastic, with $\sigma_Y = 250$ MPa. Determine (a) the maximum value of the applied load P that can be applied without causing the steel to yield and (b) the maximum value of P that the bar can support. Sketch the stress distribution at the critical section for each case.

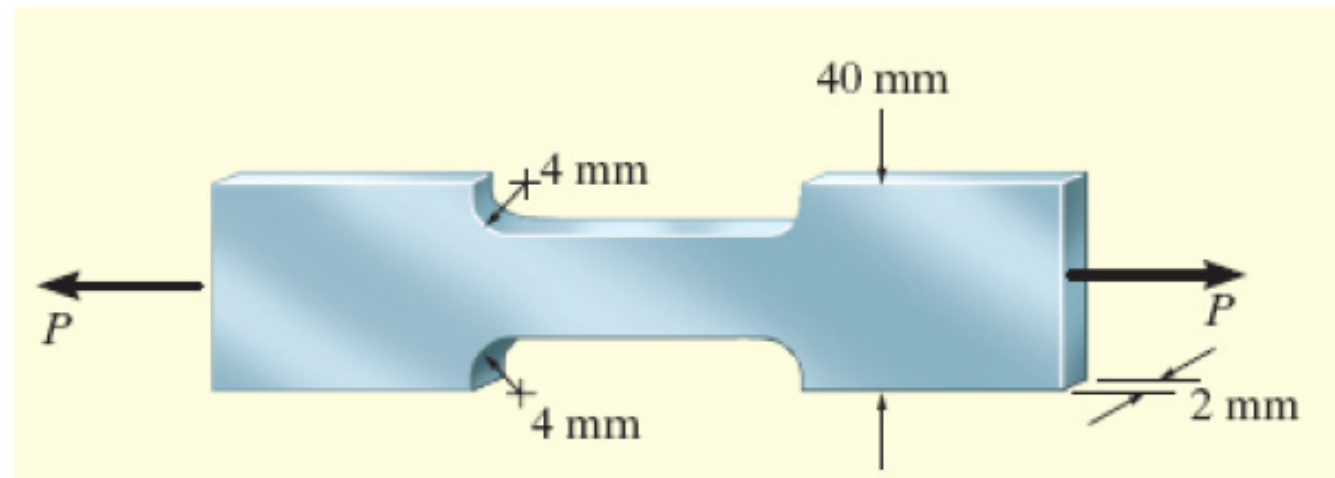

Introduction to Plasticity

❑ Plastic Deformations due to axial force

Example 01

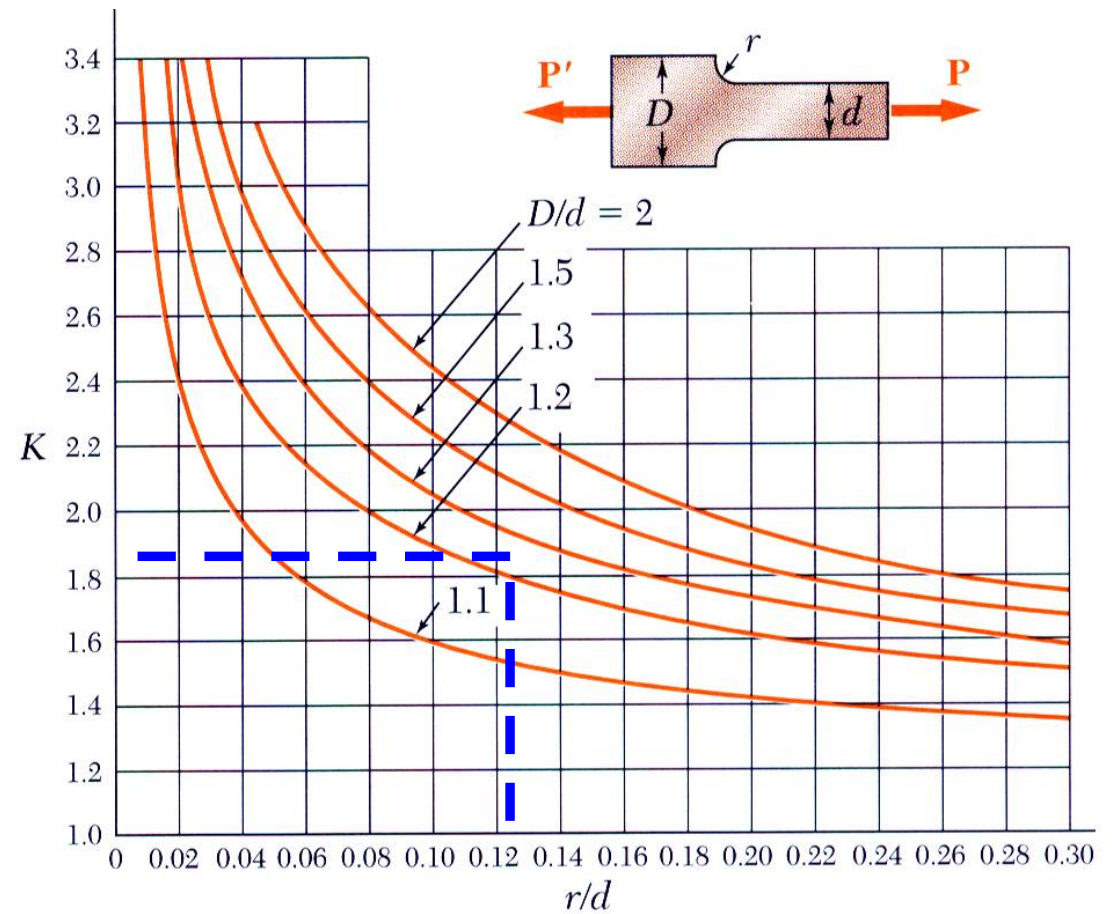
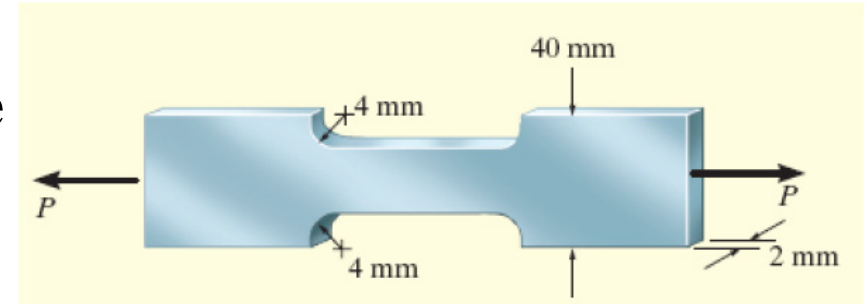


(b) Flat bars with fillets

Introduction to Plasticity

□ Plastic Deformations due to axial force



Example 01

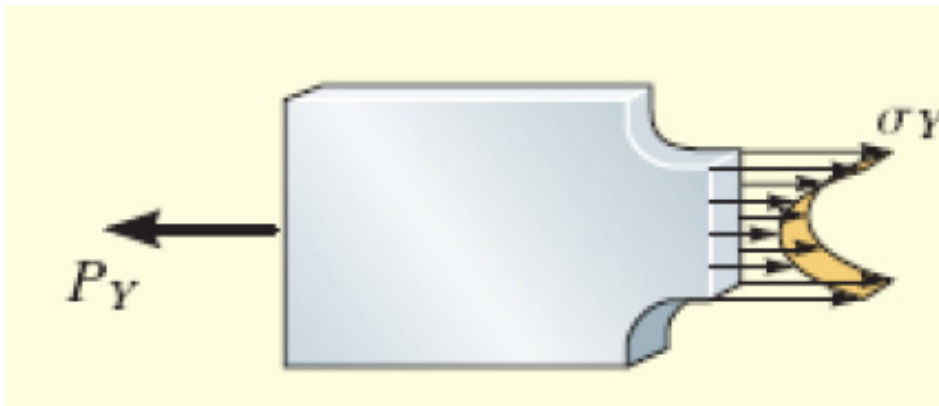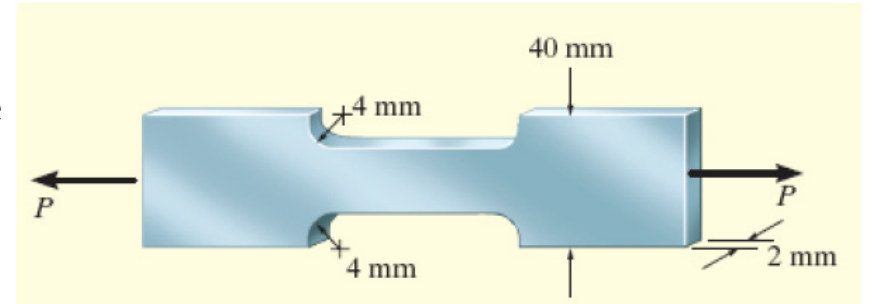

Introduction to Plasticity

□ Plastic Deformations due to axial force

Example 01

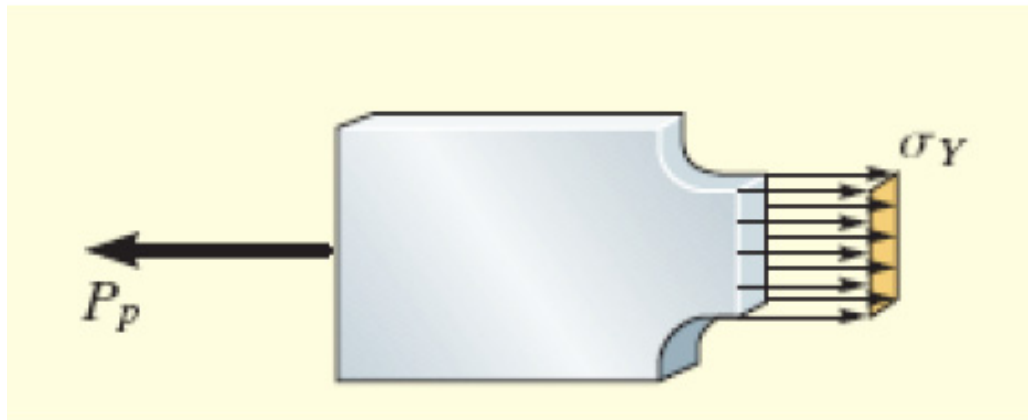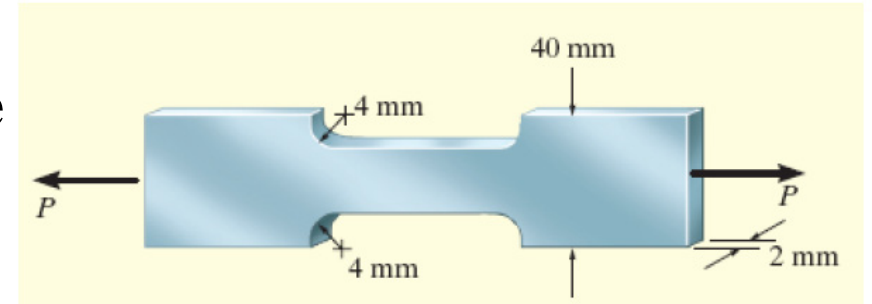

Introduction to Plasticity


□ Inelastic (Plastic) Axial Deformation and Residual Stress

- When a single structural element is loaded uniformly beyond its yield stress and then unloaded, it is permanently deformed but all stresses disappear. This is not the general result.
- ***Residual stresses*** will remain in a structure after loading and unloading if
 - only part of the structure undergoes plastic deformation
 - different parts of the structure undergo different plastic deformations
- Residual stresses also result from the ***uneven heating or cooling*** of structures or structural elements

Introduction to Plasticity



Example 02

The rod shown below has a radius of 5 mm and is made of an elastic perfectly plastic material for which $\sigma_Y = 420 \text{ Mpa}$ and $E = 70 \text{ GPa}$. If a force of $P = 60 \text{ kN}$ is applied to the rod and then removed, determine the residual stress in the rod.

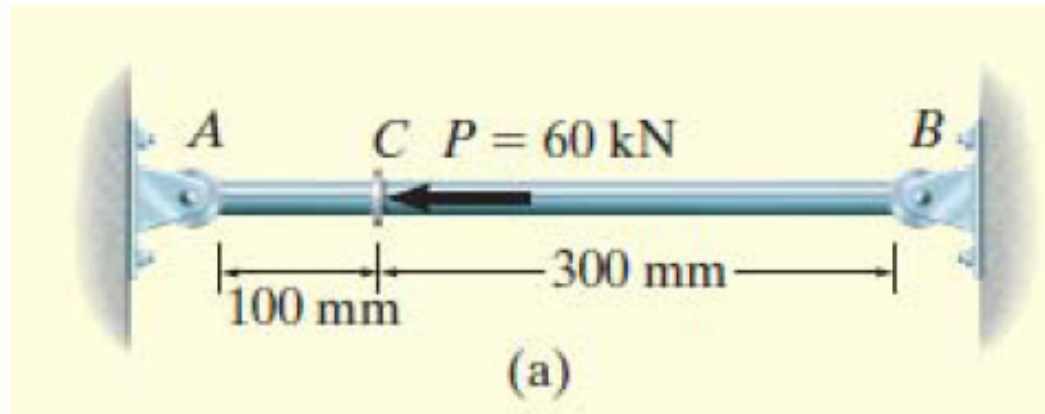



Introduction to Plasticity

Example 02

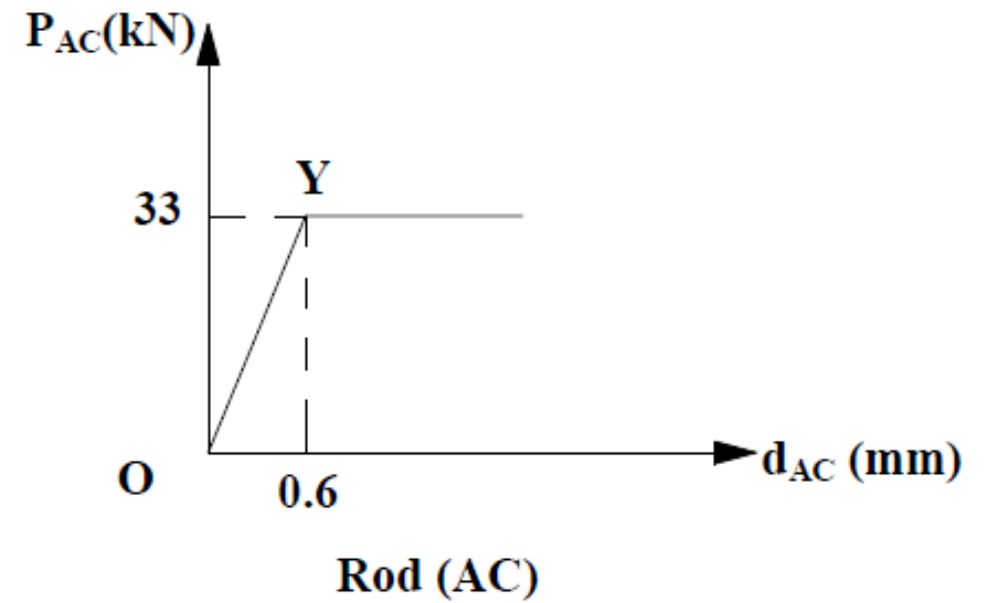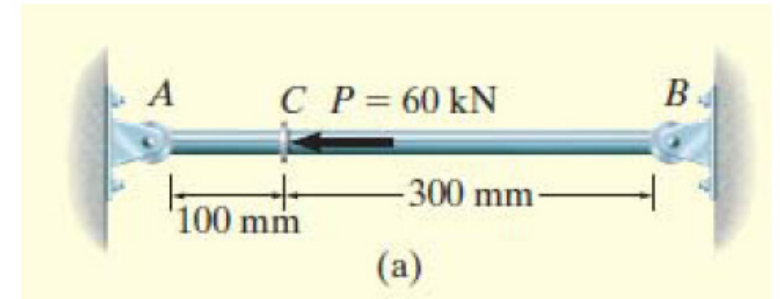

Introduction to Plasticity

Example 02



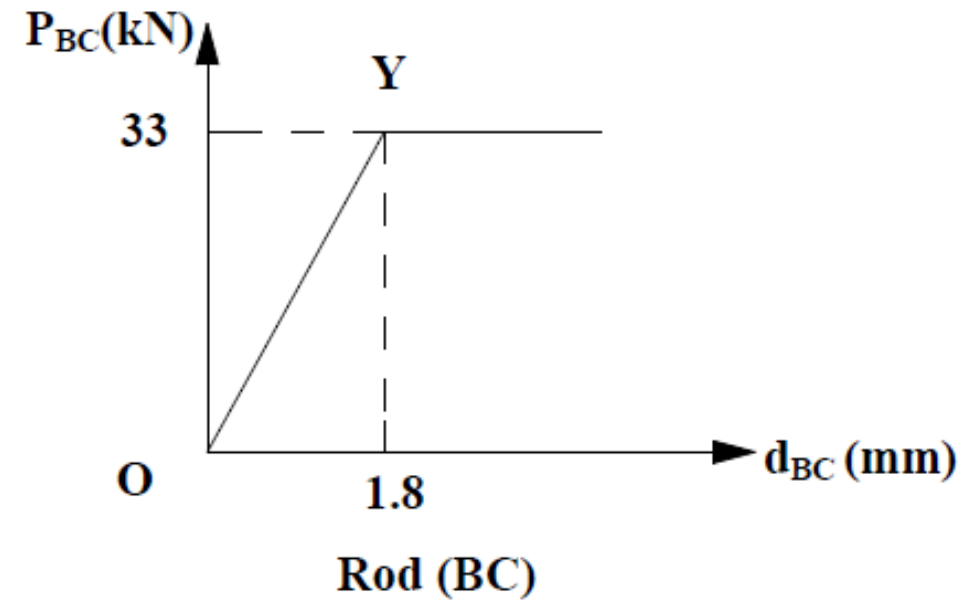
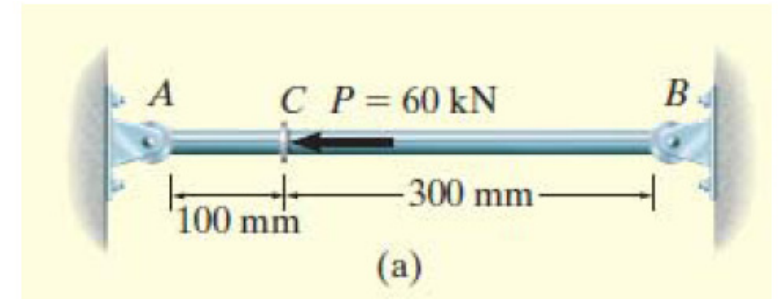


Introduction to Plasticity

Example 02


$$P = P_{AC} + P_{BC}$$

$$\delta = \delta_{AC} = \delta_{BC}$$

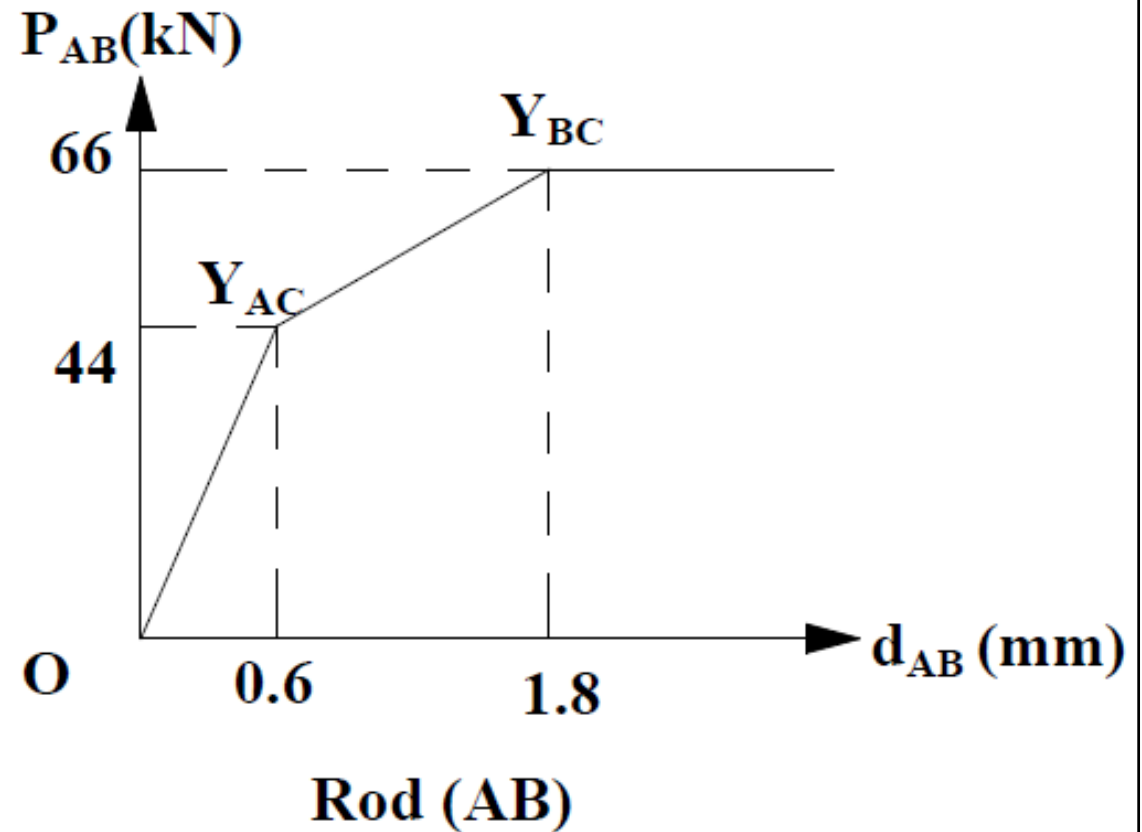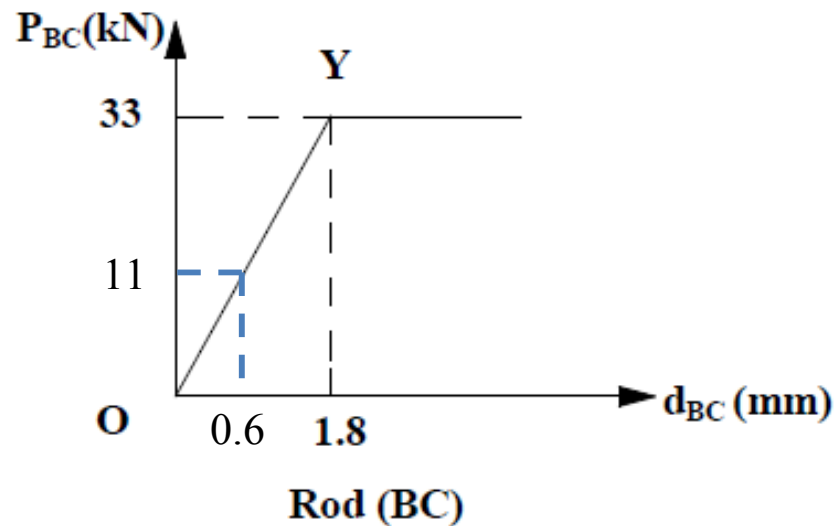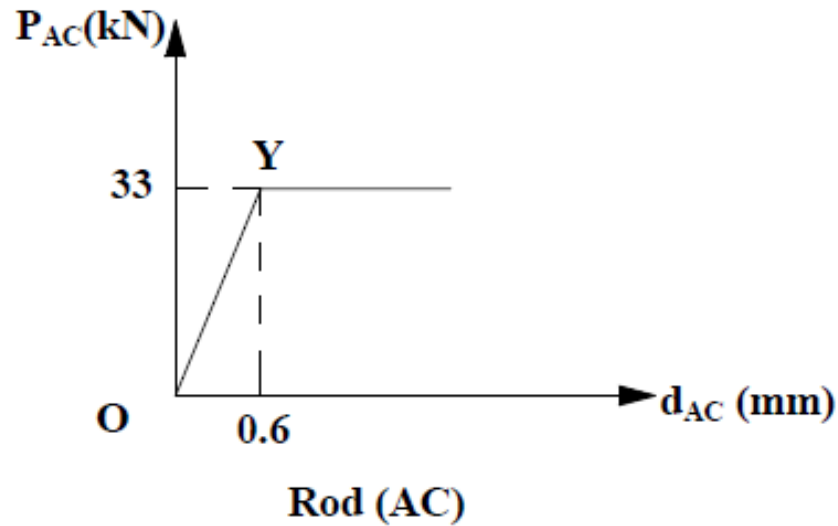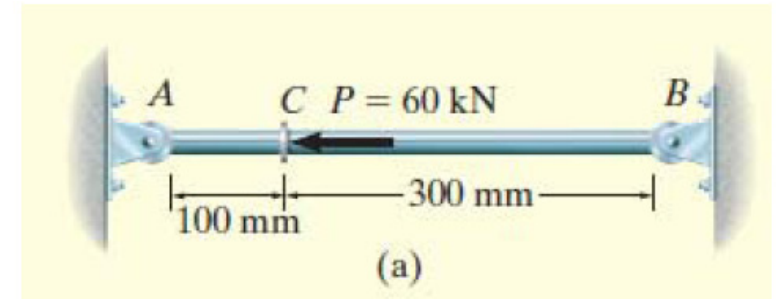


Introduction to Plasticity

Example 02

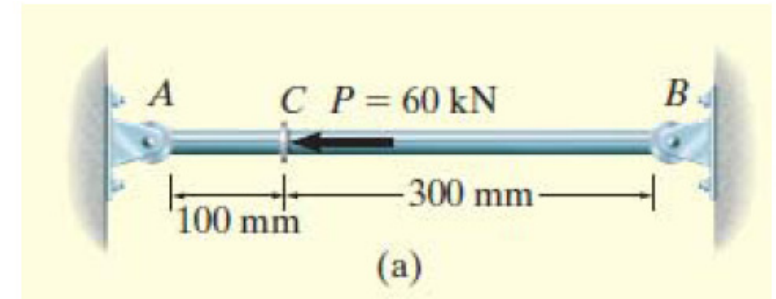


- at a load of $P = 60 \text{ kips}$, the portion AC has reached the plastic range while the portion BC is still in the elastic range

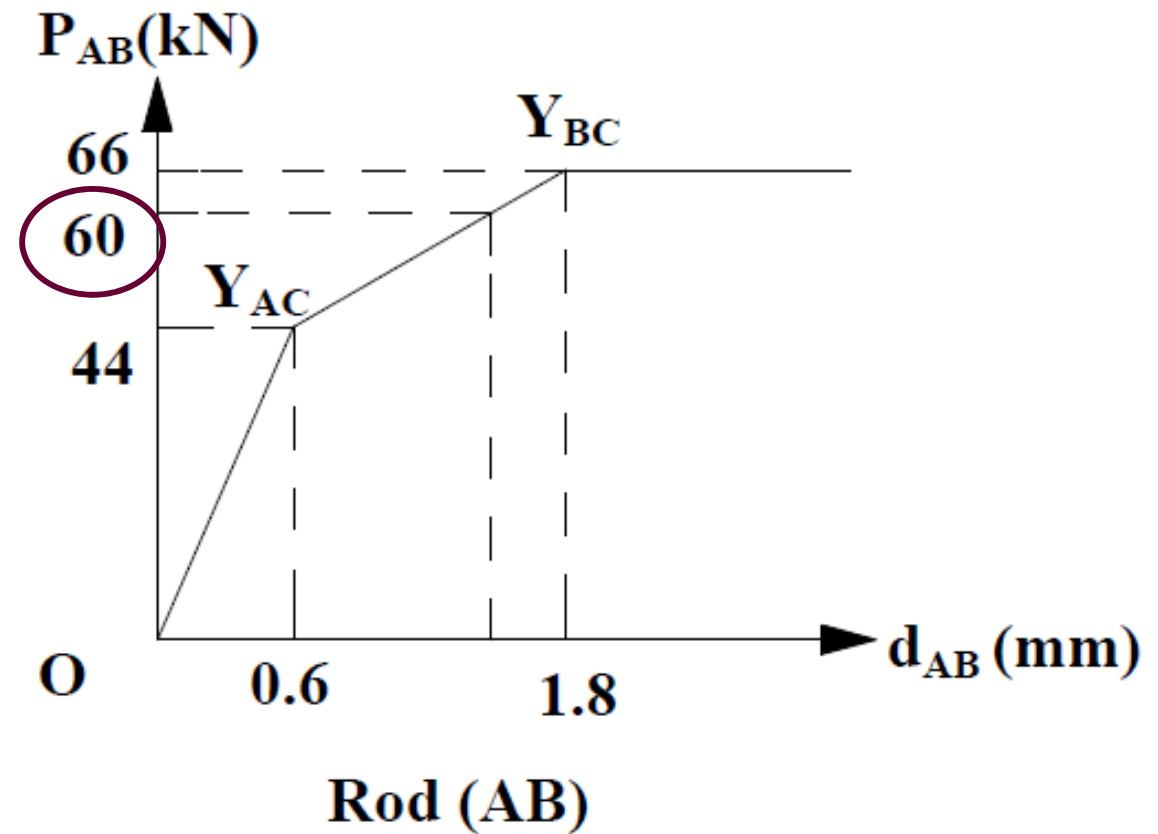




Introduction to Plasticity

Example 02

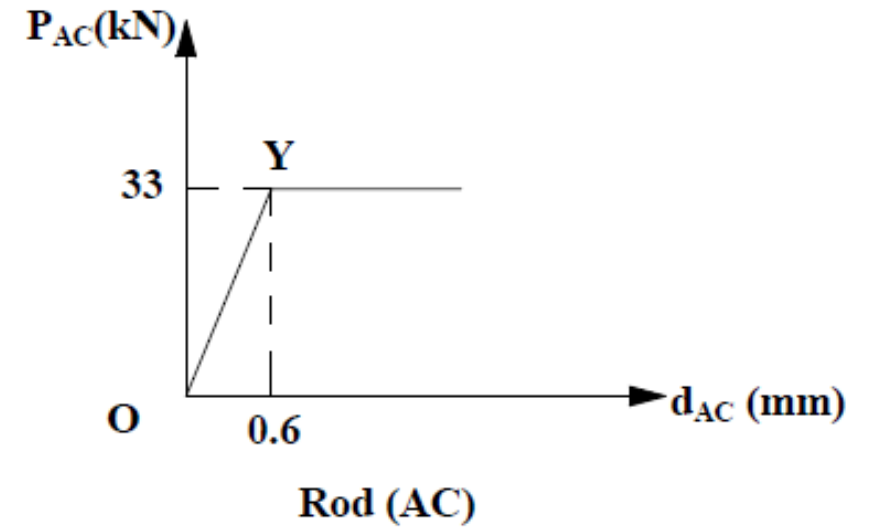

Introduction to Plasticity


Example 02

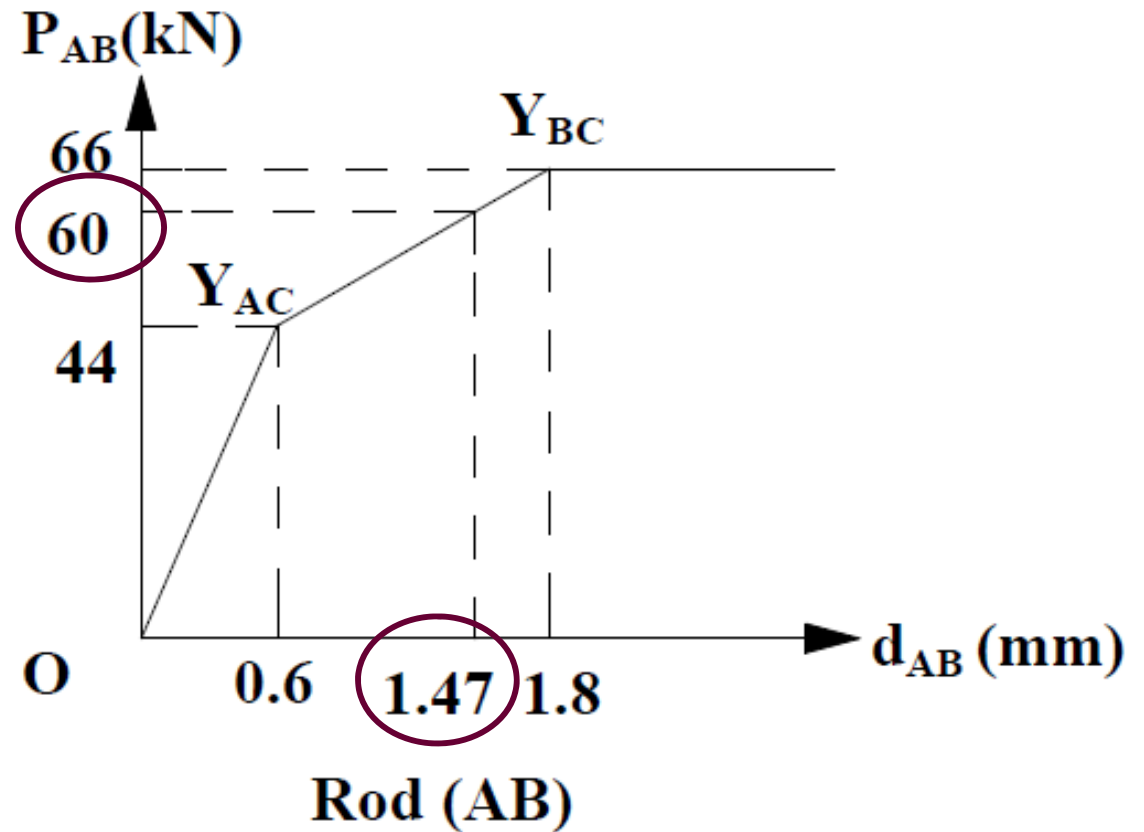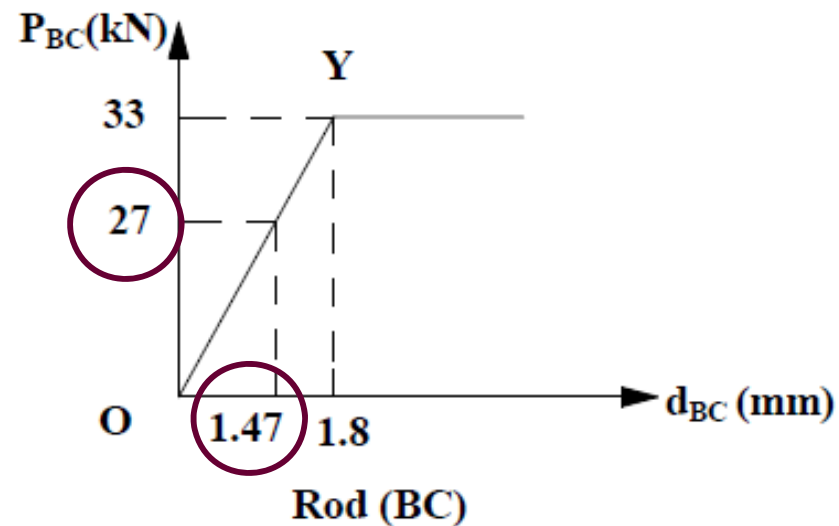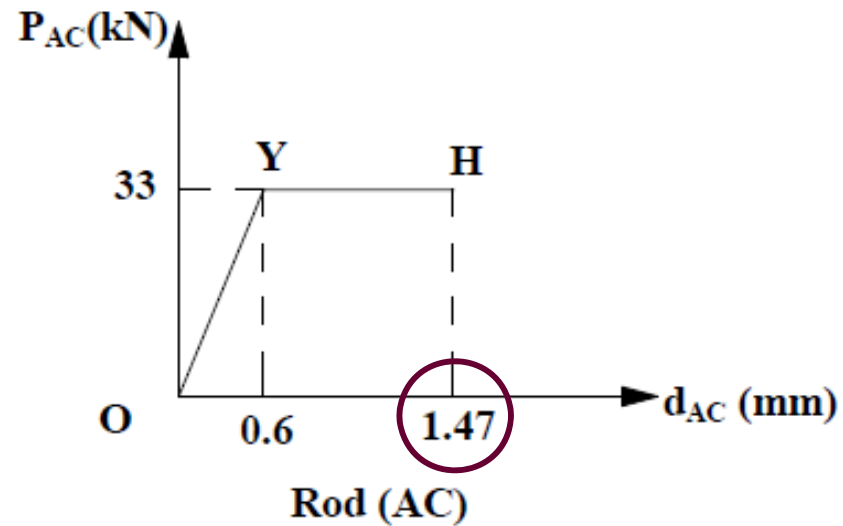

Introduction to Plasticity

Example 02




- The unloads along a line parallel to O- Y_{AC}

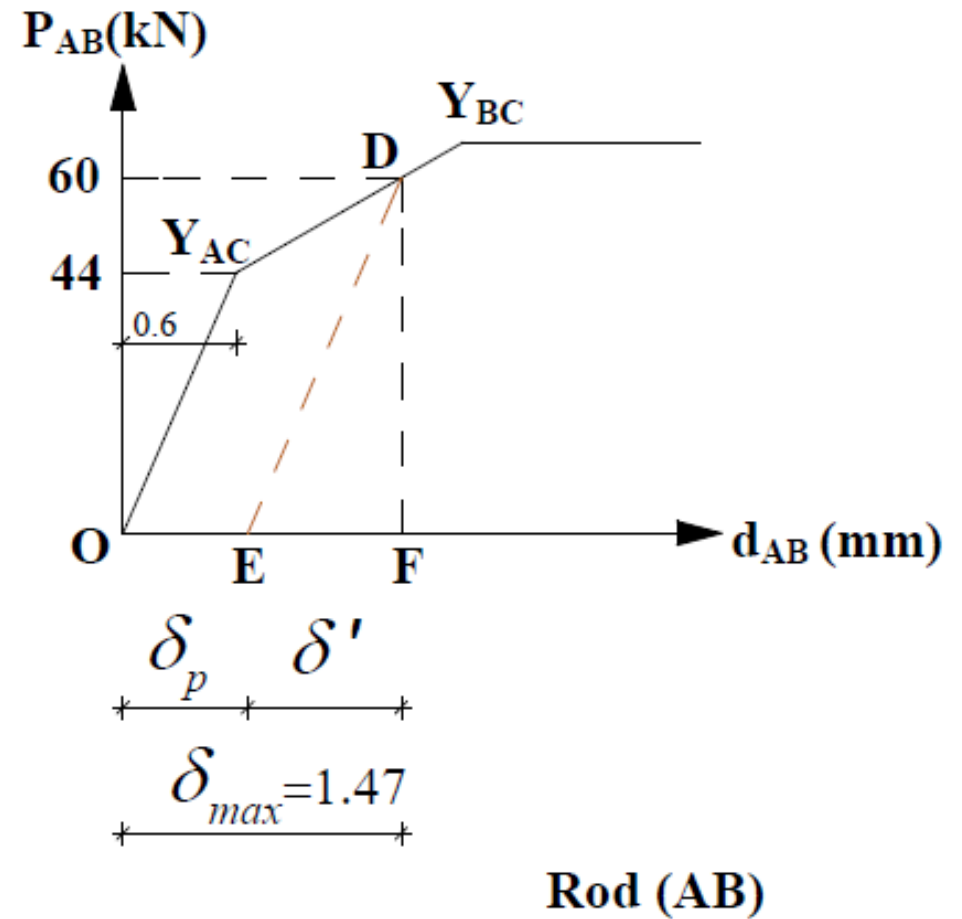

Introduction to Plasticity

Example 02



- calculate the residual stresses in the bar.

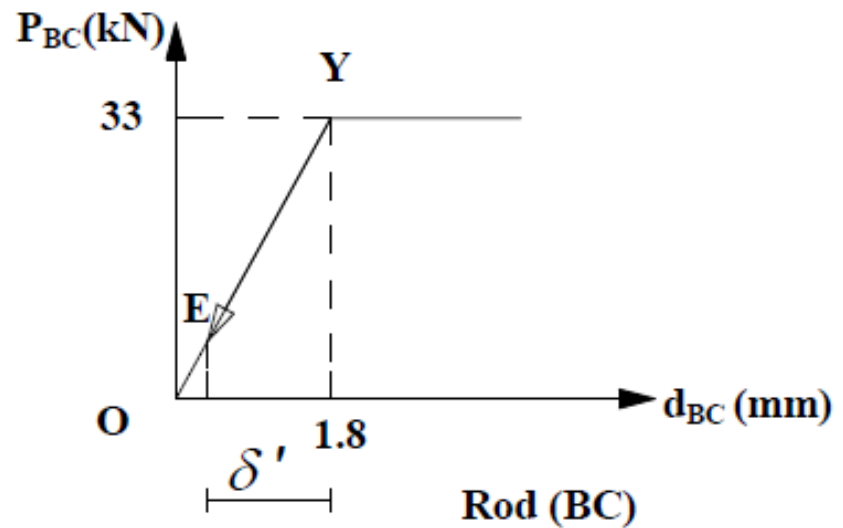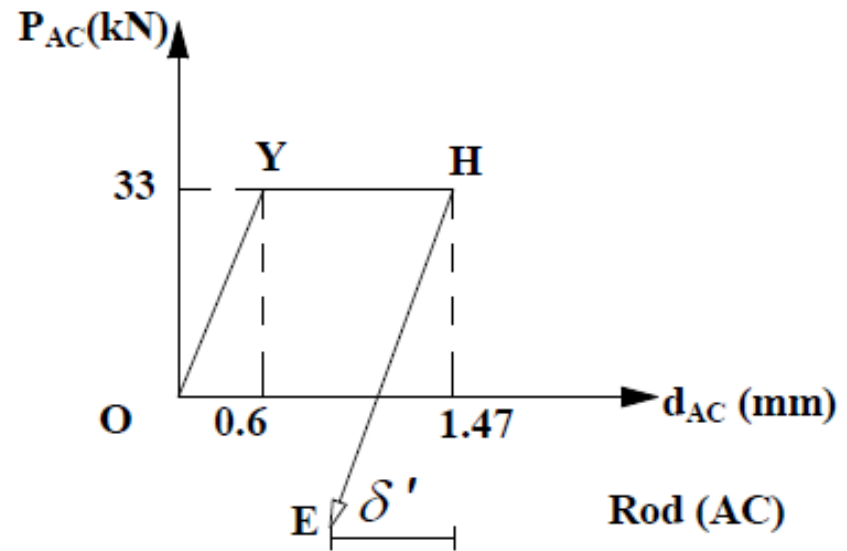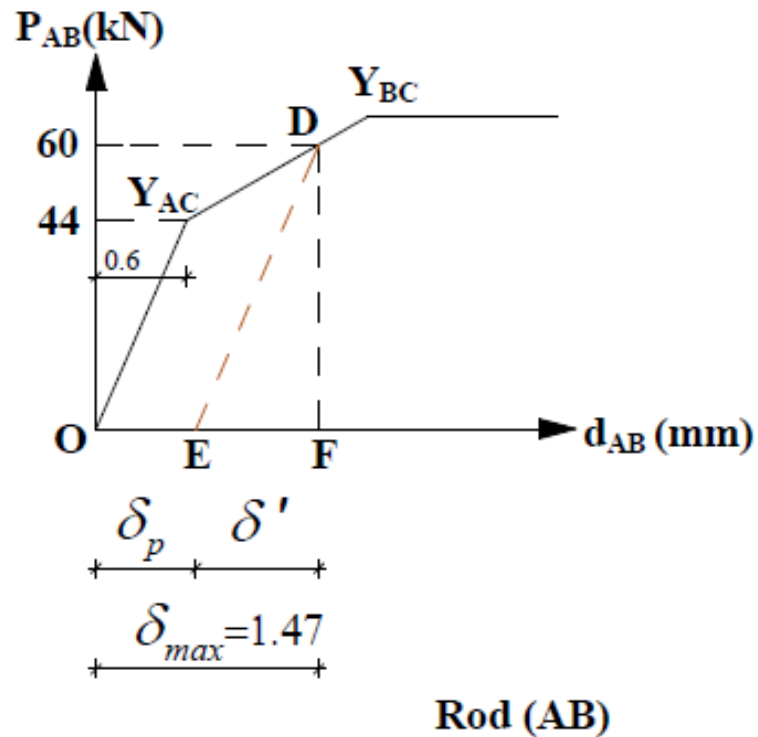

Introduction to Plasticity

Example 02

calculate the reverse stresses in the bar caused by unloading and add them to the maximum stresses.

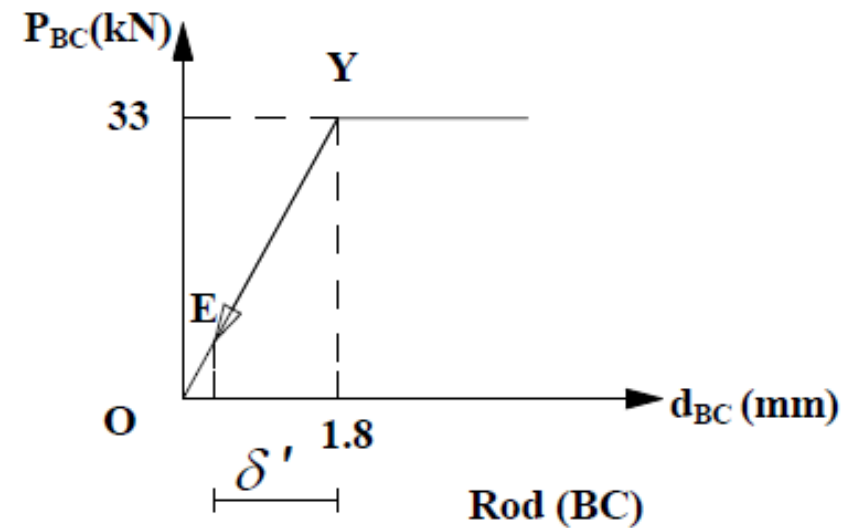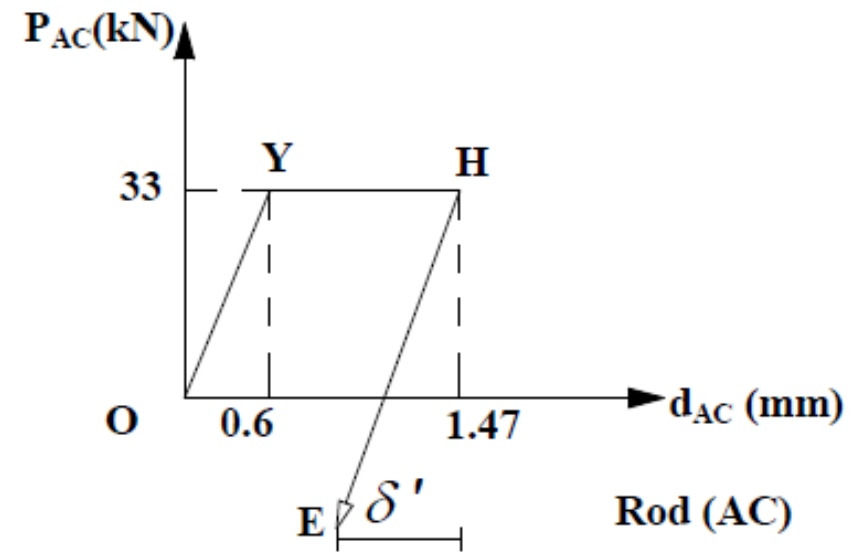


Introduction to Plasticity

Example 03

A cylindrical rod is placed inside a tube of the same length. The ends of the rod and tube are attached to a rigid support on one side and a rigid plate on the other. The load on the rod-tube assembly is increased from zero to 5.7 kips and decreased back to zero.

- draw a load-deflection diagram for the rod-tube assembly
- determine the maximum elongation
- determine the permanent elongation
- calculate the residual stresses in the rod and tube.

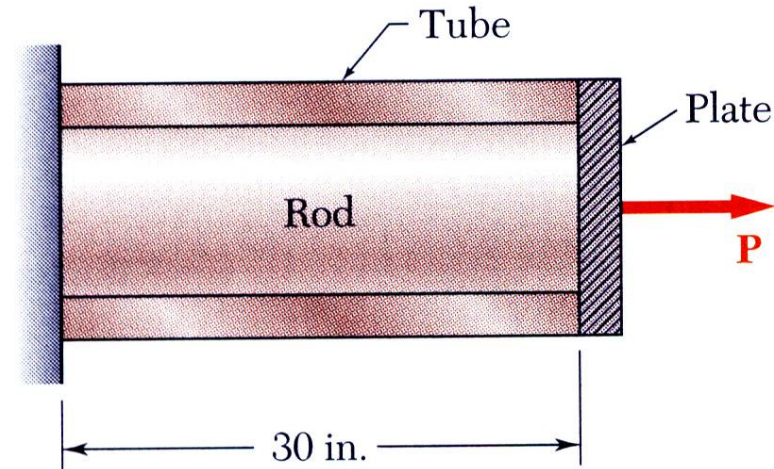

$$A_r = 0.075 \text{ in.}^2$$

$$A_t = 0.100 \text{ in.}^2$$

$$E_r = 30 \times 10^6 \text{ psi}$$

$$E_t = 15 \times 10^6 \text{ psi}$$



$$\sigma_{Y,r} = 36 \text{ ksi}$$

$$\sigma_{Y,t} = 45 \text{ ksi}$$

Introduction to Plasticity

Example 03



- a) draw a load-deflection diagram for the rod-tube assembly

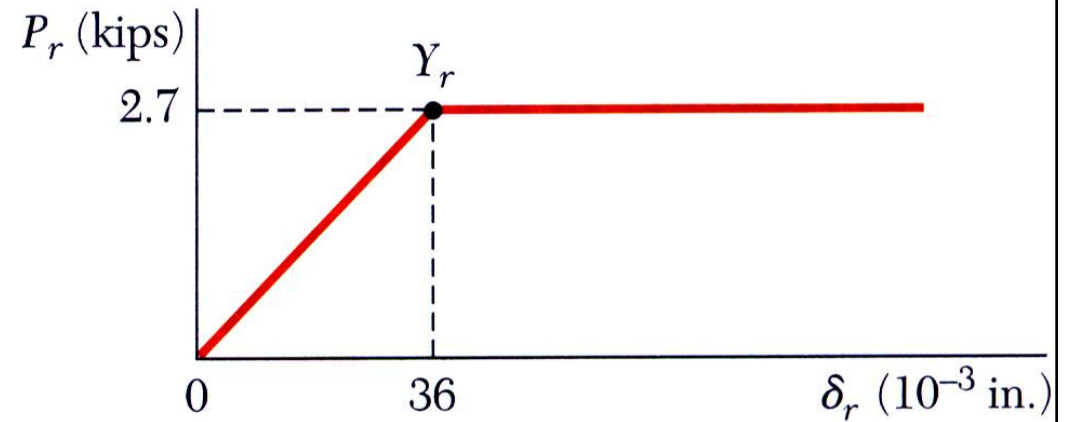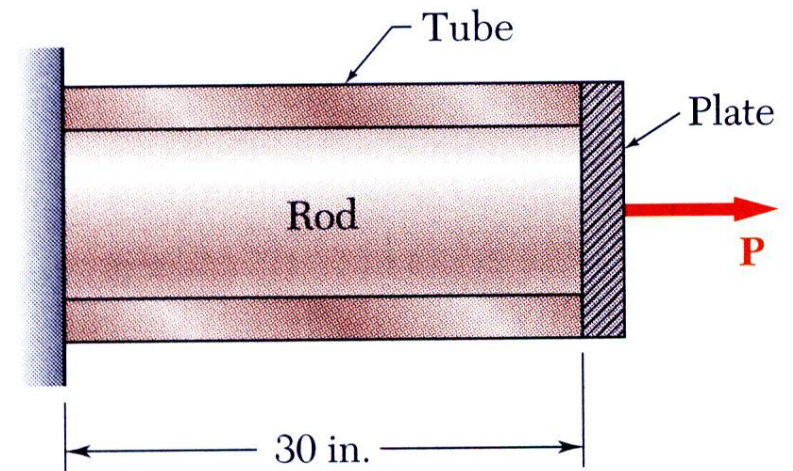

Introduction to Plasticity

Example 03

- a) draw a load-deflection diagram for the rod-tube assembly


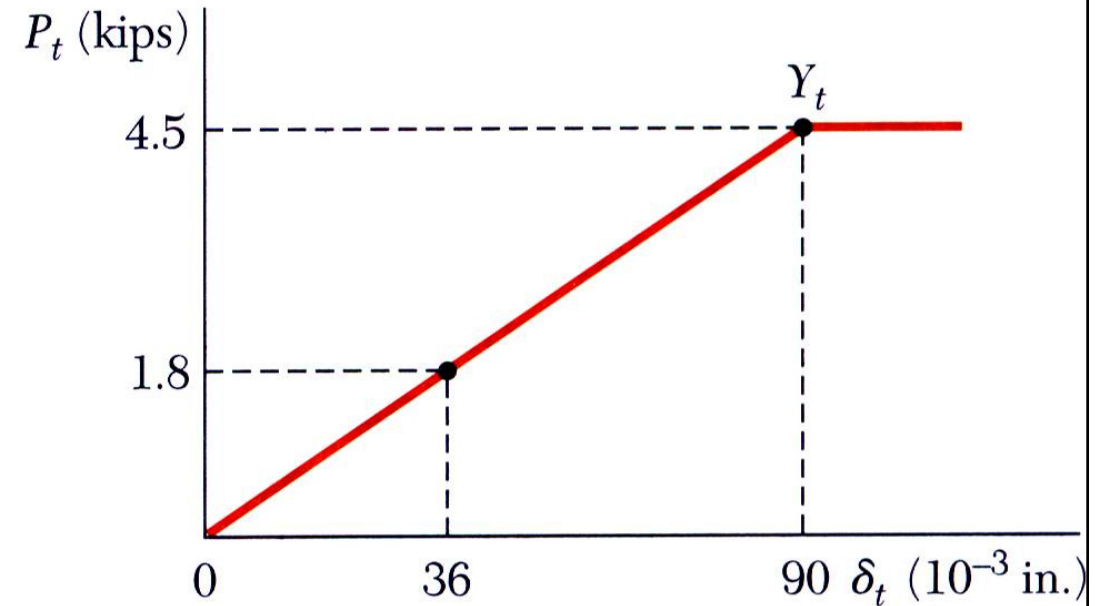
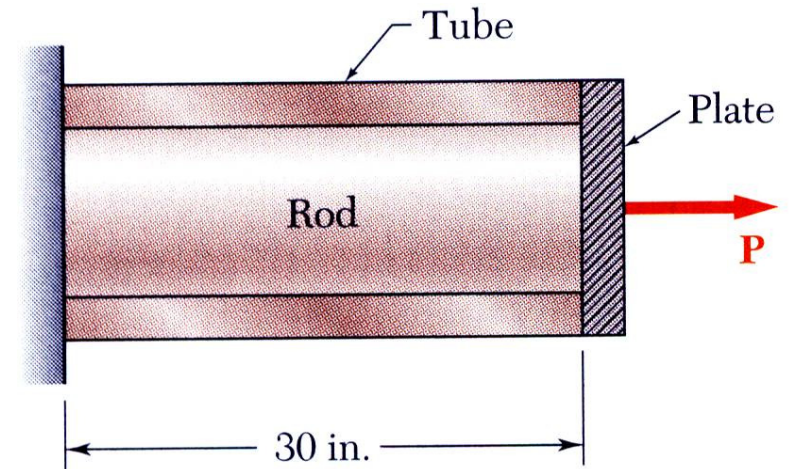


Introduction to Plasticity

Example 03

a) draw a load-deflection diagram for the rod-tube assembly


$$P = P_r + P_t$$
$$\delta = \delta_r = \delta_t$$

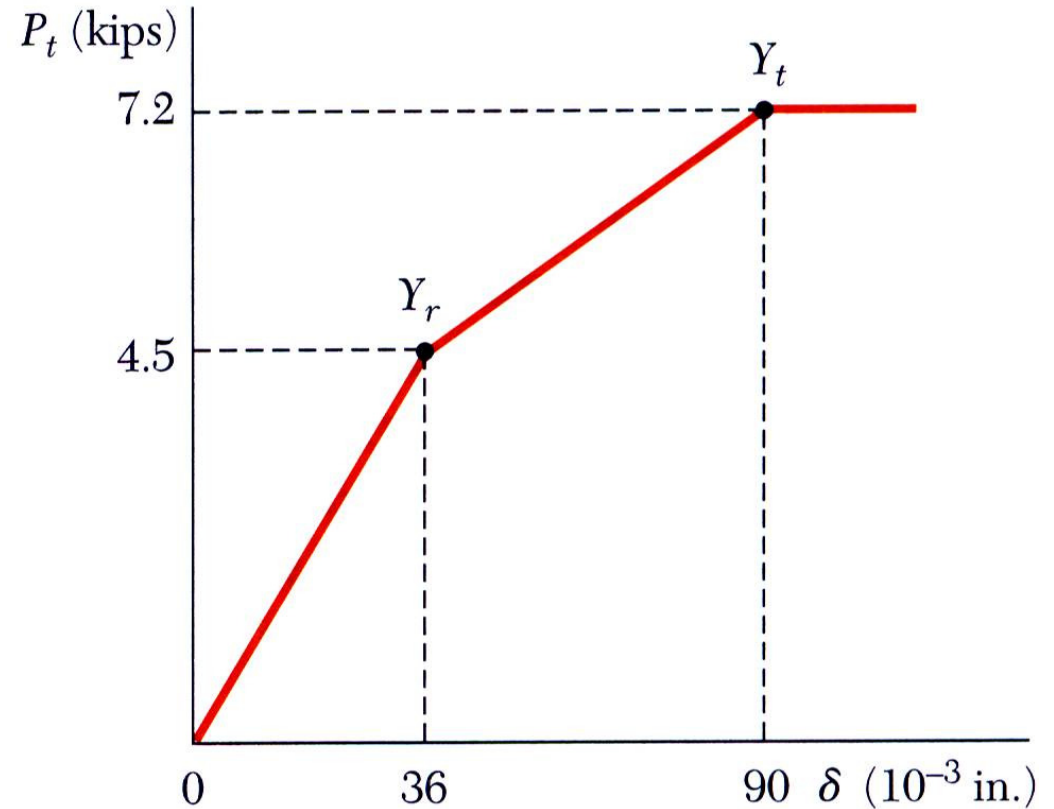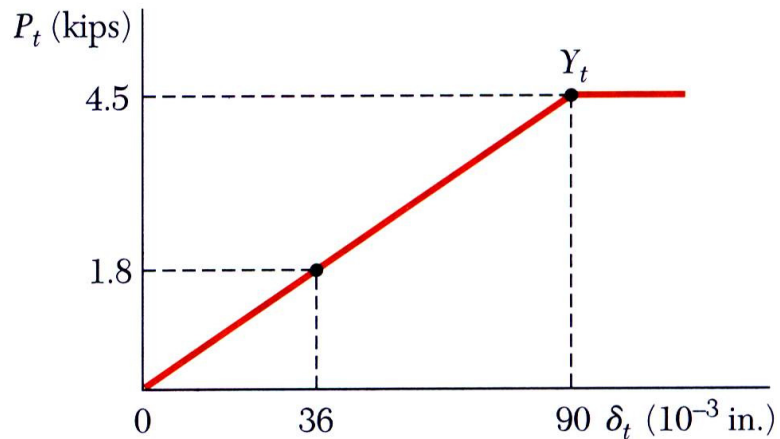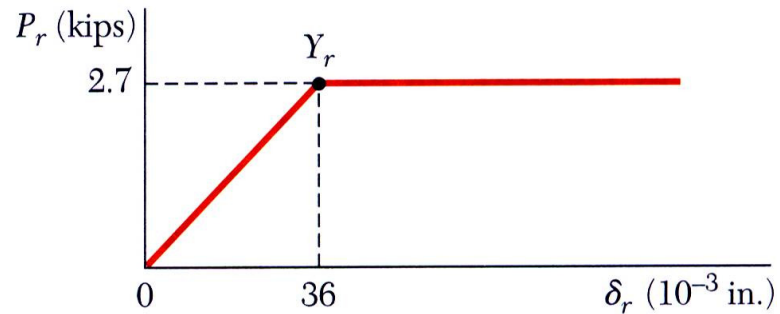

Introduction to Plasticity


Example 03

- at a load of $P = 5.7$ kips, the rod has reached the plastic range while the tube is still in the elastic range

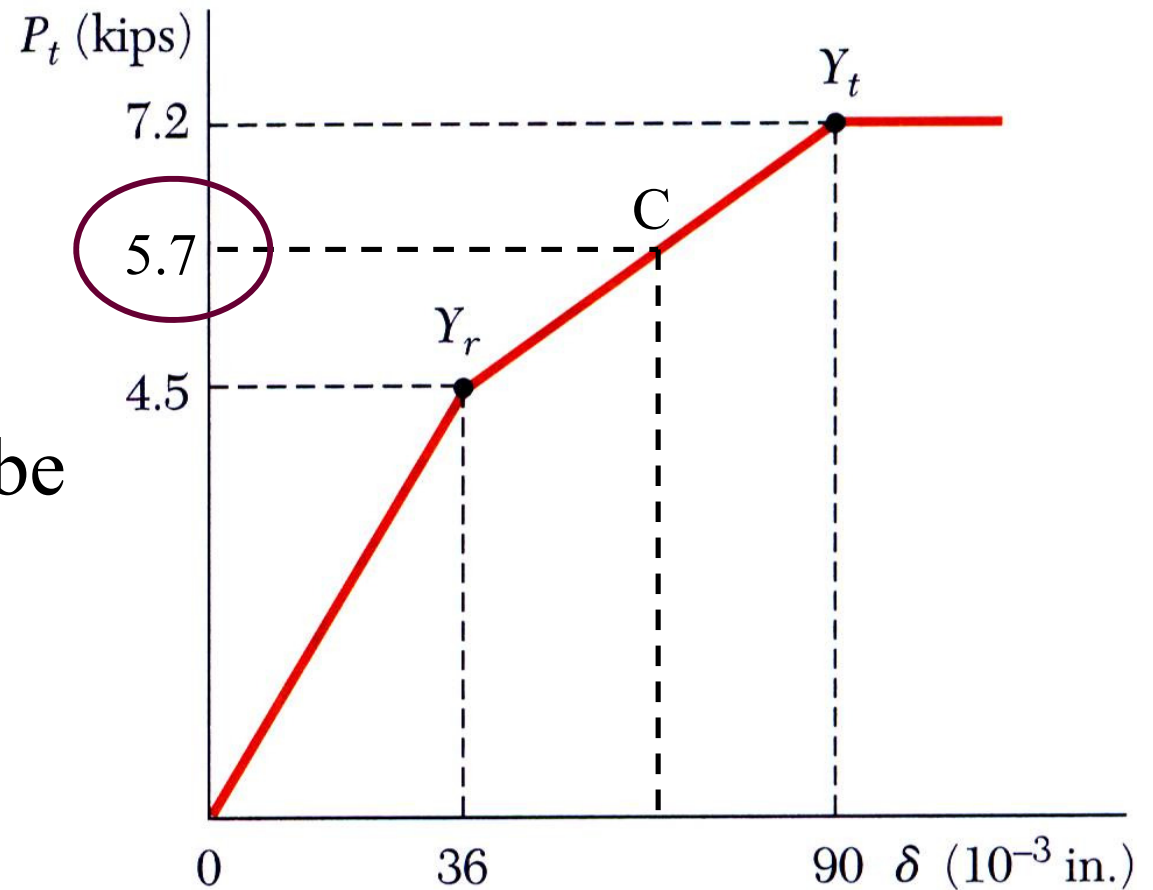




Introduction to Plasticity

Example 03

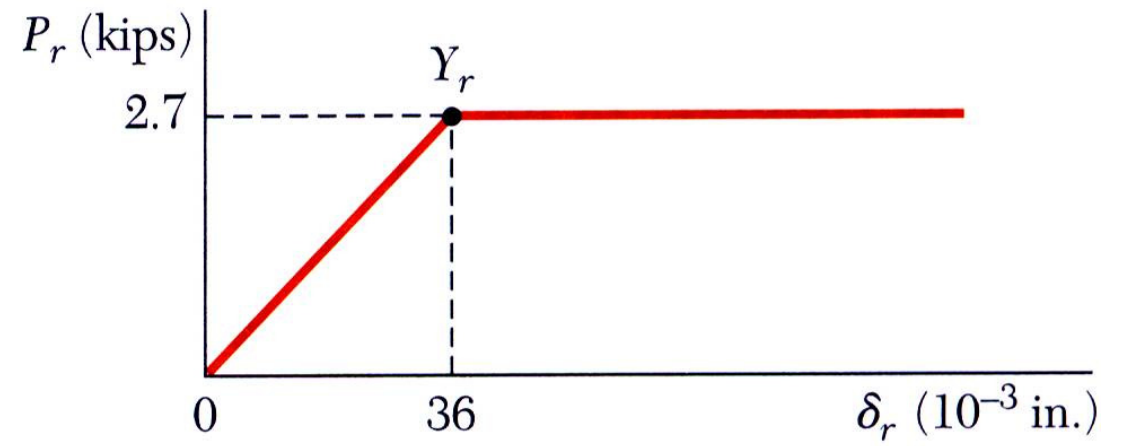

Introduction to Plasticity


Example 03

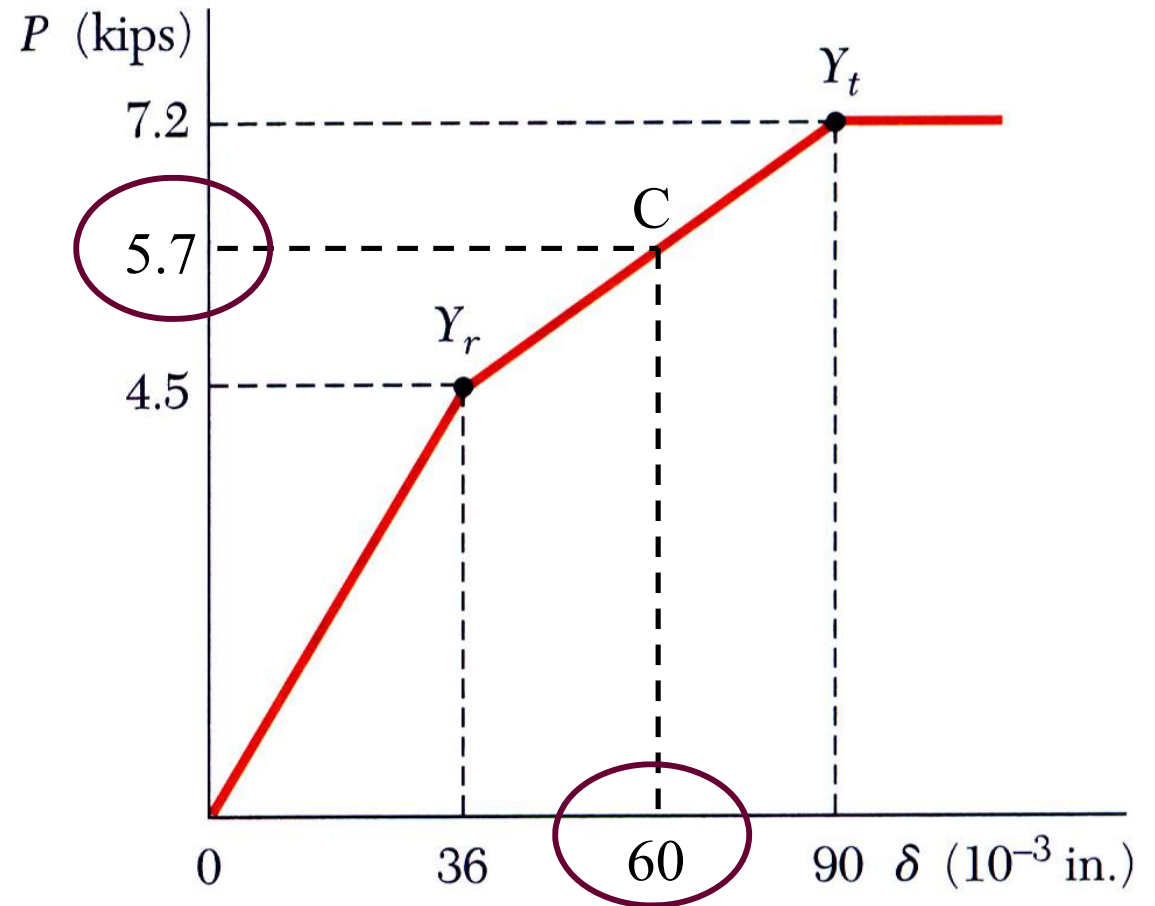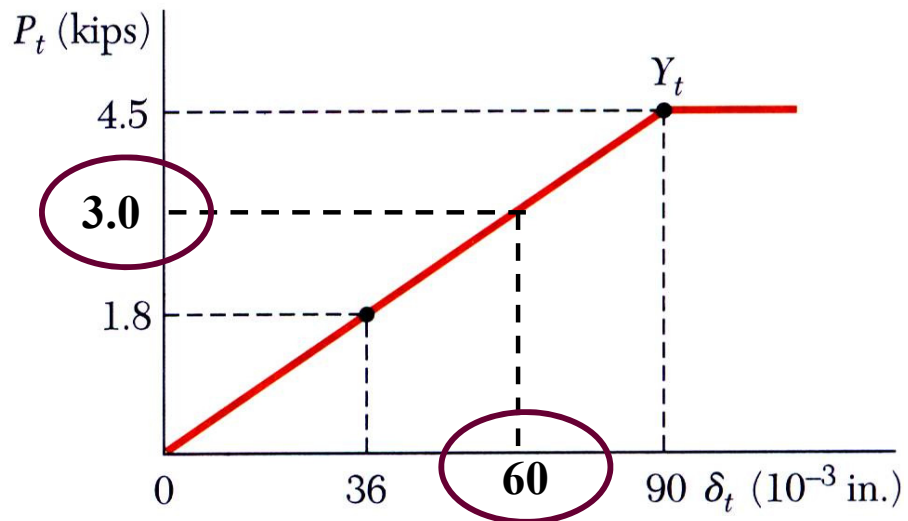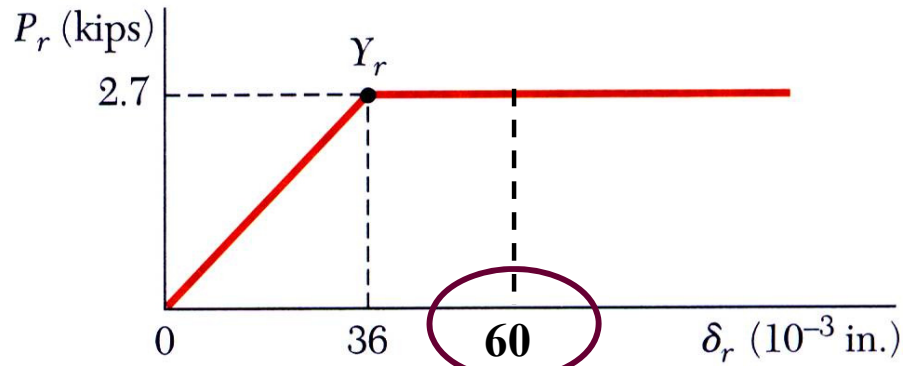

Introduction to Plasticity

Example 03




- the rod-tube assembly unloads along a line parallel to 0- Y_r

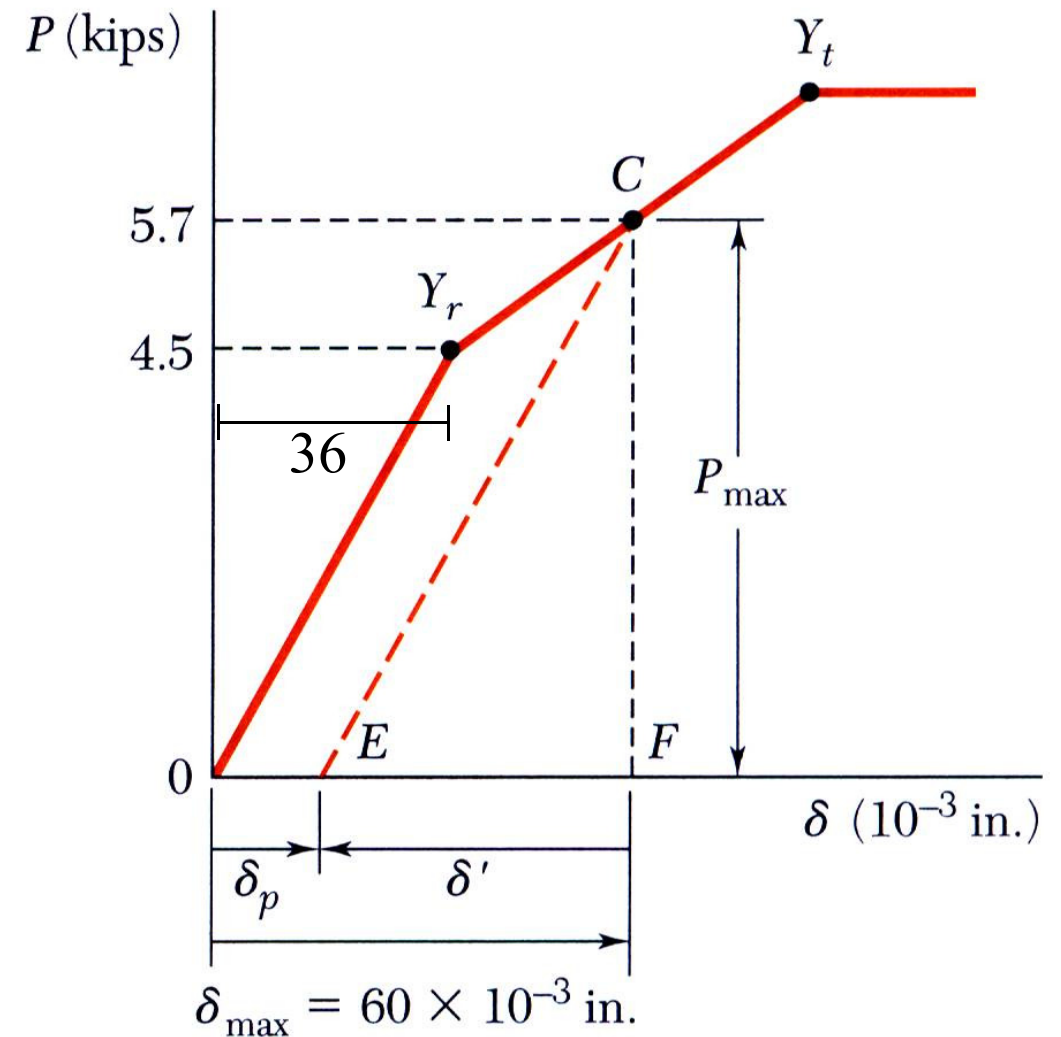

Introduction to Plasticity

Example 03


- calculate the residual stresses in the rod and tube.

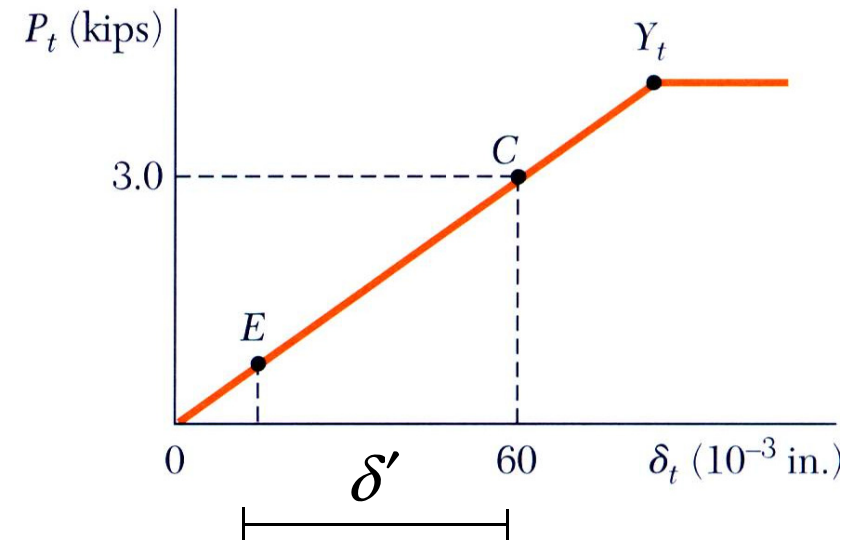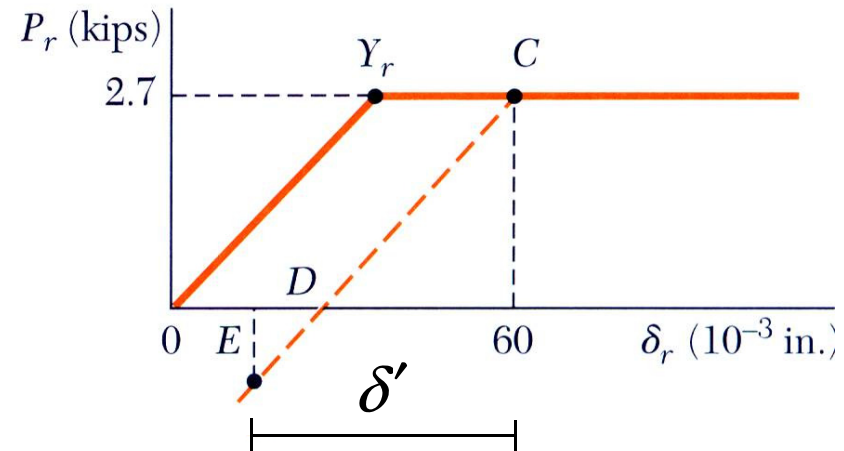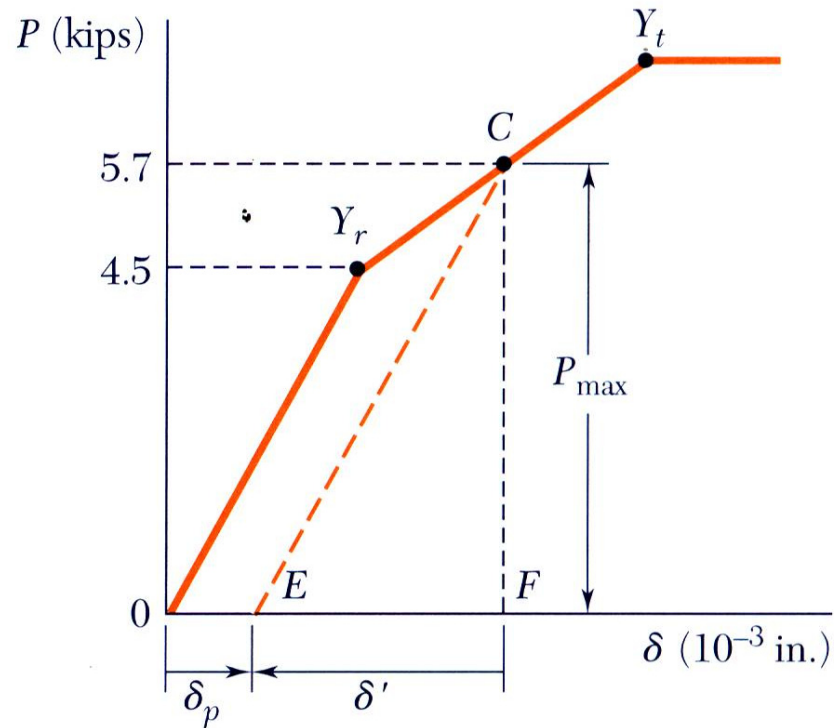

Introduction to Plasticity

Example 03

calculate the reverse stresses in the rod and tube caused by unloading and add them to the maximum stresses.

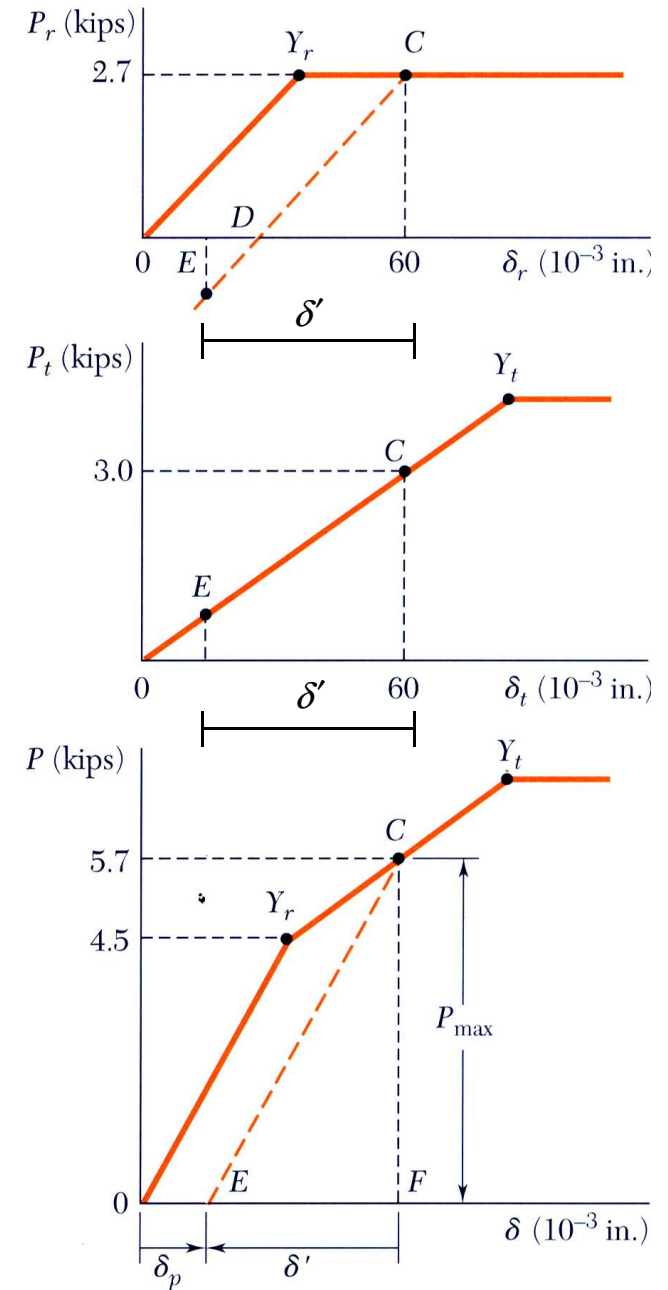


Introduction to Plasticity

Example 04

The rigid beam ABC is suspended from two steel rods as shown and is initially horizontal. The midpoint B of the beam is deflected 10 mm downward by the slow application of the force Q, after which the force is slowly removed. Knowing that the steel used for the rods is Elastoplastic with $E = 200 \text{ GPa}$ and $\sigma_y = 300 \text{ MPa}$, determine

- the required maximum value of Q and the corresponding position of the beam,
- the final position of the beam.

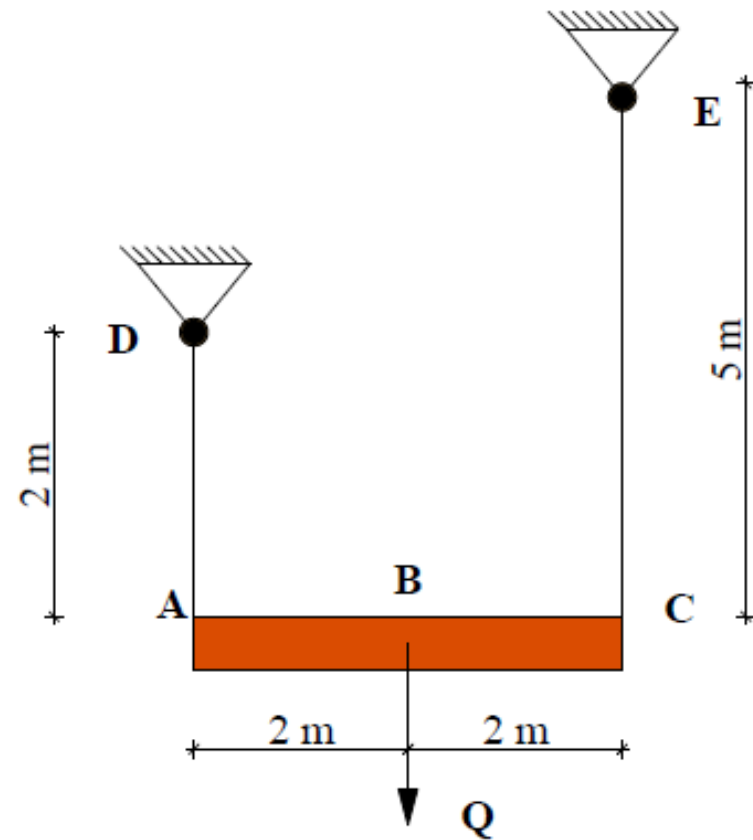

$$A_{AD} = 400 \text{ mm}^2$$



$$A_{CE} = 500 \text{ mm}^2$$

Introduction to Plasticity

Example 04



Since Q is applied at the midpoint of the beam, we have

The maximum value of Q and the maximum elastic deflection of point A occur when $\sigma_{AD} = \sigma_Y$ in rod AD.

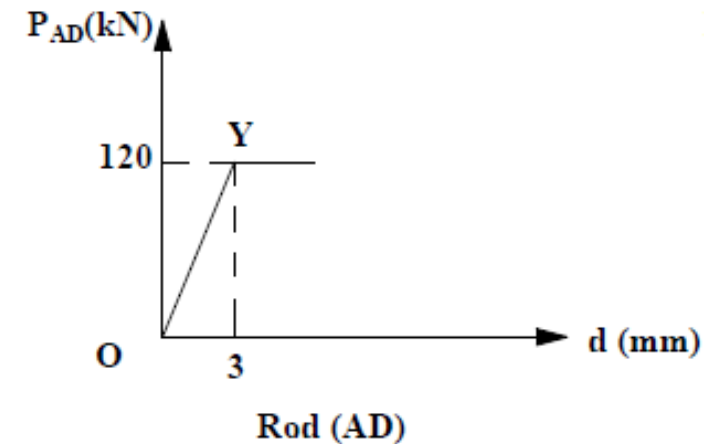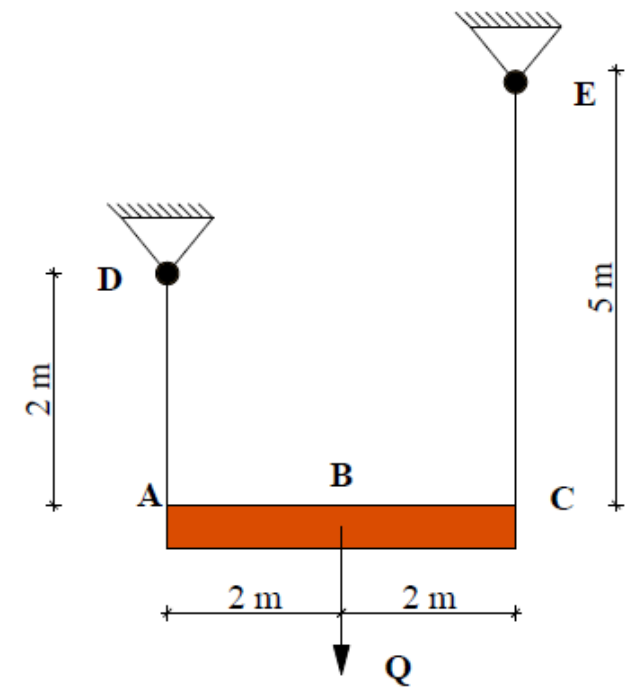

Introduction to Plasticity

Example 04

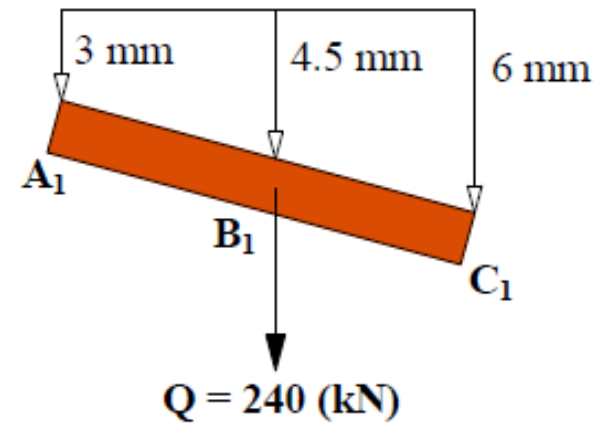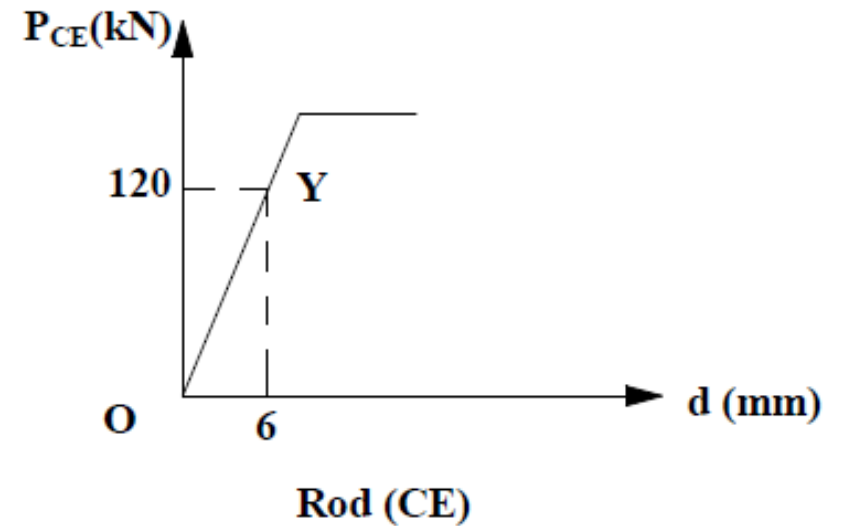


Since we must have $\delta_{B_1} = 10$ mm, we conclude that plastic deformation will occur.


Introduction to Plasticity

Example 04

Plastic Deformation. For $Q = 240$ kN, plastic deformation occurs in rod AD , where $\sigma_{AD} = \sigma_Y$. Since the stress in rod CE is within the elastic range, δ_C remains equal to 6 mm. The deflection δ_A for which $\delta_B = 10$ mm is obtained by writing

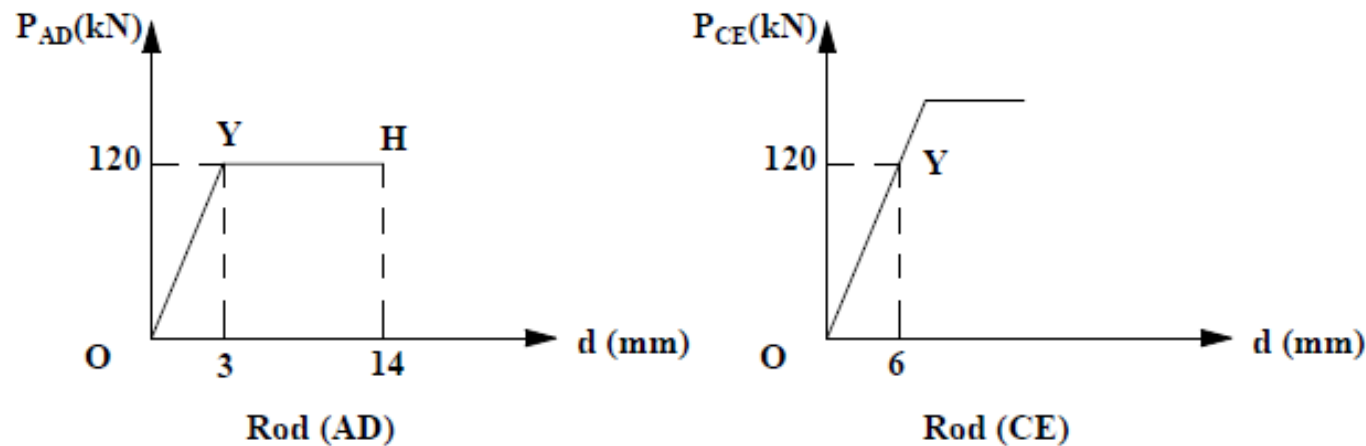


Load-Deflection diagrams

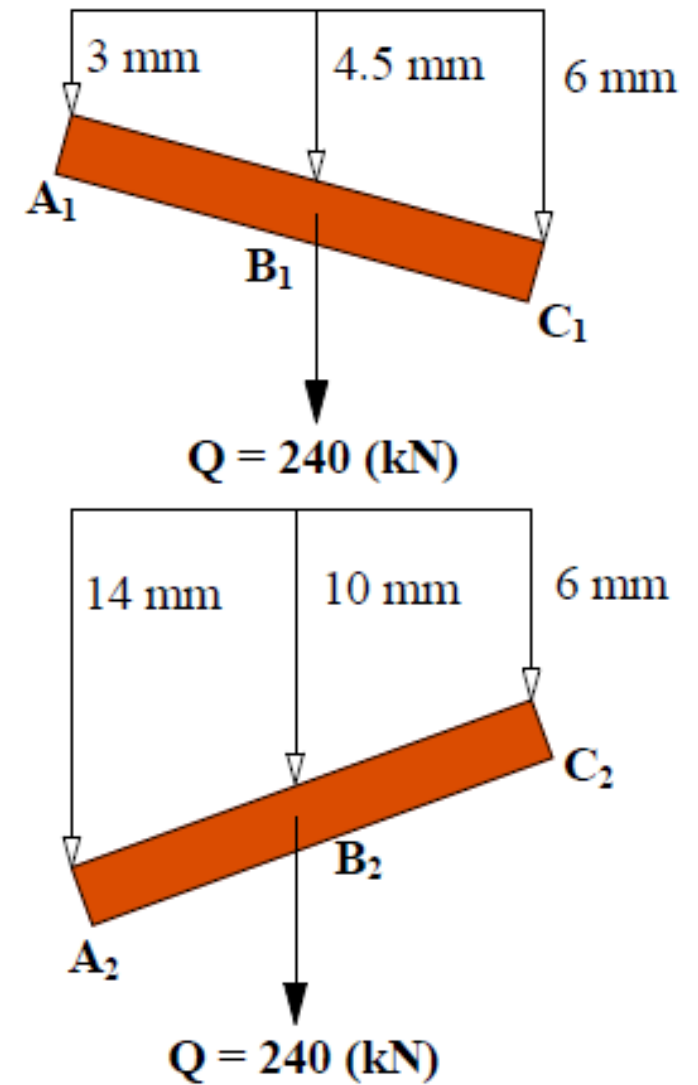



Introduction to Plasticity

Example 04

Unloading. As force Q is slowly removed, the force P_{AD} decreases along line HI parallel to the initial portion of the load-deflection diagram of rod AD . The final deflection of point A is

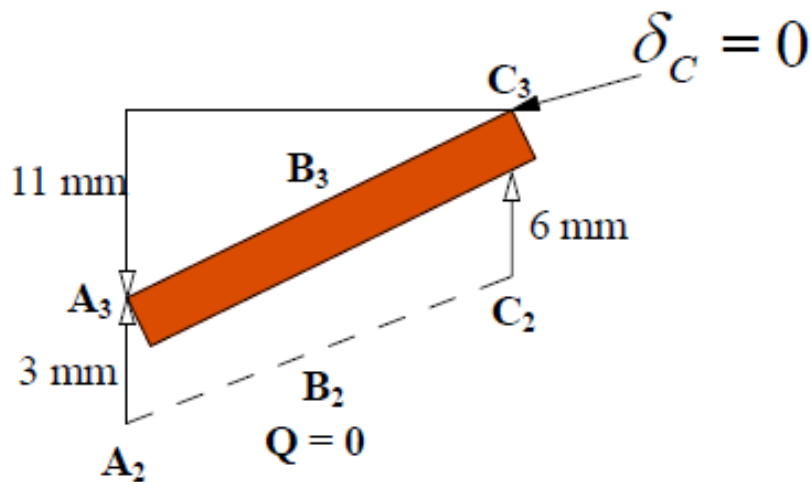

Since the stress in rod CE remained within the elastic range, we note that the final deflection of point C is zero.

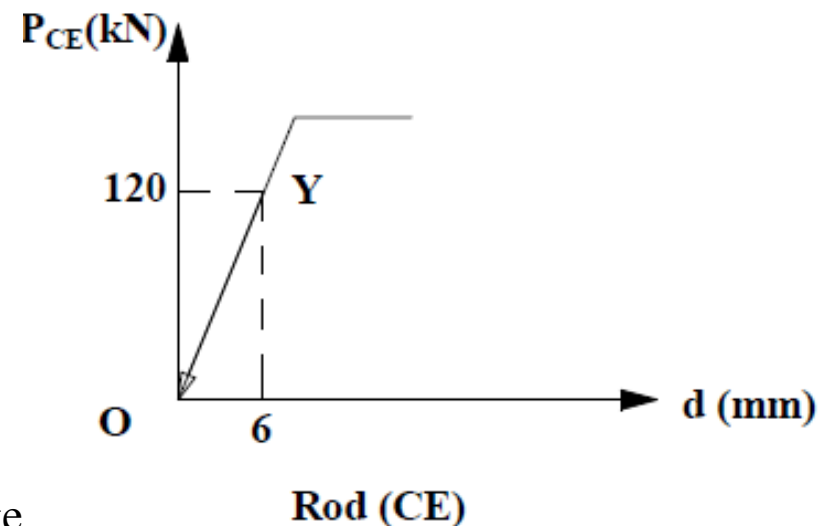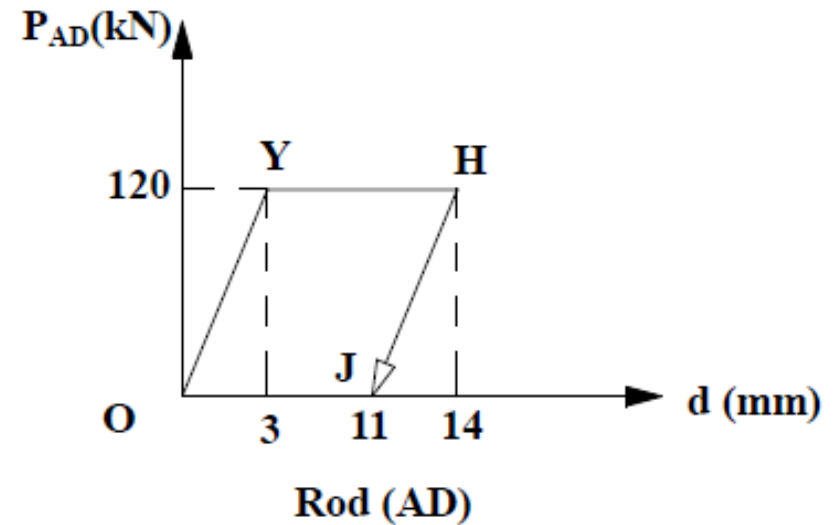


Load-Deflection diagrams

Introduction to Plasticity

Example 05


The steel rod ABC is attached to rigid supports and is unstressed at a temperature of $20^{\circ}C$. The steel is assumed Elastoplastic, with $\sigma_Y = 250$ MPa and $E = 200$ GPa. The temperature of both portions of the rod is then raised to $120^{\circ}C$. Knowing that $\alpha = 11.7 \times 10^{-6} / ^{\circ}C$, determine (a) the stress in portion AC , (b) the deflection of point C .

assuming that the temperature of the rod is raised to $120^{\circ}C$ and then returned to $20^{\circ}C$, determine (c) the stress in portion AC , (d) the deflection of point C .

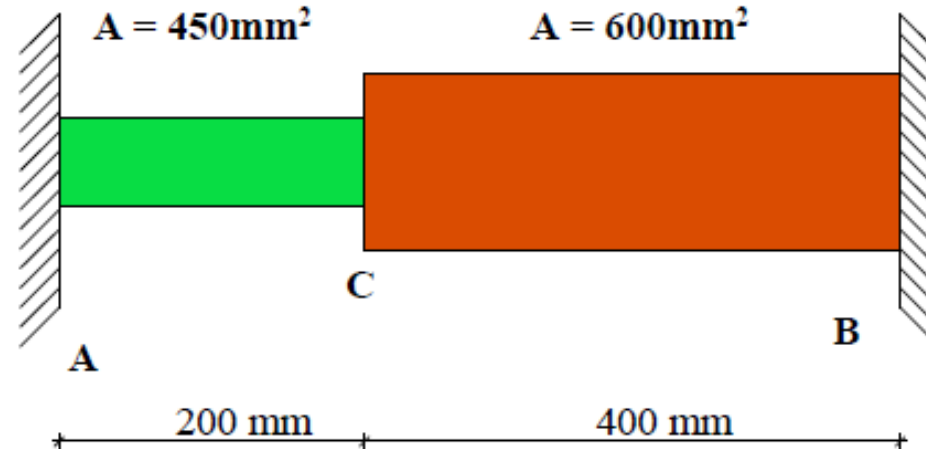


Introduction to Plasticity


Example 05

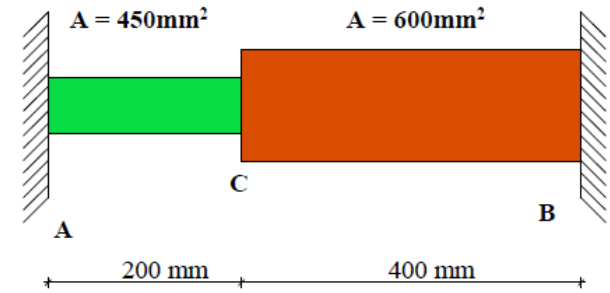


$$T = 20^\circ \text{C}$$

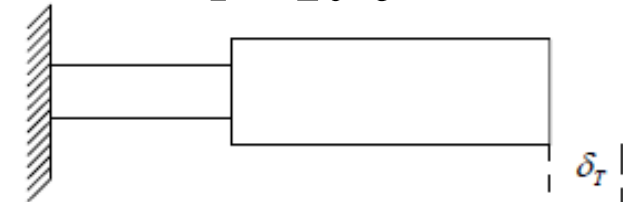

$$T = 120^\circ \text{C}$$

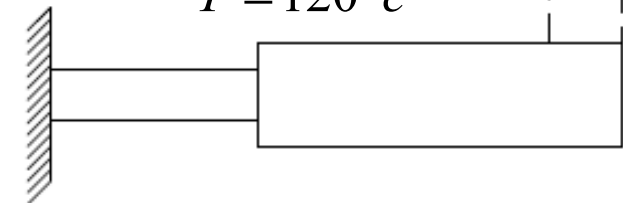


$$T = 120^\circ \text{C}$$

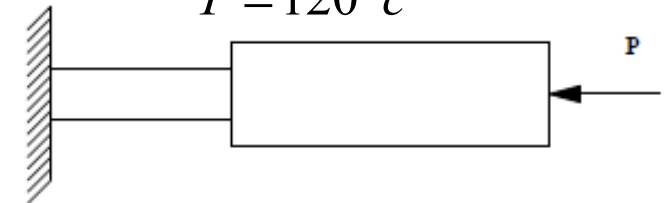


Introduction to Plasticity


Example 05

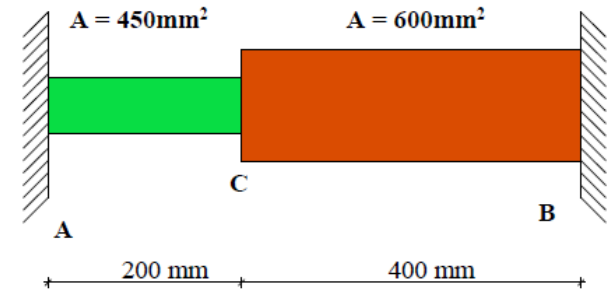


$$T = 20^\circ \text{C}$$

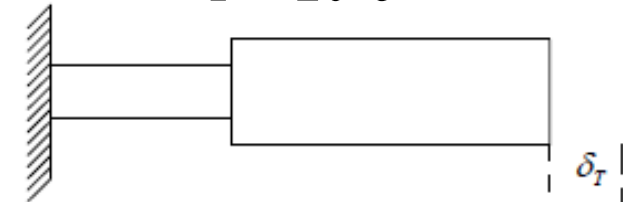

$$T = 120^\circ \text{C}$$

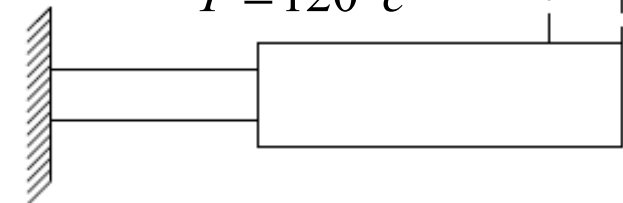


$$T = 120^\circ \text{C}$$

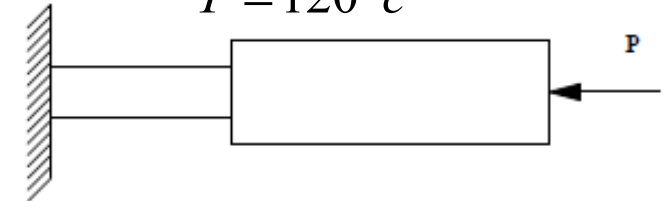


Introduction to Plasticity


Example 05

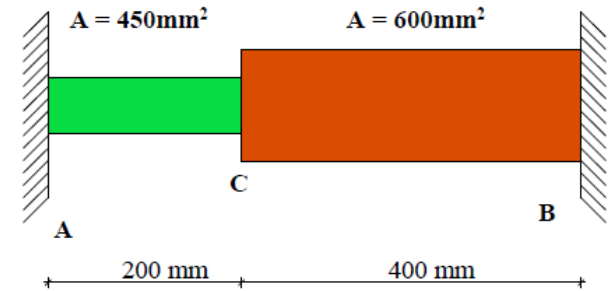


$$T = 20^\circ \text{C}$$

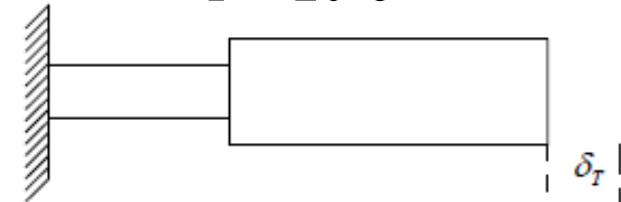

$$T = 120^\circ \text{C}$$

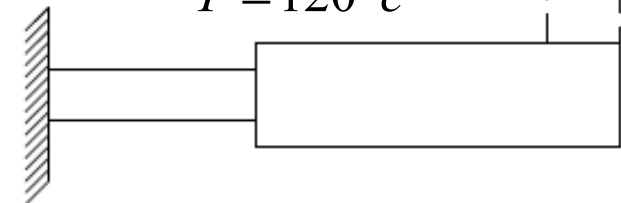


$$T = 120^\circ \text{C}$$

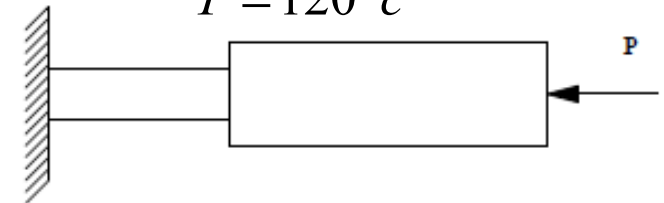

Introduction to Plasticity

Example 05


The temperature of the rod returned to 20°C

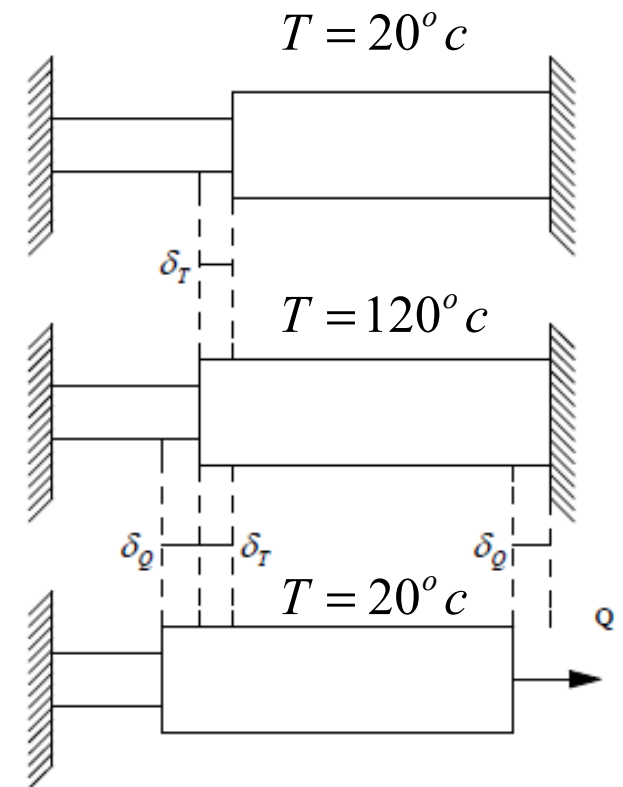

Introduction to Plasticity

Example 05

The temperature of the rod returned to 20°C

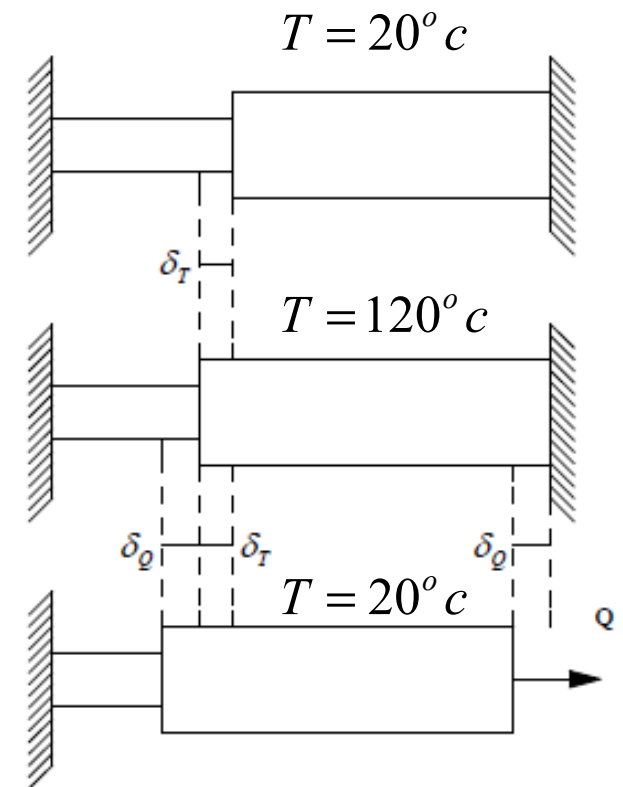



Introduction to Plasticity

□ Plastic Deformations due to torsion

Shearing strain varies linearly regardless of material properties.

$$\gamma = \frac{\rho}{c} \gamma_{\max}$$


- If the yield strength is exceeded or the material has a nonlinear shearing-stress-strain curve, this expression does not hold.

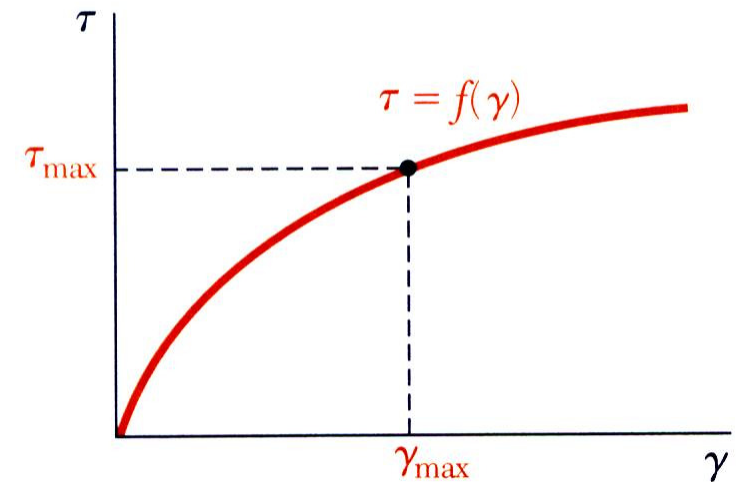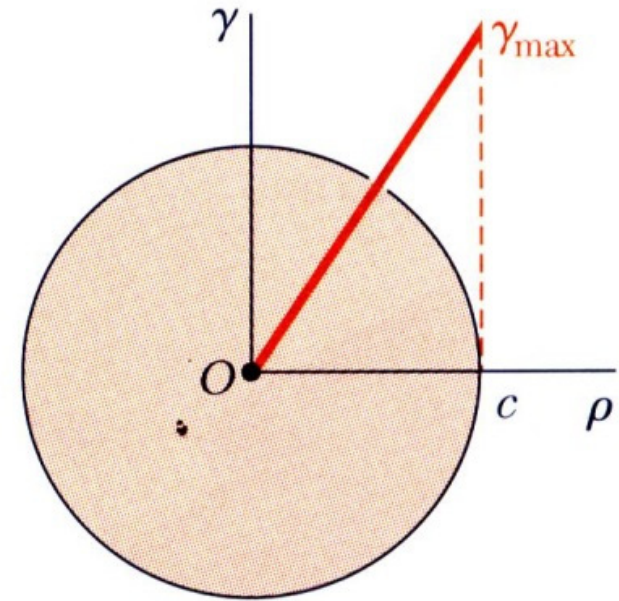


Introduction to Plasticity

□ Plastic Deformations due to torsion

- Application of shearing-stress-strain curve allows determination of stress distribution.

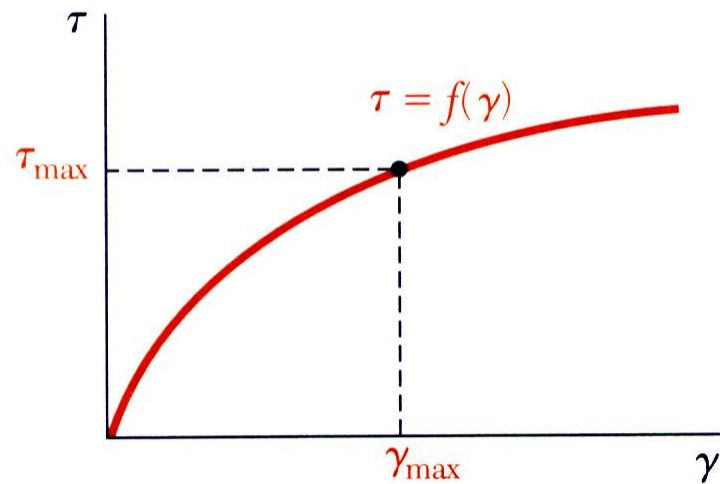

$$\gamma = \frac{\rho}{c} \gamma_{\max}$$

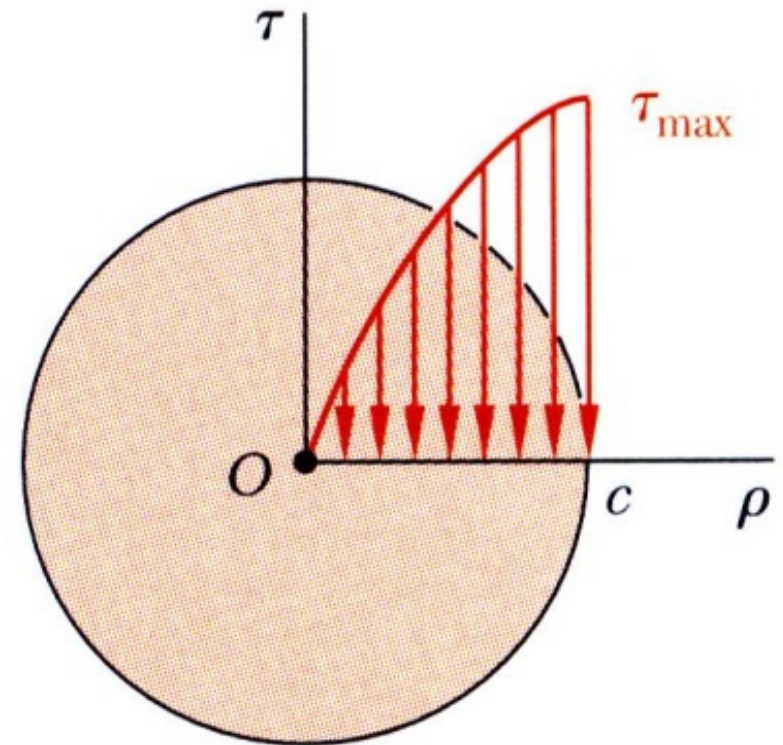

Introduction to Plasticity


□ Plastic Deformations due to torsion

- The integral of the moments from the internal stress distribution is equal to the torque on the shaft at the section,

$$T = \int_0^c \rho \tau dA \Rightarrow$$

$$T = \int_0^c \rho \tau (2\pi \rho d\rho)$$






$$\Rightarrow T = 2\pi \int_0^c \rho^2 \tau d\rho$$

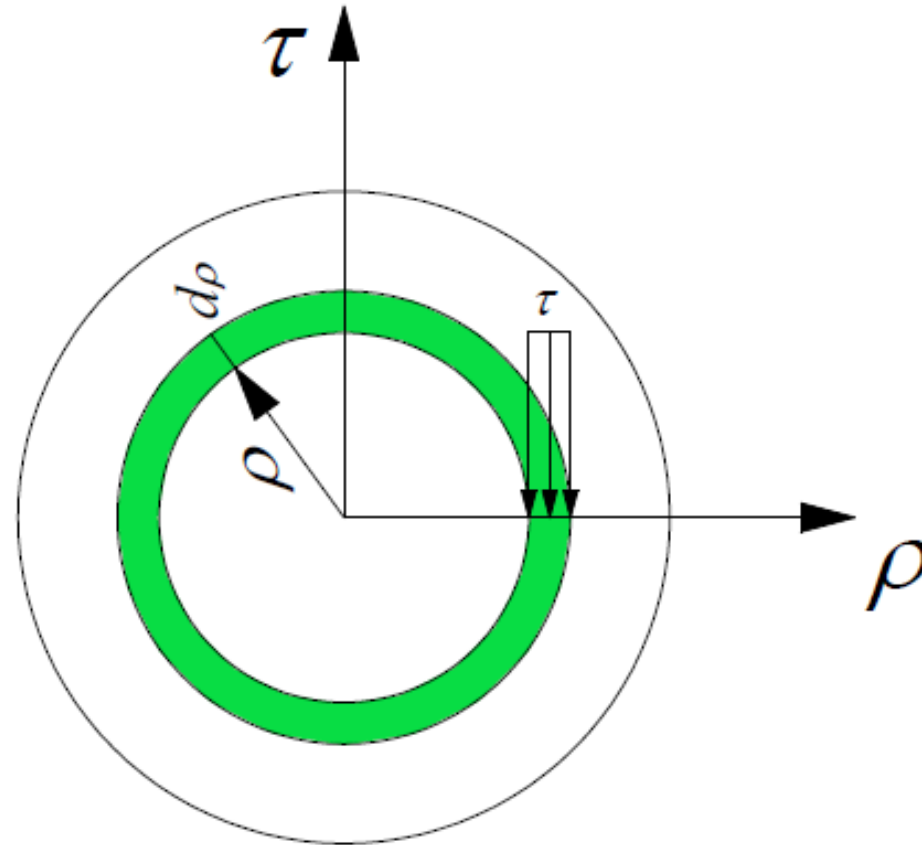

Introduction to Plasticity

□ CIRCULAR SHAFTS MADE OF AN ELASTOPLASTIC MATERIAL

- Considering the idealized case of a solid circular shaft made of an Elastoplastic material.

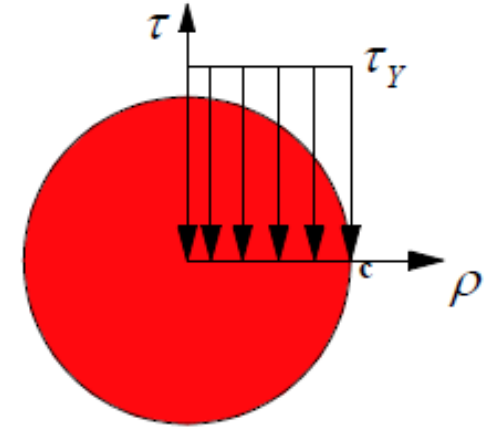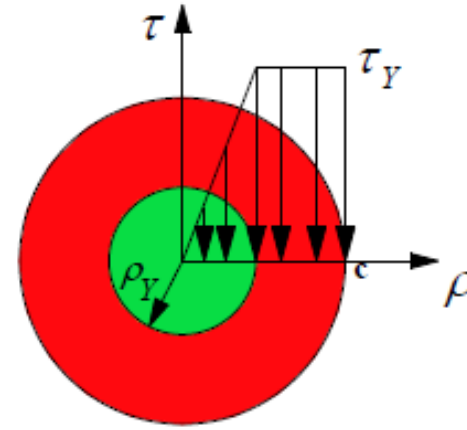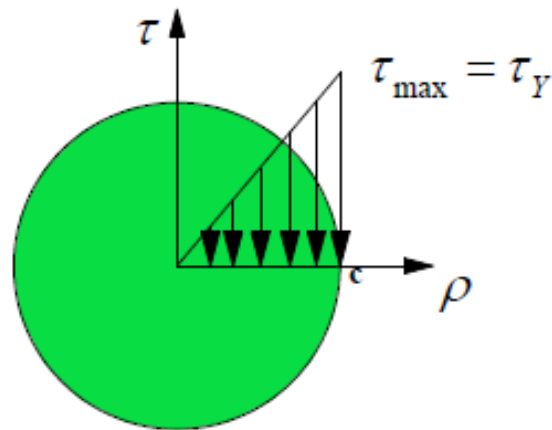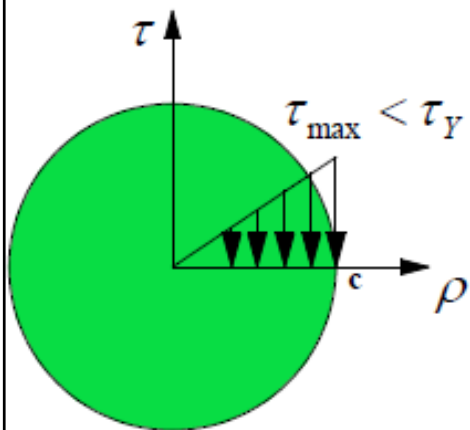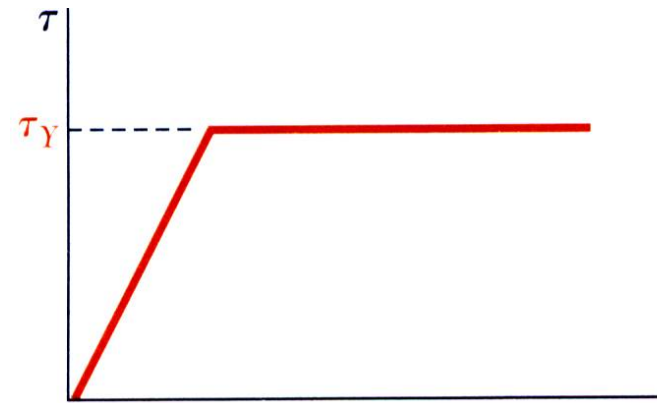

$$\tau_{\max} = \frac{Tc}{J}$$

$$\tau_Y = \frac{T_Y c}{J}$$

$$T_Y = \frac{J}{c} \tau_Y = \frac{1}{2} \pi c^3 \tau_Y$$

$$\tau = \frac{\tau_Y}{\rho_Y} \rho$$

$$T_p = \frac{4}{3} T_Y$$

Plastic torque of the shaft

Introduction to Plasticity

□ Plastic Deformations due to torsion

$$T = 2\pi \int_0^c \rho^2 \tau d\rho$$


$$\Rightarrow T = 2\pi \int_0^{\rho_Y} \rho^2 \left(\frac{\tau_Y}{\rho_Y} \rho \right) d\rho + 2\pi \int_{\rho_Y}^c \rho^2 \tau_Y d\rho$$

$$\Rightarrow T = \frac{1}{2} \pi \rho_Y^3 \tau_Y + \frac{2}{3} \pi c^3 \tau_Y - \frac{2}{3} \pi \rho_Y^3 \tau_Y$$

$$\Rightarrow T = \frac{2}{3} \pi c^3 \tau_Y \left(1 - \frac{1}{4} \frac{\rho_Y^3}{c^3} \right)$$

$$\tau = \frac{\tau_Y}{\rho_Y} \rho$$

$$\Rightarrow T = \frac{4}{3} T_Y \left(1 - \frac{1}{4} \frac{\rho_Y^3}{c^3} \right)$$

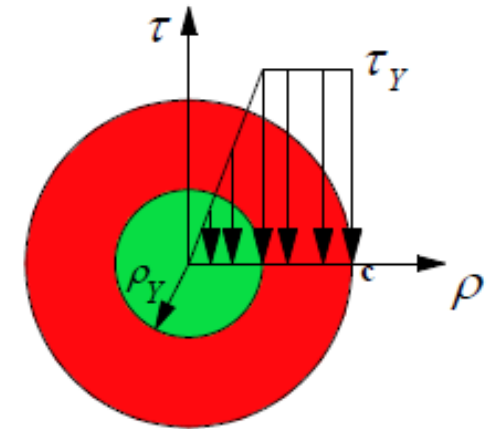

$$\tau = \frac{\tau_Y}{\rho_Y} \rho$$

If $\rho_Y \rightarrow 0$


$$\Rightarrow T_p = \frac{4}{3} T_Y$$

Plastic torque of the shaft

Introduction to Plasticity

□ Plastic Deformations due to torsion

Stress distribution is linear then hooks law is justified

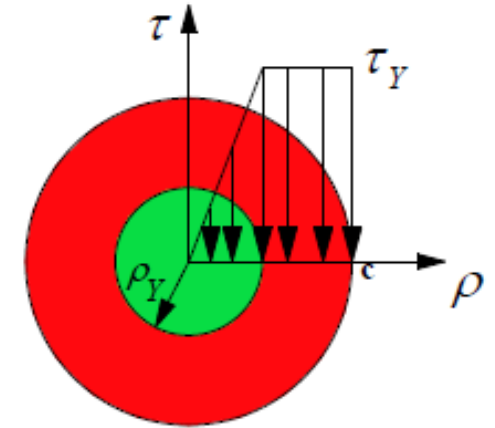

$$\rho_Y = \frac{L\gamma_Y}{\phi}$$

The angle of twist at onset of yield

$$\rho_Y = c$$
$$\phi = \phi_Y$$

$$\Rightarrow c = \frac{L\gamma_Y}{\phi_Y} \Rightarrow \frac{\rho_Y}{c} = \frac{\phi_Y}{\phi}$$

$$T = \frac{4}{3} T_Y \left(1 - \frac{1}{4} \frac{\rho_Y^3}{c^3} \right)$$

$$\Rightarrow T = \frac{4}{3} T_Y \left(1 - \frac{1}{4} \frac{\phi_Y^3}{\phi^3} \right)$$


$$\tau = \frac{\tau_Y}{\rho_Y} \rho$$

Introduction to Plasticity

□ Plastic Deformations due to torsion


$$T = \frac{4}{3} T_Y \left(1 - \frac{1}{4} \frac{\phi_Y^3}{\phi^3} \right)$$

- As $\phi \rightarrow \infty$, the torque approaches a limiting value, $T_P = \frac{4}{3} T_Y = \textit{plastic torque}$

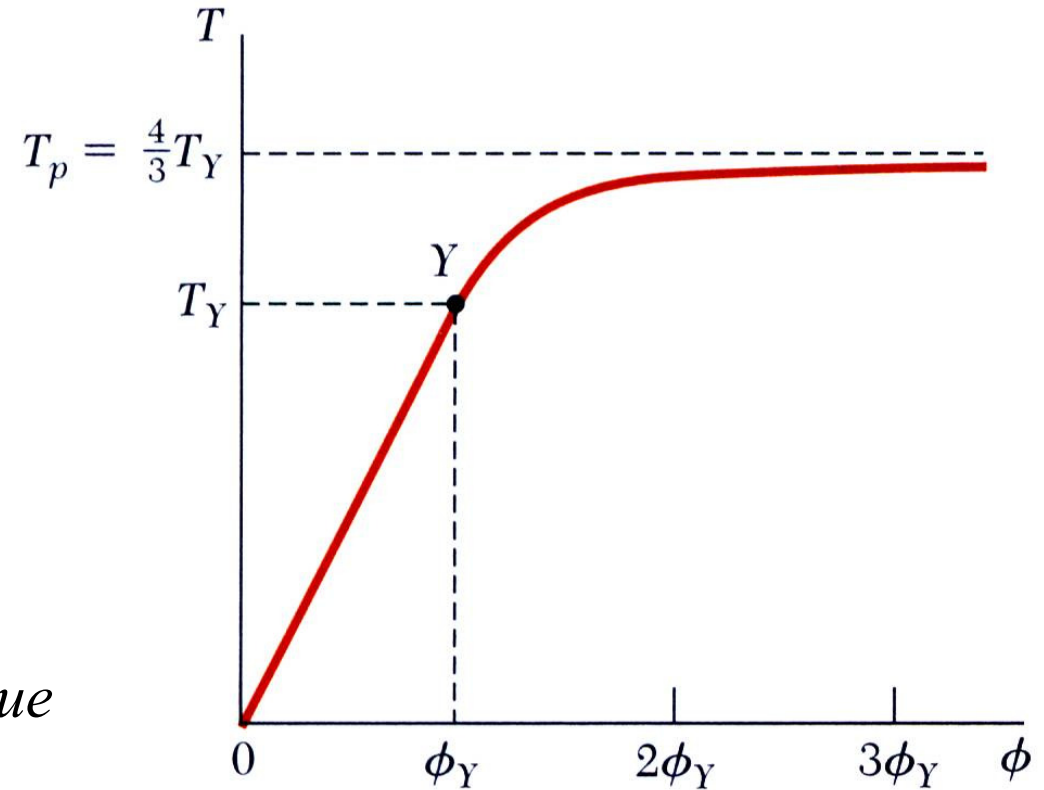


Introduction to Plasticity

□ Plastic Deformations due to torsion

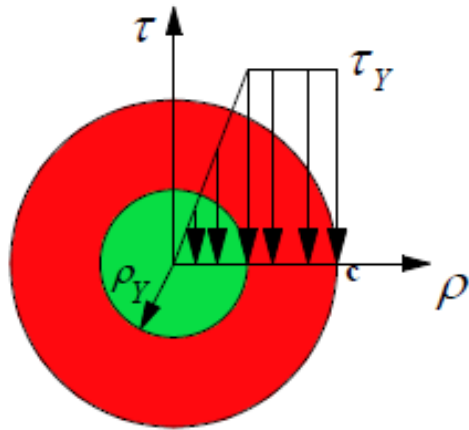



- Plastic region develops in a shaft when subjected to a large enough torque
- When the torque is removed, the reduction of stress and strain at each point takes place along a straight line to a generally non-zero residual stress

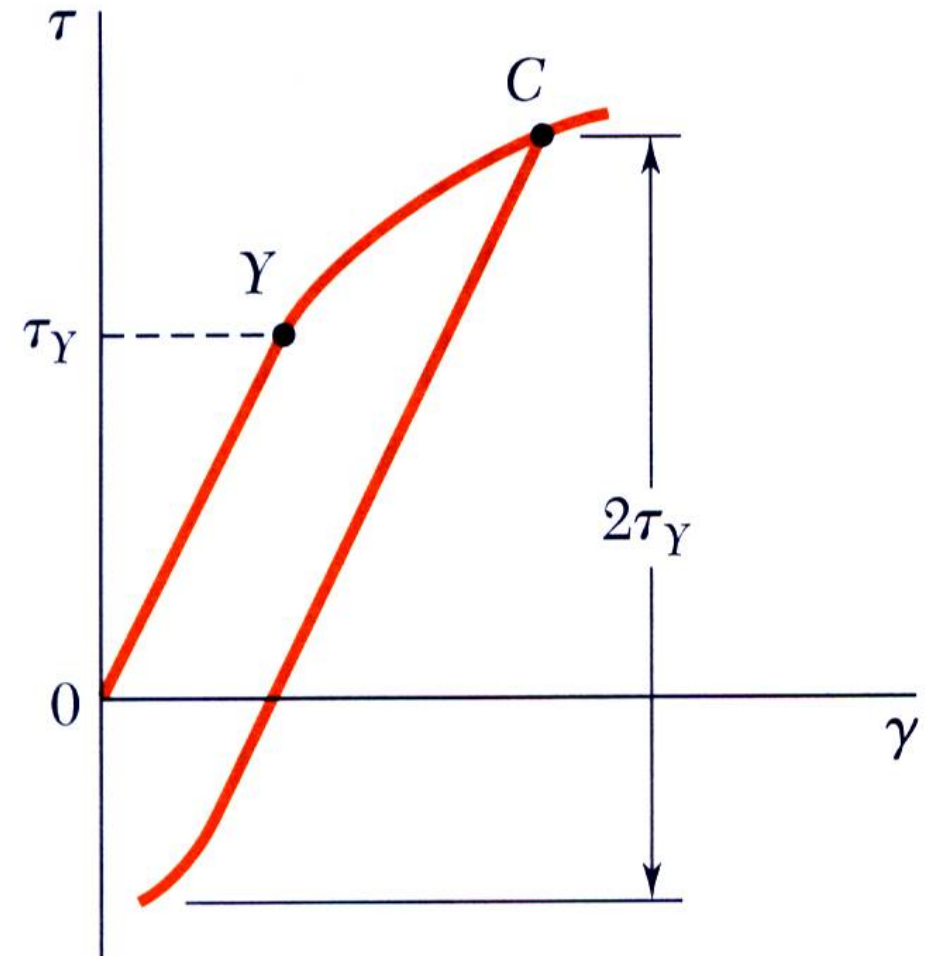

Introduction to Plasticity

□ Plastic Deformations due to torsion

- On a $T-\phi$ curve, the shaft unloads along a straight line to an angle greater than zero
- Residual stresses found from principle of superposition

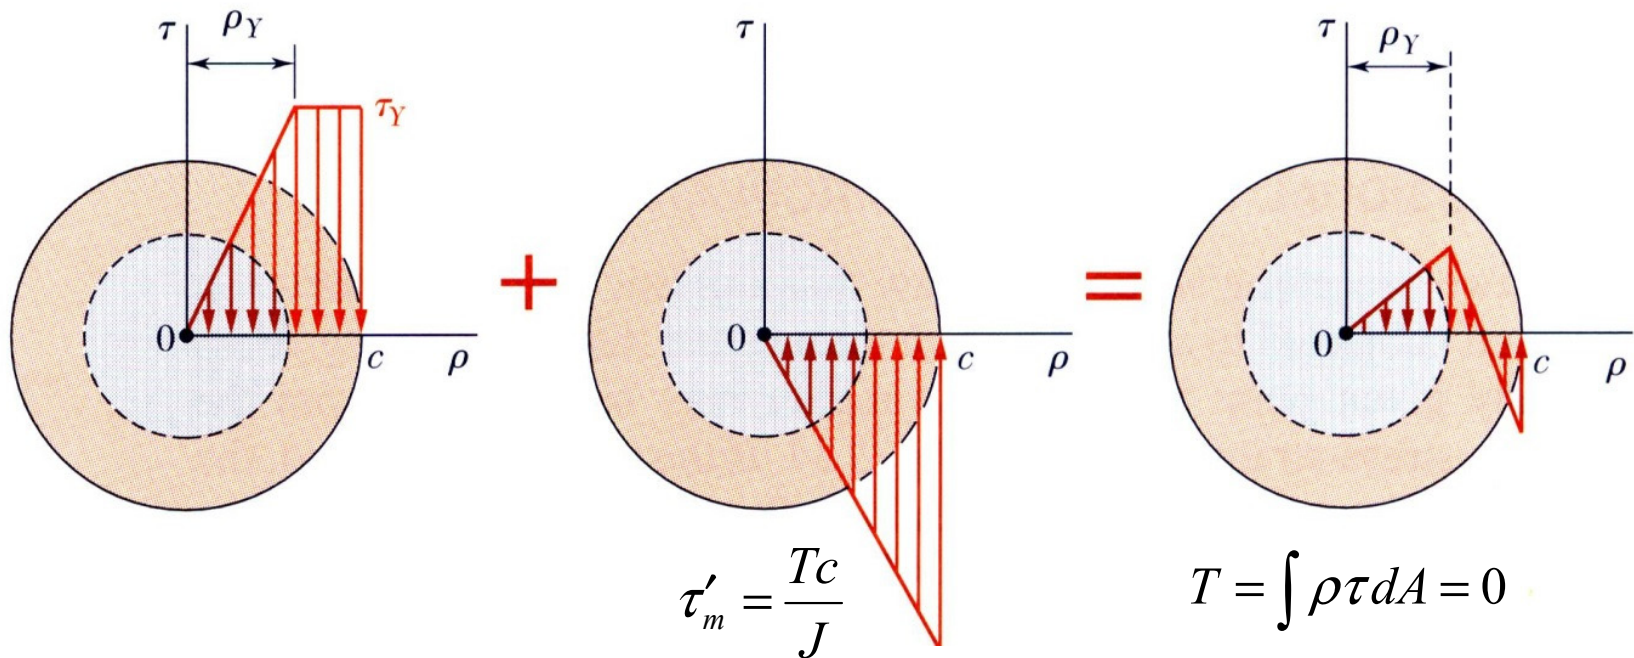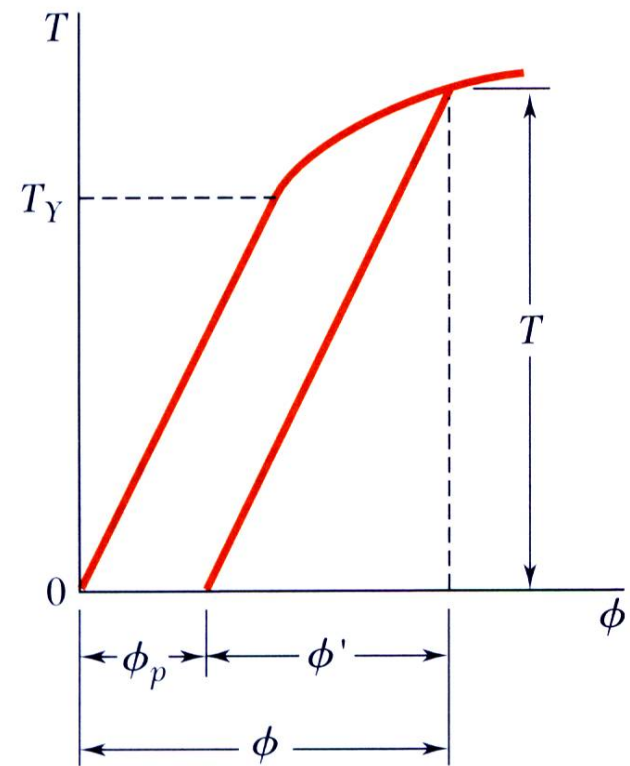


Introduction to Plasticity

Example 06

A solid circular shaft is subjected to a torque $T = 4.6 \text{ kN} \cdot \text{m}$ at each end.


Assuming that the shaft is made of an elastoplastic material with $\tau_Y = 150 \text{ MPa}$ and $G = 77 \text{ GPa}$ determine (a) the radius of the elastic core, (b) the angle of twist of the shaft.

When the torque is removed, determine (c) the permanent twist, (d) the distribution of residual stresses.

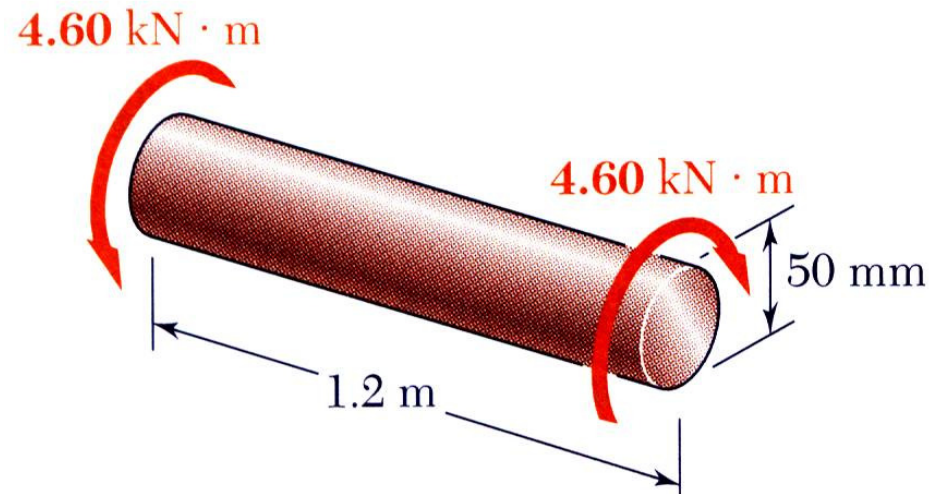

Introduction to Plasticity

Example 06

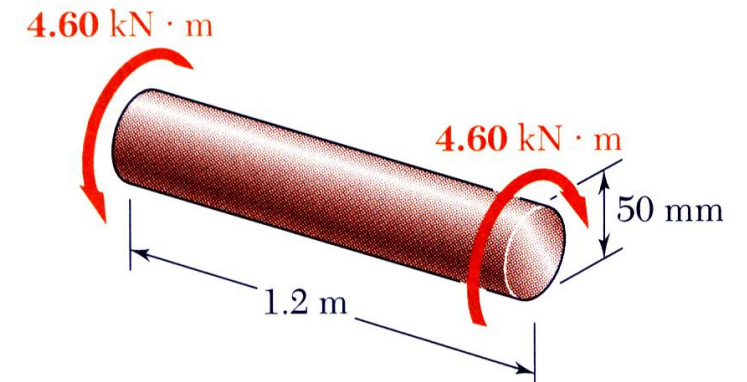


The radius of the elastic core

Introduction to Plasticity

Example 06


- The angle of twist

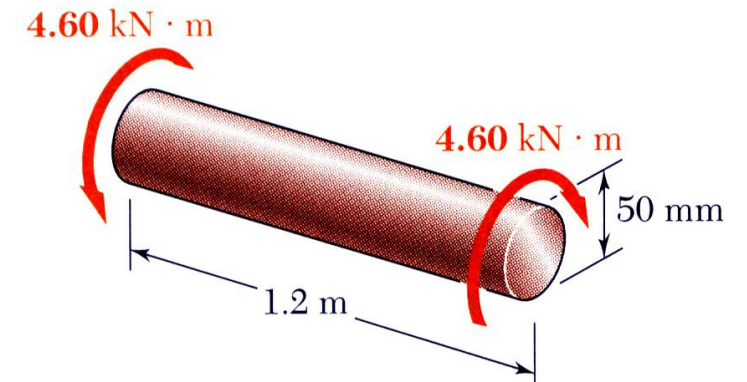

Introduction to Plasticity

Example 06


- The permanent twist is the difference between the angles of twist and untwist

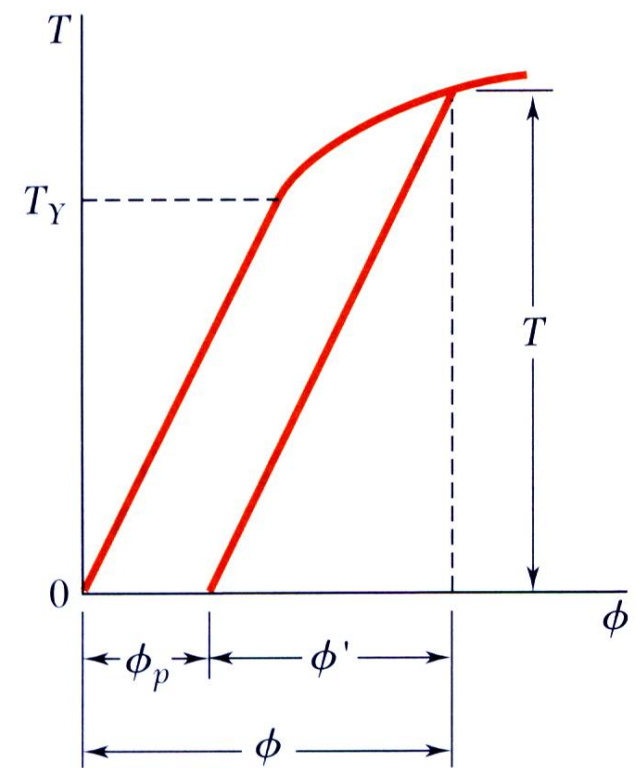

Introduction to Plasticity

Example 06

- Find the residual stress distribution by a superposition of the stress due to twisting and untwisting the shaft

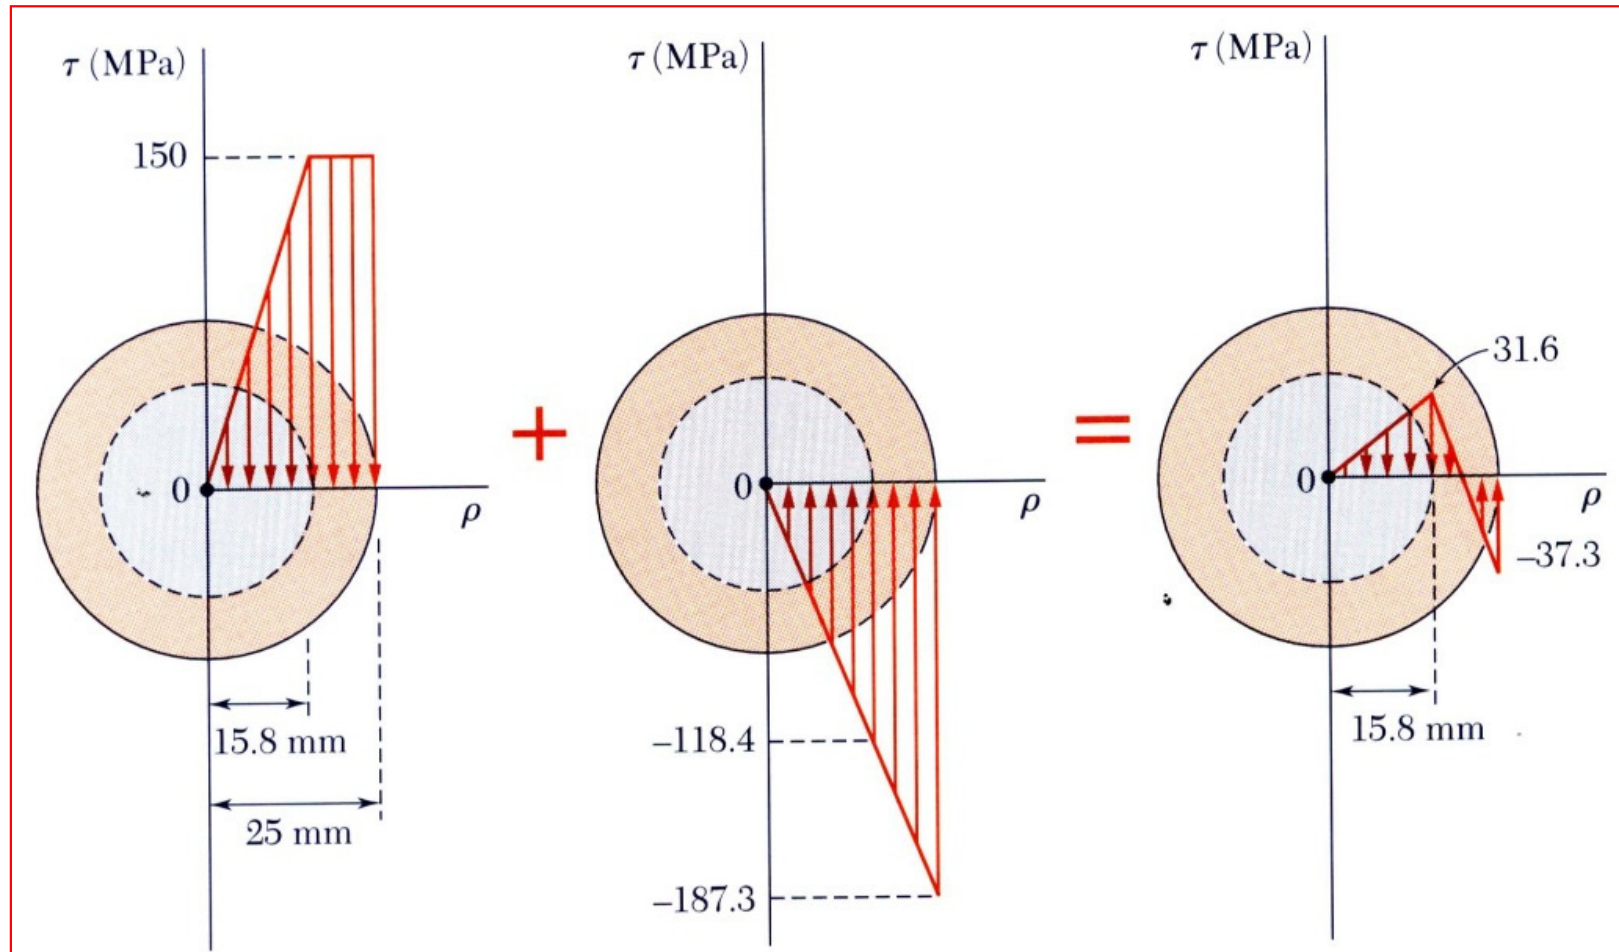


Introduction to Plasticity

Example 07

Shaft AB is made of a mild steel which is assumed to be elastoplastic with $G = 77 \text{ GPa}$ and $\tau_y = 145 \text{ MPa}$. A torque T is applied and gradually increased in magnitude.



Determine the magnitude of T and the corresponding angle of twist (a) when yield first occurs, (b) when the deformation has become fully plastic. (C) the residual stresses and the permanent angle of twist after the torque $T_p = 5.32 \text{ kN}\cdot\text{m}$ has been removed.

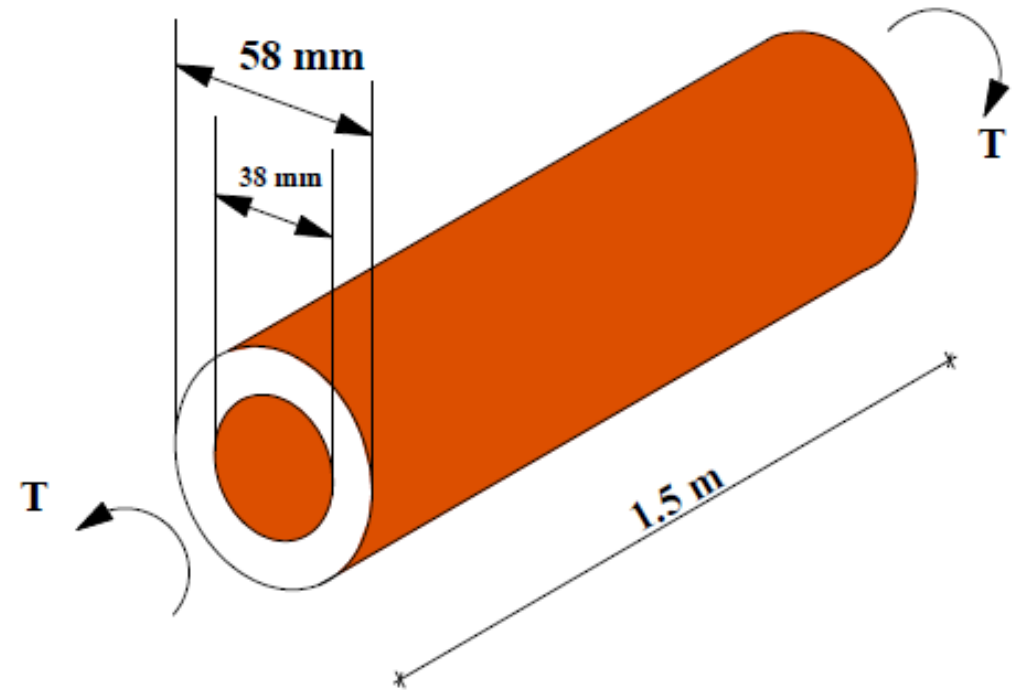

Introduction to Plasticity

Example 07


The geometric properties of the cross section are

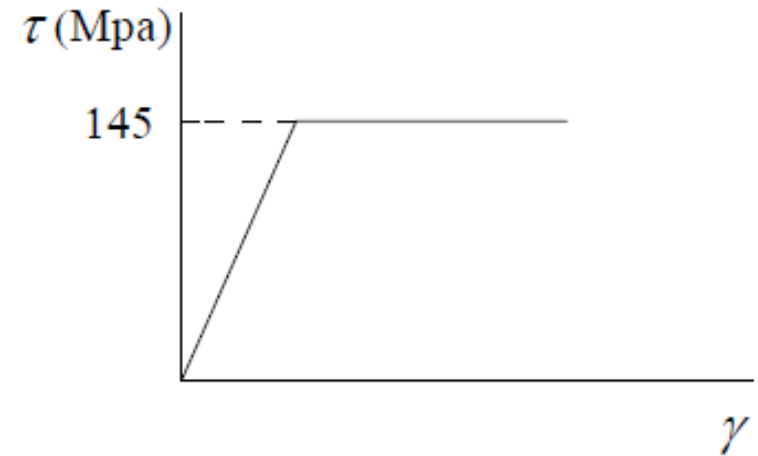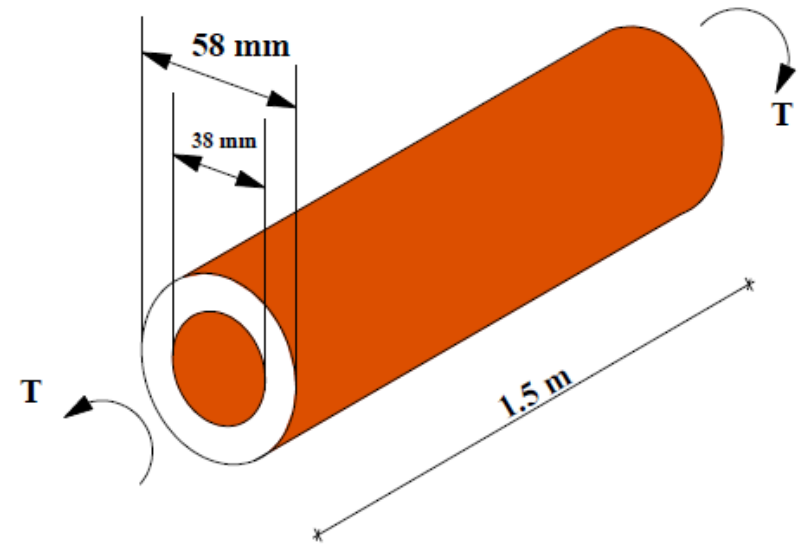

Introduction to Plasticity

Example 07

Onset of Yield

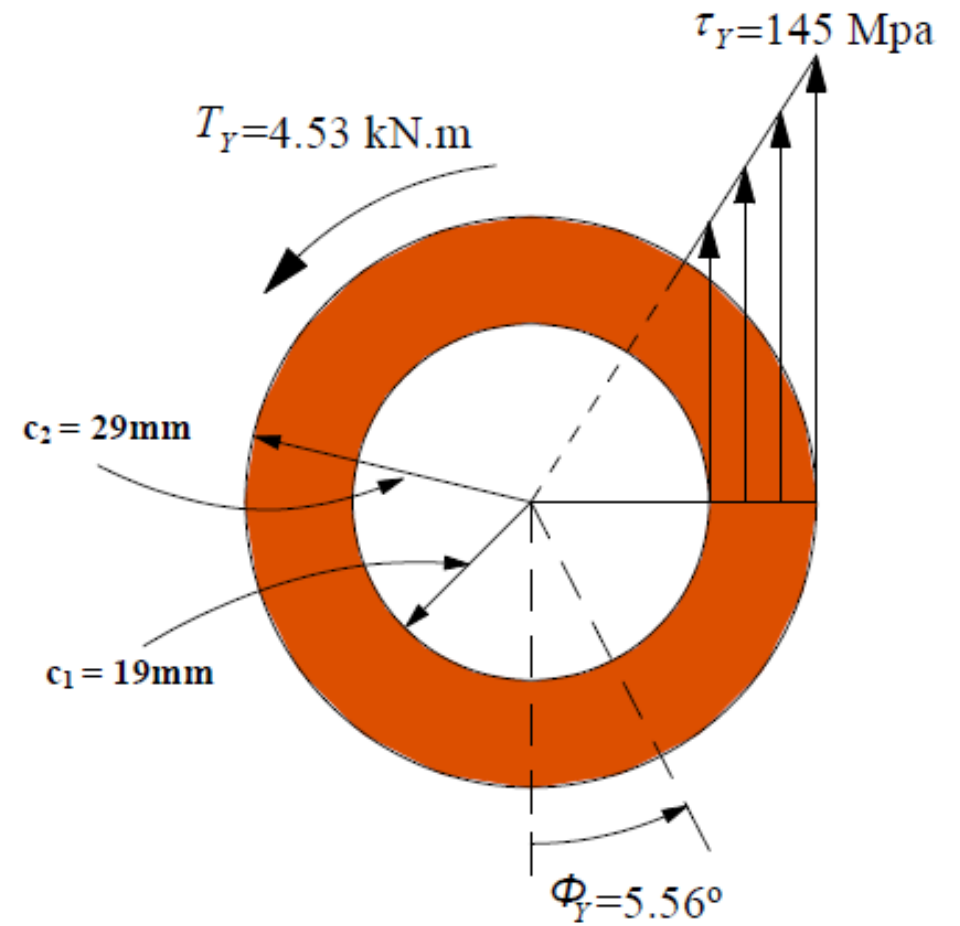


Introduction to Plasticity

Example 07


Fully Plastic Deformation

When yield first occurs on the inner surface, the deformation is fully plastic

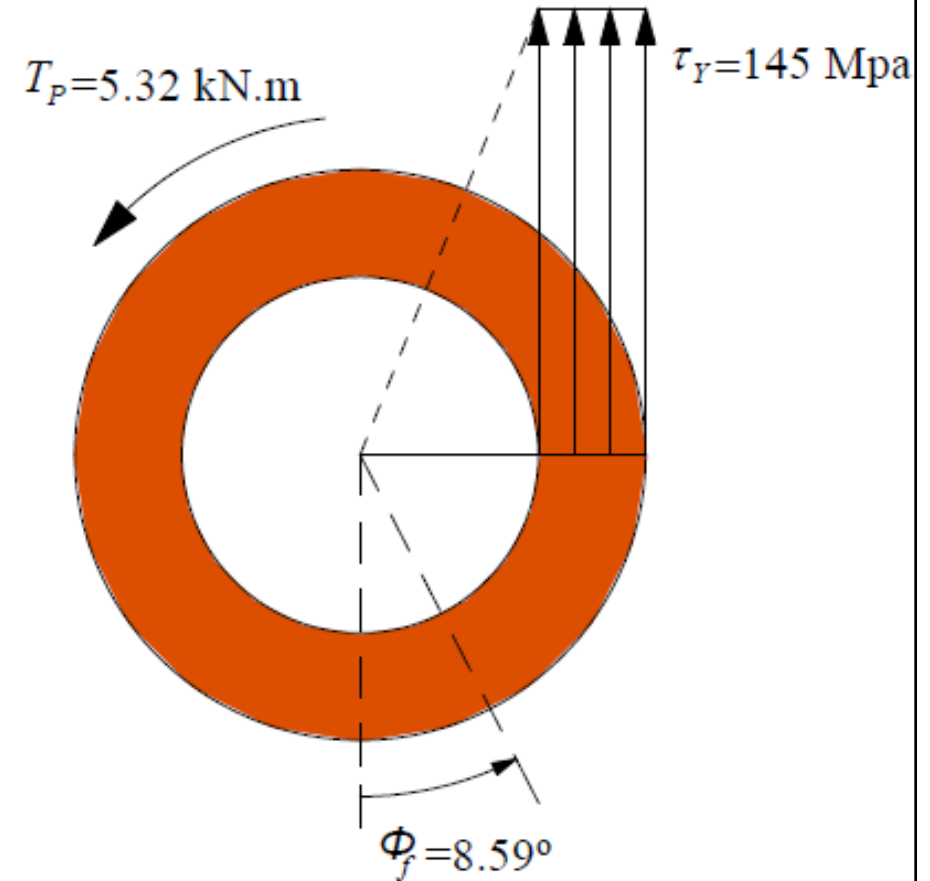


Introduction to Plasticity

Example 07

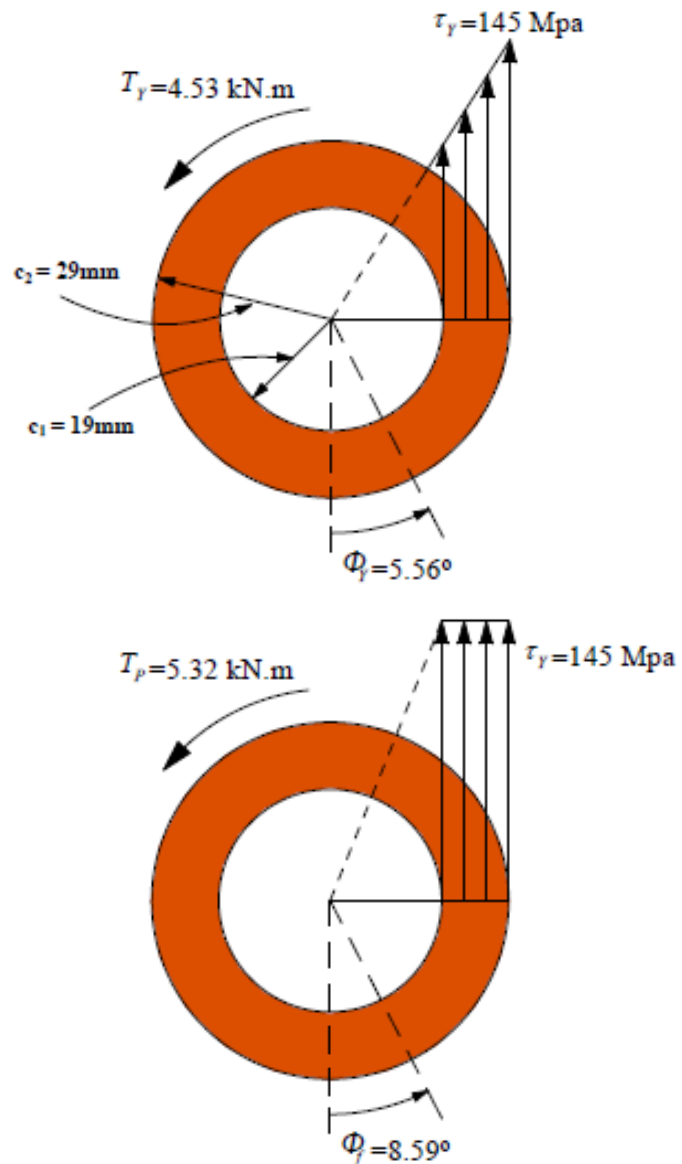

For larger angles of twist, the torque remains constant; the $T-\phi$ diagram of the shaft is as shown.

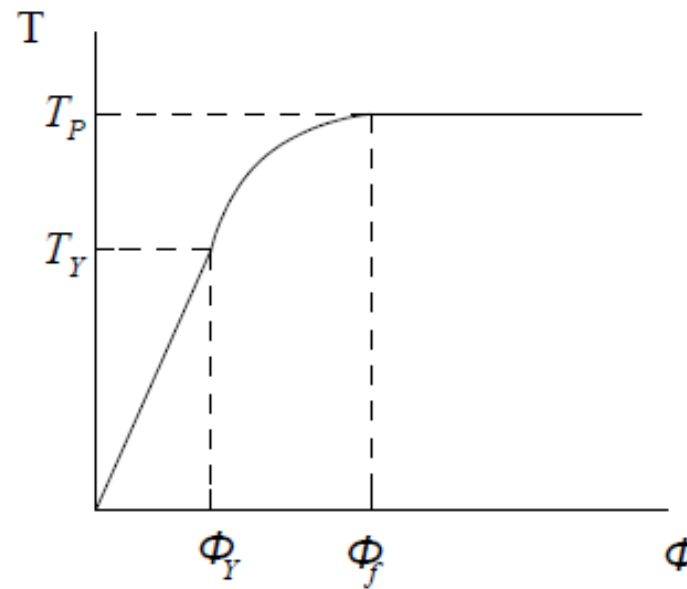

Introduction to Plasticity

Example 07

Elastic Unloading. We unload the shaft by applying a 5.32 kN.m torque in the sense shown in Fig. 2. During this unloading, *the behavior of the material is linear*.

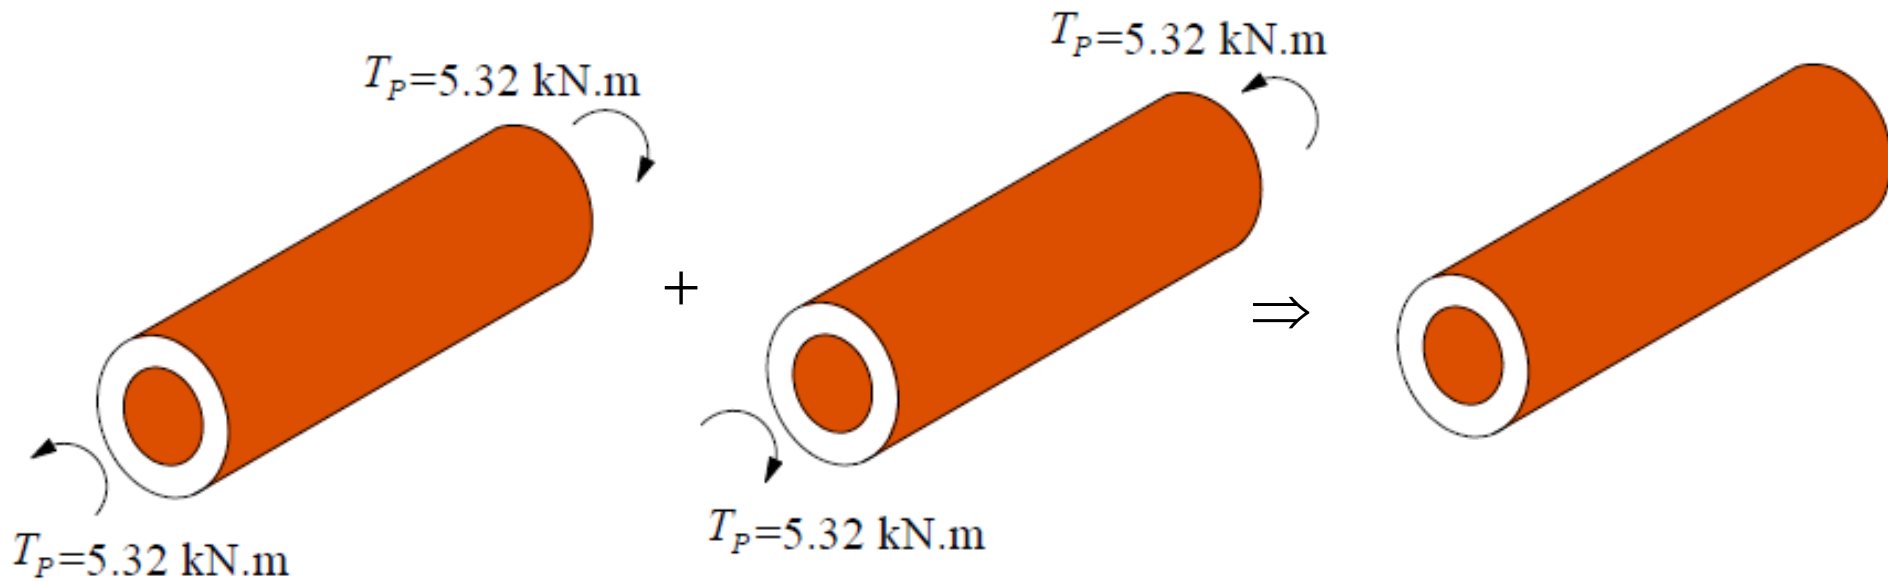


Fig. 1

Fig. 2

Fig. 3

Introduction to Plasticity

Example 07

Elastic Unloading. We unload the shaft by applying a 5.32 kN.m torque in the sense shown in Fig. 2. During this unloading, *the behavior of the material is linear.*

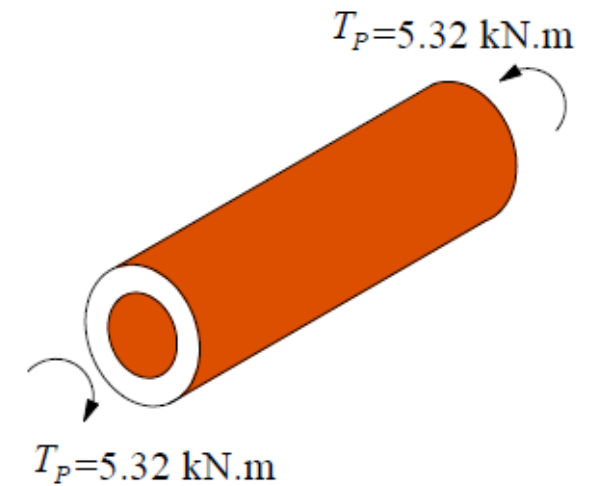



Fig. 2

Introduction to Plasticity

Example 07

Residual Stresses and Permanent Twist.

The results of the loading (Fig. 1) and the unloading (Fig. 2) are superposed (Fig. 3) to obtain the residual stresses and the permanent angle of twist ϕ_p

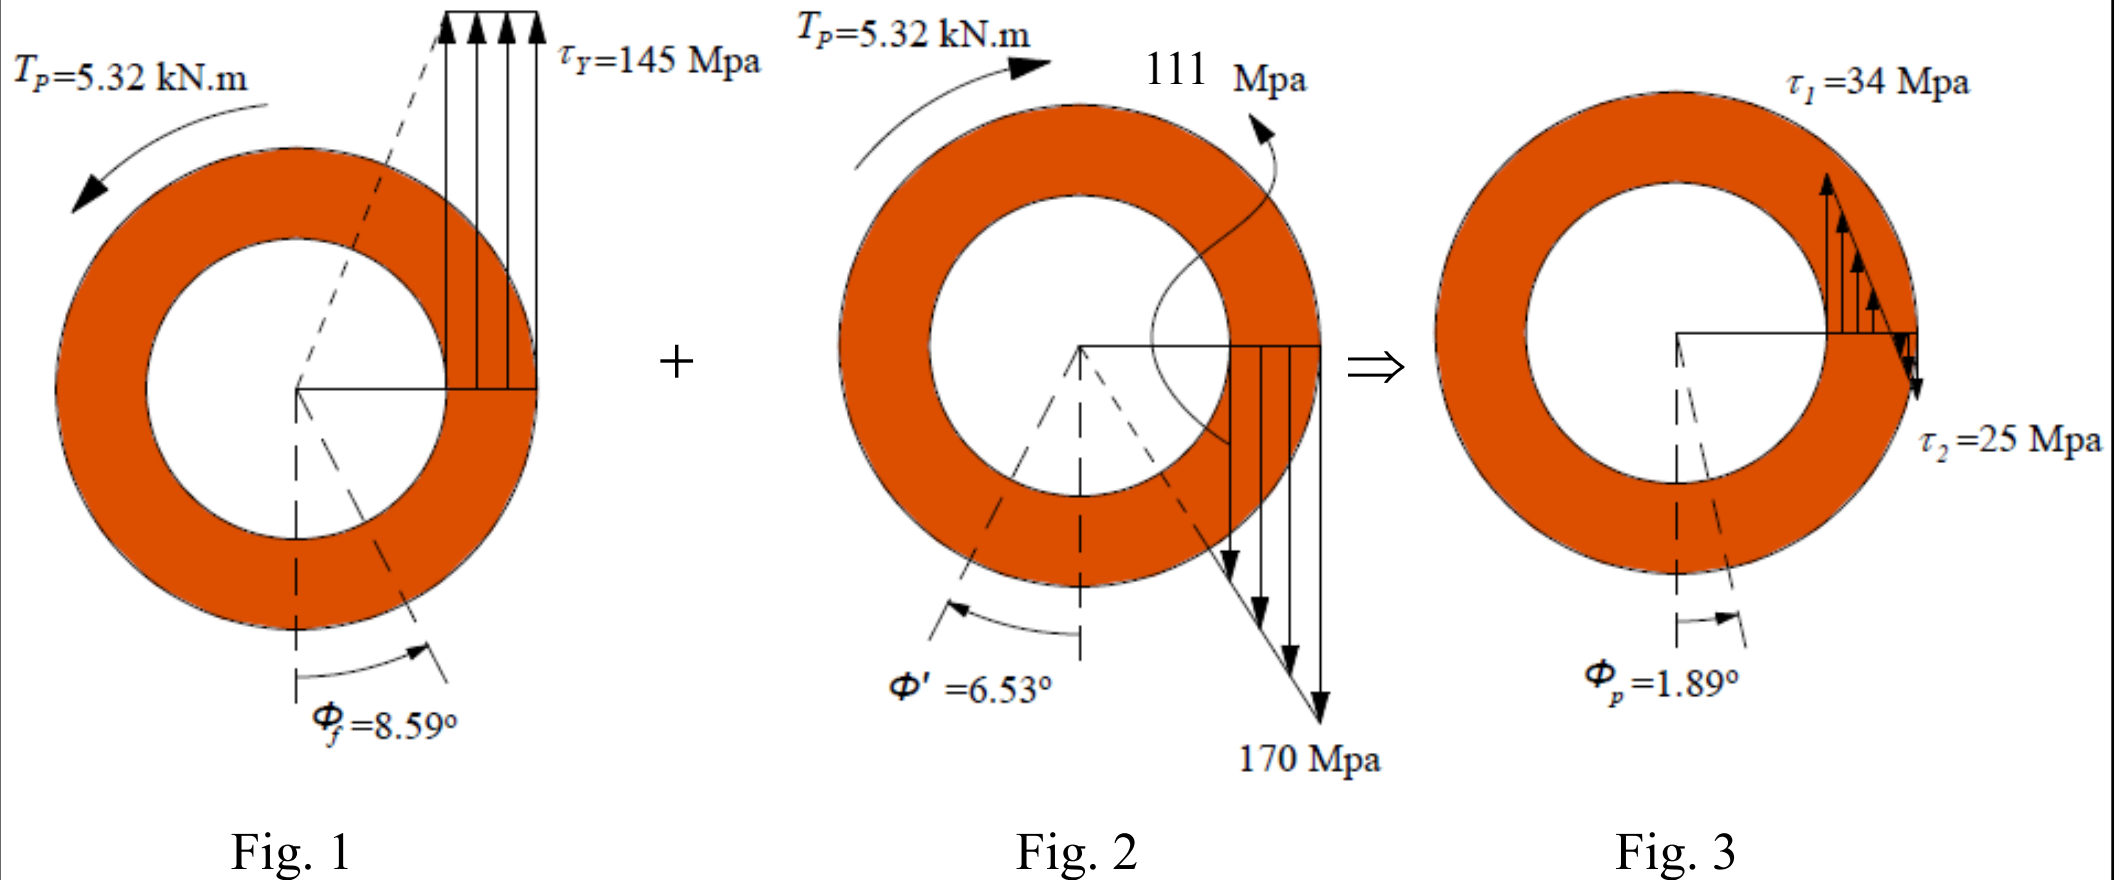


Introduction to Plasticity

□ Plastic Deformations due to pure bending

- For any member subjected to pure bending

strain varies linearly
across the section

$$\epsilon_x = -\frac{y}{c} \epsilon_m$$

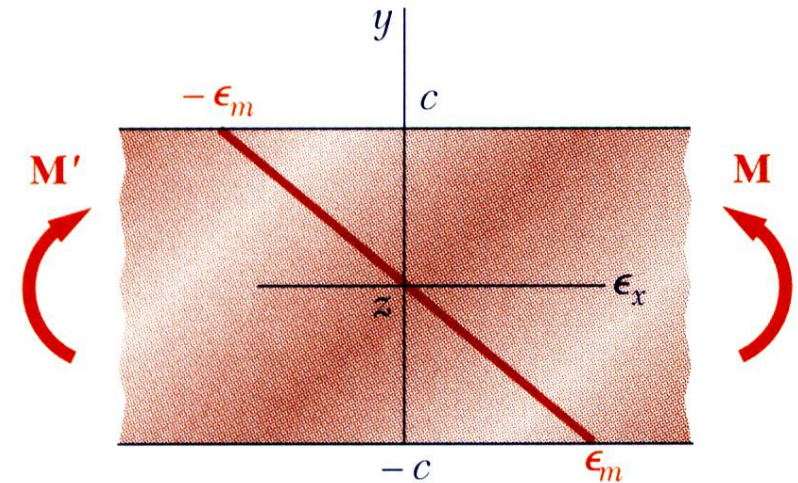


- If the member is made of a **linearly elastic material**, the neutral axis passes through the section centroid and

$$\sigma_x = -\frac{My}{I}$$

Introduction to Plasticity


□ Plastic Deformations due to pure bending

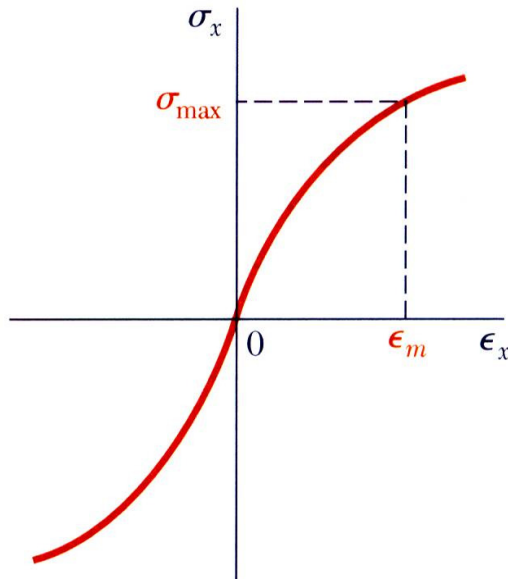

- For a material with a nonlinear stress-strain curve, the neutral axis location is found by satisfying



$$F_x = \int \sigma_x dA = 0 \quad M = \int -y \sigma_x dA$$

- For a member with ***vertical and horizontal planes*** of symmetry and a material with the ***same tensile and compressive stress-strain relationship***, the neutral axis is located at ***the section centroid*** and the stress-strain relationship may be used to map the strain distribution from the stress distribution.

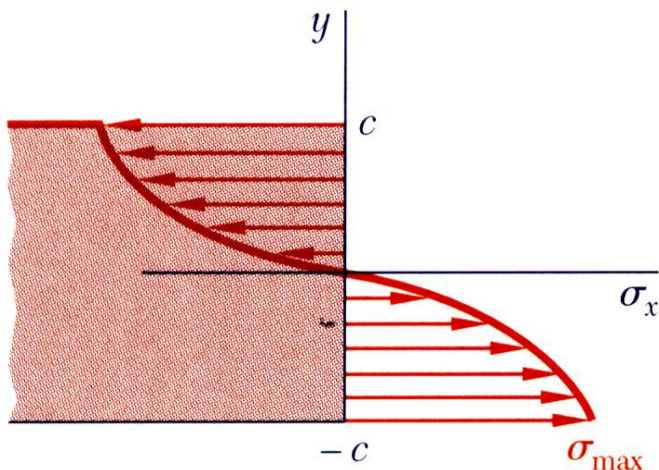

Introduction to Plasticity

□ Plastic Deformations due to pure bending

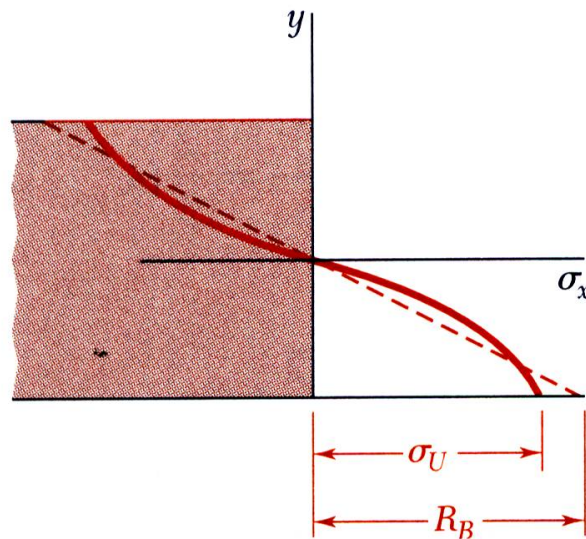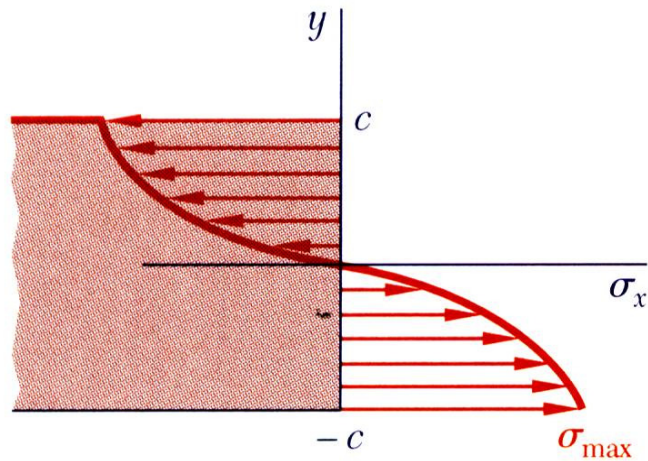

- When the maximum stress is equal to the ultimate strength of the material, failure occurs and the corresponding moment M_U is referred to as the ***ultimate bending moment***.
- The ***modulus of rupture in bending***, R_B , is found from an experimentally determined value of M_U and a fictitious linear stress distribution.

$$R_B = \frac{M_U c}{I}$$

- R_B may be used to determine M_U of any member made of the same material and with the same cross sectional shape but different dimensions.

Introduction to Plasticity

□ Plastic Deformations due to pure bending

- Rectangular beam made of an Elastoplastic material


$$\sigma_x \leq \sigma_Y$$

$$\sigma_m = \frac{Mc}{I} = \sigma_Y$$

$$M_Y = \frac{I}{c} \sigma_Y = \frac{1}{12} \frac{b(2c)^3}{c} \sigma_Y$$

$$\Rightarrow M_Y = \frac{2}{3} bc^3 \sigma_Y$$

Maximum Elastic Moment

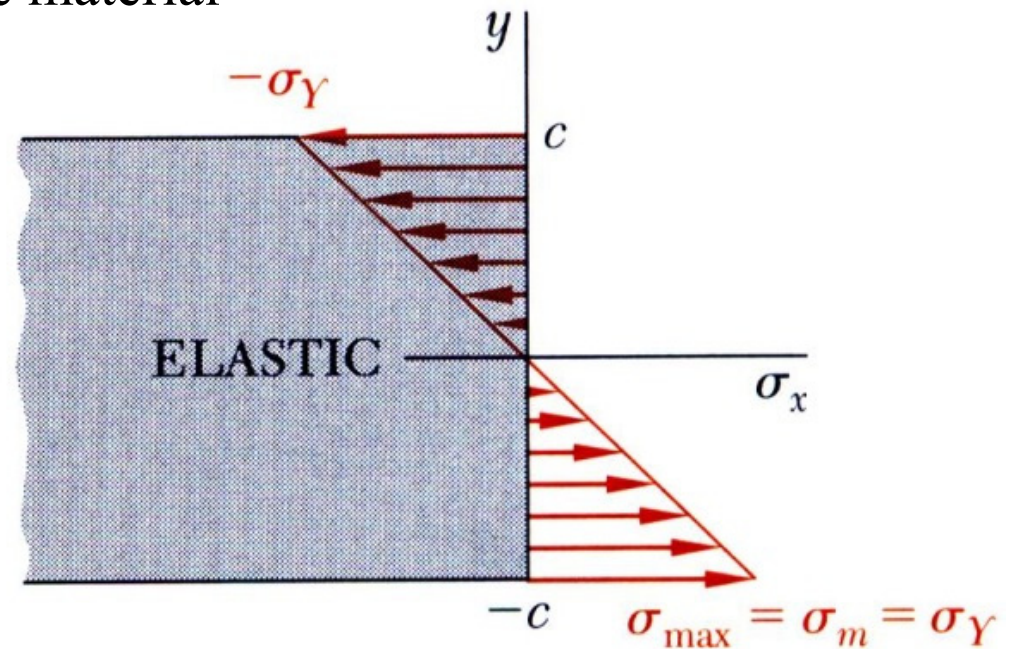

(b) $M = M_Y$

Introduction to Plasticity


□ Plastic Deformations due to pure bending

- If the moment is increased beyond the maximum elastic moment, **plastic zones develop around an elastic core**.

y_Y = elastic core half - thickness

$$0 \leq y \leq y_Y \Rightarrow \sigma_x = -\frac{y}{y_Y} \sigma_Y$$

$$y_Y \leq y \leq c \Rightarrow \sigma_x = -\sigma_Y$$

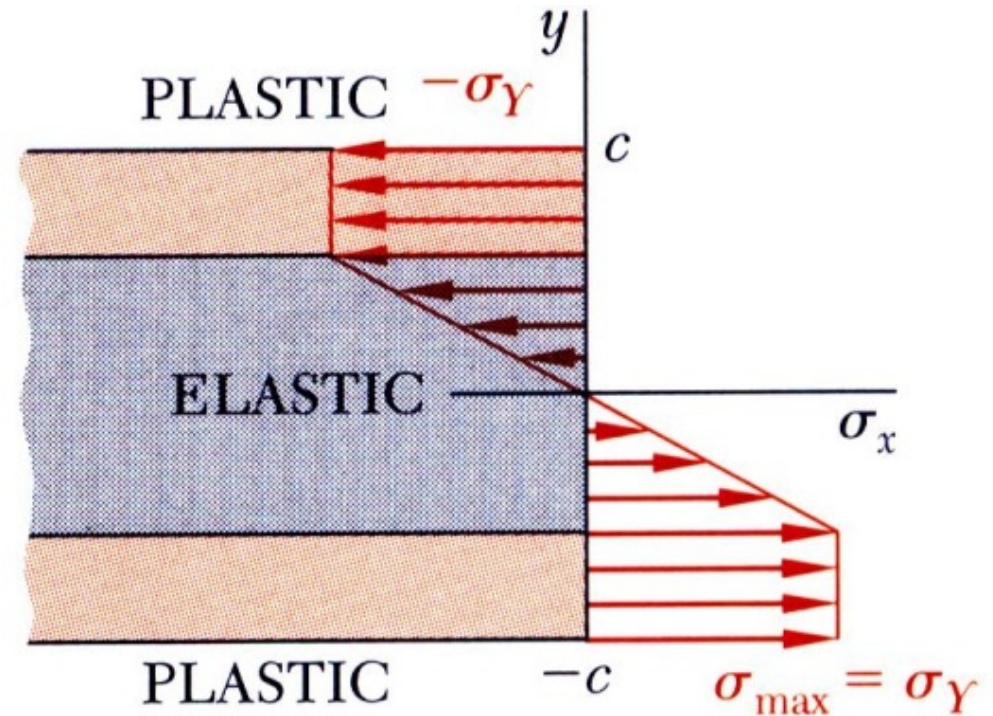


(c) $M > M_Y$

Introduction to Plasticity

□ Plastic Deformations due to pure bending

$$M = -\int_{-c}^c y \sigma_x dA = -\int_{-c}^c y \sigma_x (b dy)$$

$$\Rightarrow M = -2b \int_0^c y \sigma_x dy$$

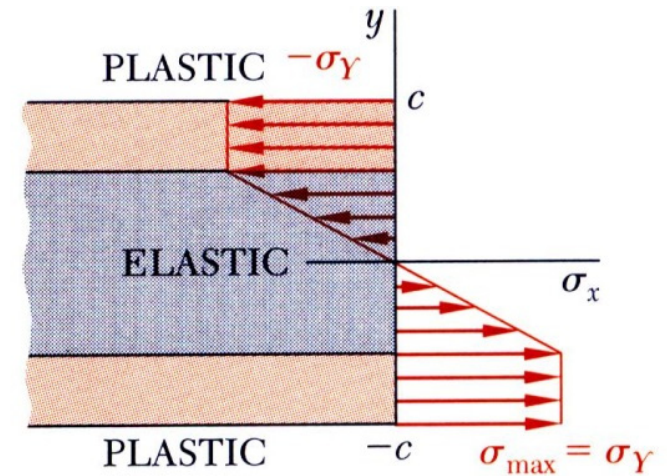

(c) $M > M_Y$

$$M = -2b \int_0^{y_Y} y \left(-\frac{y}{y_Y} \sigma_Y \right) dy - 2b \int_{y_Y}^c y (-\sigma_Y) dy$$

$$M = bc^2 \sigma_Y \left(1 - \frac{1}{3} \frac{y_Y^2}{c^2} \right) \Rightarrow M = \frac{3}{2} M_Y \left(1 - \frac{1}{3} \frac{y_Y^2}{c^2} \right)$$

$$y_Y = \varepsilon_Y \rho$$


$$c = \varepsilon_Y \rho_Y$$

$$\Rightarrow \frac{y_Y}{c} = \frac{\rho}{\rho_Y} \Rightarrow M = \frac{3}{2} M_Y \left(1 - \frac{1}{3} \frac{\rho^2}{\rho_Y^2} \right)$$

Introduction to Plasticity

□ Plastic Deformations due to pure bending

- In the limit as the moment is increased further, the elastic core thickness goes to zero, corresponding to **a fully plastic deformation.**

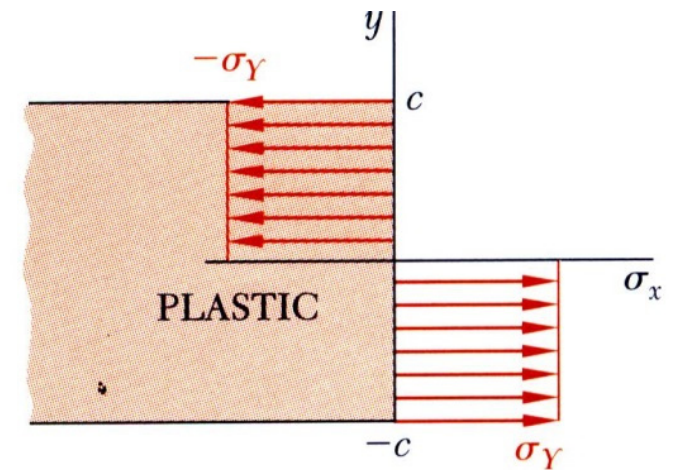

(d) $M = M_p$

$$M_p = \frac{3}{2} M_Y = \text{plastic moment}$$

$$Z = \frac{M_p}{\sigma_Y} \quad S = \frac{M_Y}{\sigma_Y}$$

$$\frac{M_p}{M_Y} = \frac{Z}{S} = k$$



shape factor (depends only on cross section shape)

Z : plastic modulus

“It can also be defined as the first moment of area about the neutral axis when the areas above and below the neutral axis are equal.”

Introduction to Plasticity

□ Plastic Deformations due to pure bending

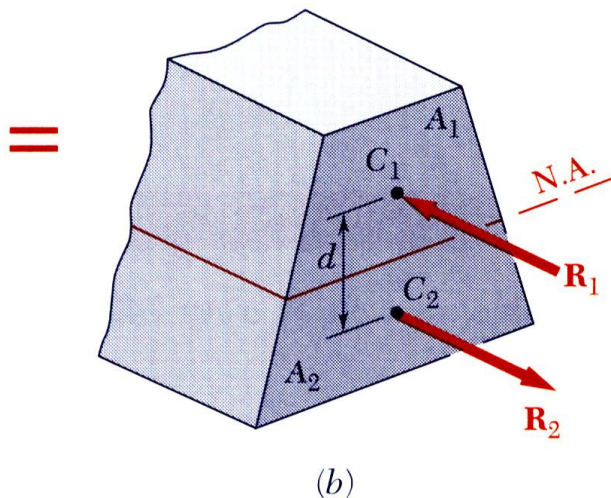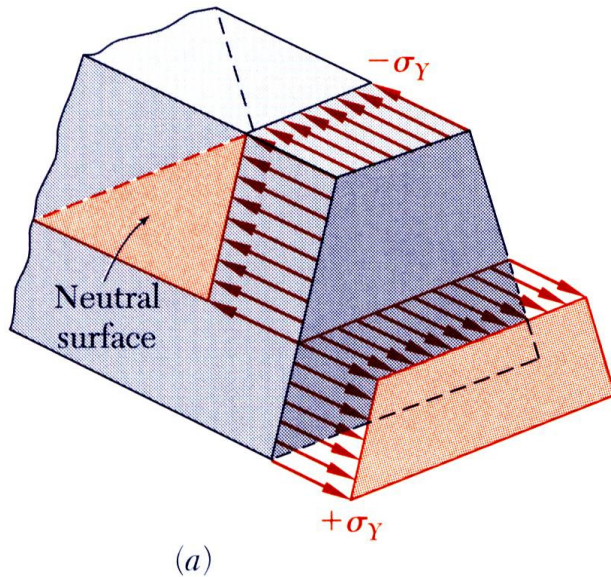

- Fully plastic deformation of a beam with **only a vertical plane of symmetry**.
- The neutral axis cannot be assumed to pass through the section centroid.
- Resultants R_1 and R_2 of the elementary compressive and tensile forces form a couple.

$$R_1 = R_2 \Rightarrow A_1 \sigma_Y = A_2 \sigma_Y \Rightarrow A_1 = A_2$$


The neutral axis divides the section into equal areas.

- The plastic moment for the member,

$$M_p = \left(\frac{1}{2} A \sigma_Y \right) d$$

Introduction to Plasticity

□ Plastic Deformations due to pure bending

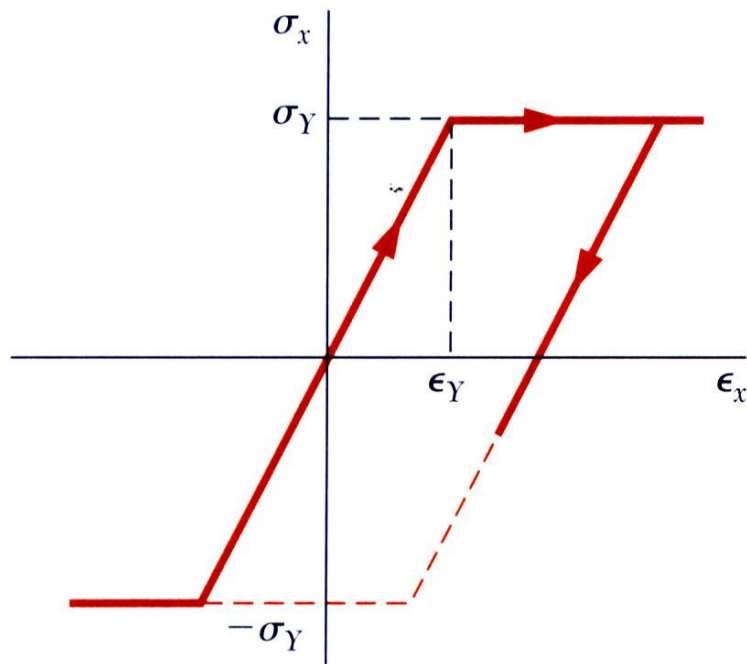

- Plastic zones develop in a member made of an Elastoplastic material if the bending moment is large enough.
- Since the linear relation between normal stress and strain applies at all points during the unloading phase, it may be handled by assuming the member to be fully elastic.
- Residual stresses are obtained by applying the principle of superposition to combine the stresses due to loading with a moment M (elastoplastic deformation) and unloading with a moment $-M$ (elastic deformation).
- The final value of stress at a point will not, in general, be zero.

Introduction to Plasticity

Example 08


A member of uniform rectangular cross section is subjected to a bending moment $M = 36.8$ kN-m. The member is made of an Elastoplastic material with a yield strength of 240 MPa and a modulus of elasticity of 200 GPa.

Determine

- (a) the thickness of the elastic core,
- (b) the radius of curvature of the neutral surface.

After the loading has been reduced back to zero, determine


- (c) the distribution of residual stresses,
- (d) radius of curvature.

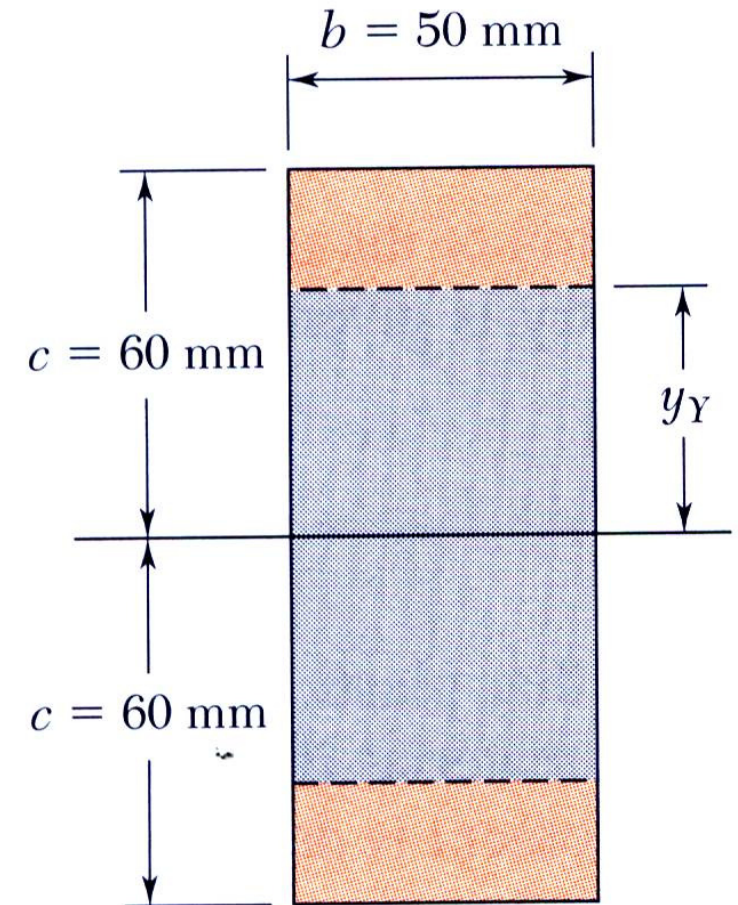

Introduction to Plasticity

Example 08


- Maximum elastic moment:

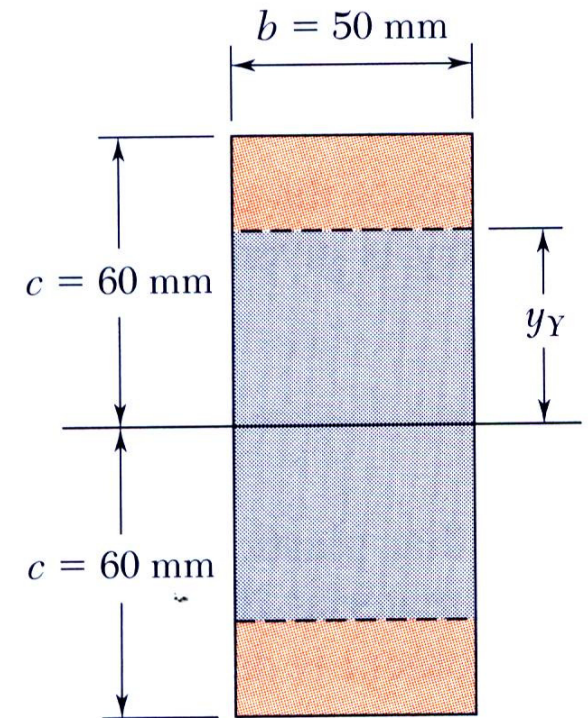

Introduction to Plasticity

Example 08


- Thickness of elastic core:

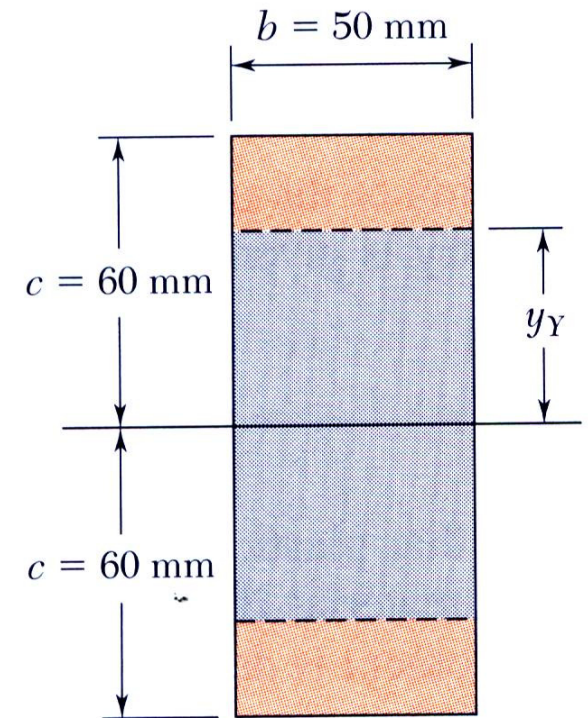

Introduction to Plasticity


Example 08

- Radius of curvature:

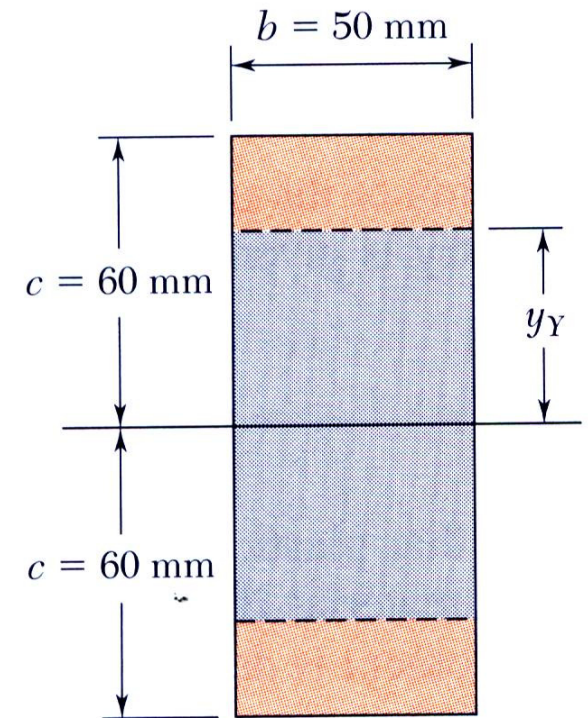


Introduction to Plasticity


Example 08

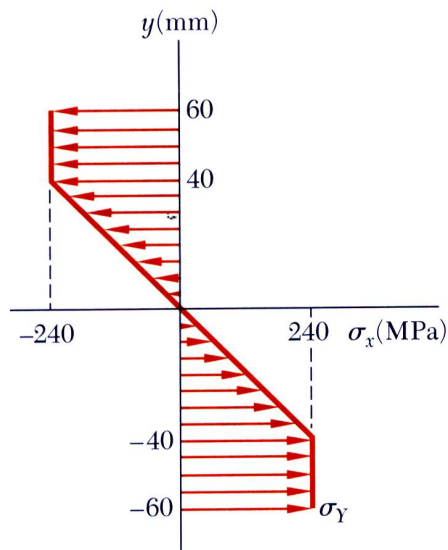


- $M = 36.8$ kN-m

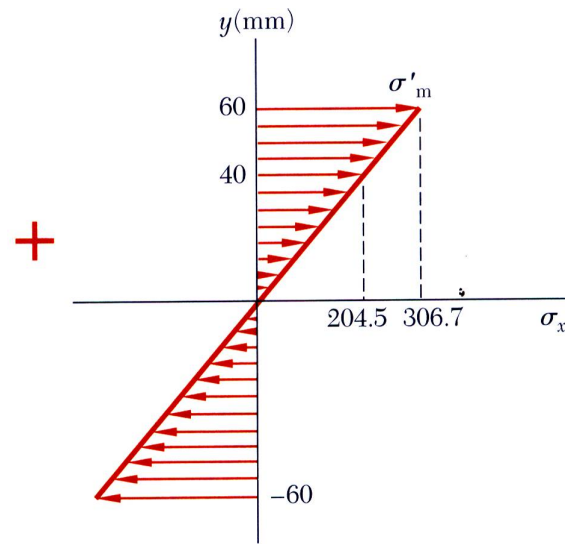

- $M = -36.8$ kN-m

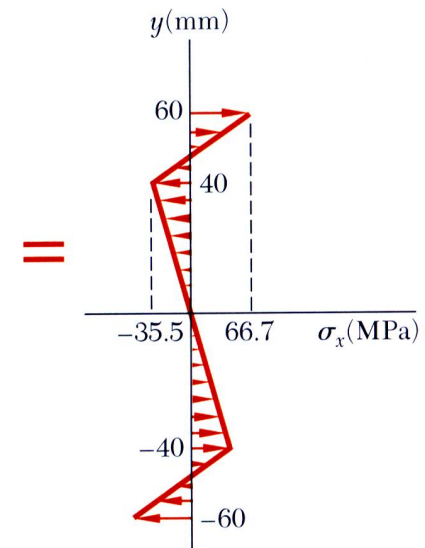


- $M = 0$

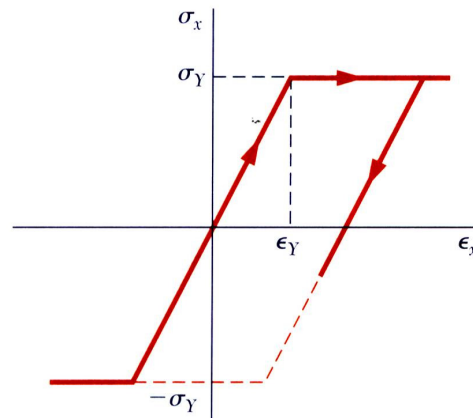

Introduction to Plasticity

Example 09

Beam AB has been fabricated from a high-strength low-alloy steel that is assumed to be Elastoplastic with $E = 200$ GPa and $\sigma_y = 350$ MPa. Neglecting the effect of fillets, determine the bending moment M and the corresponding radius of curvature **(a)** when yield first occurs, **(b)** when the flanges have just become fully plastic. **(c)** determine the residual stresses and the permanent radius of curvature after couple M in part (b) has been removed.

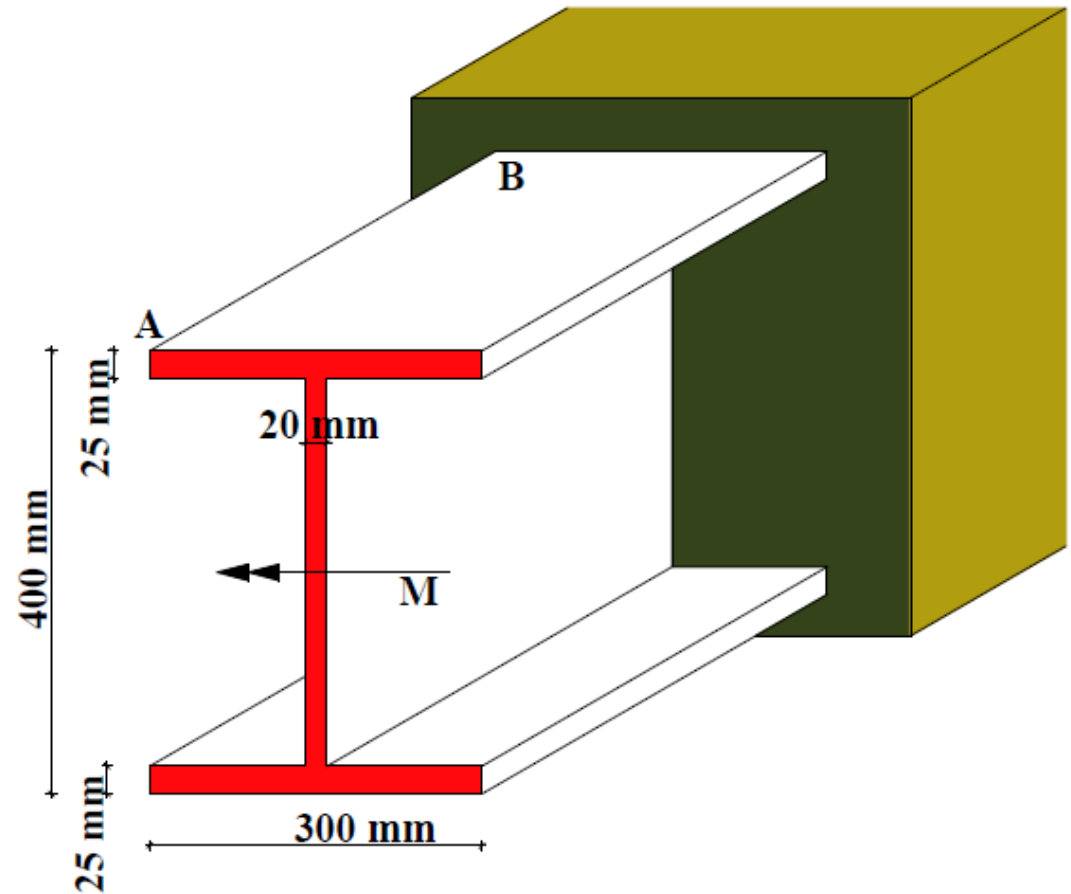


Introduction to Plasticity

Example 09

a. Onset of Yield

The centroidal moment of inertia of the section is

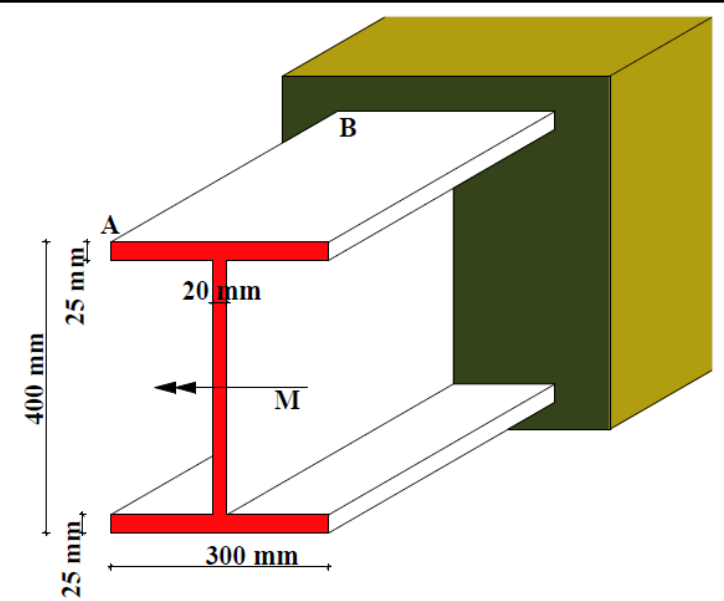



Bending Moment.

Radius of curvature.

Introduction to Plasticity

Example 09

a. Onset of Yield

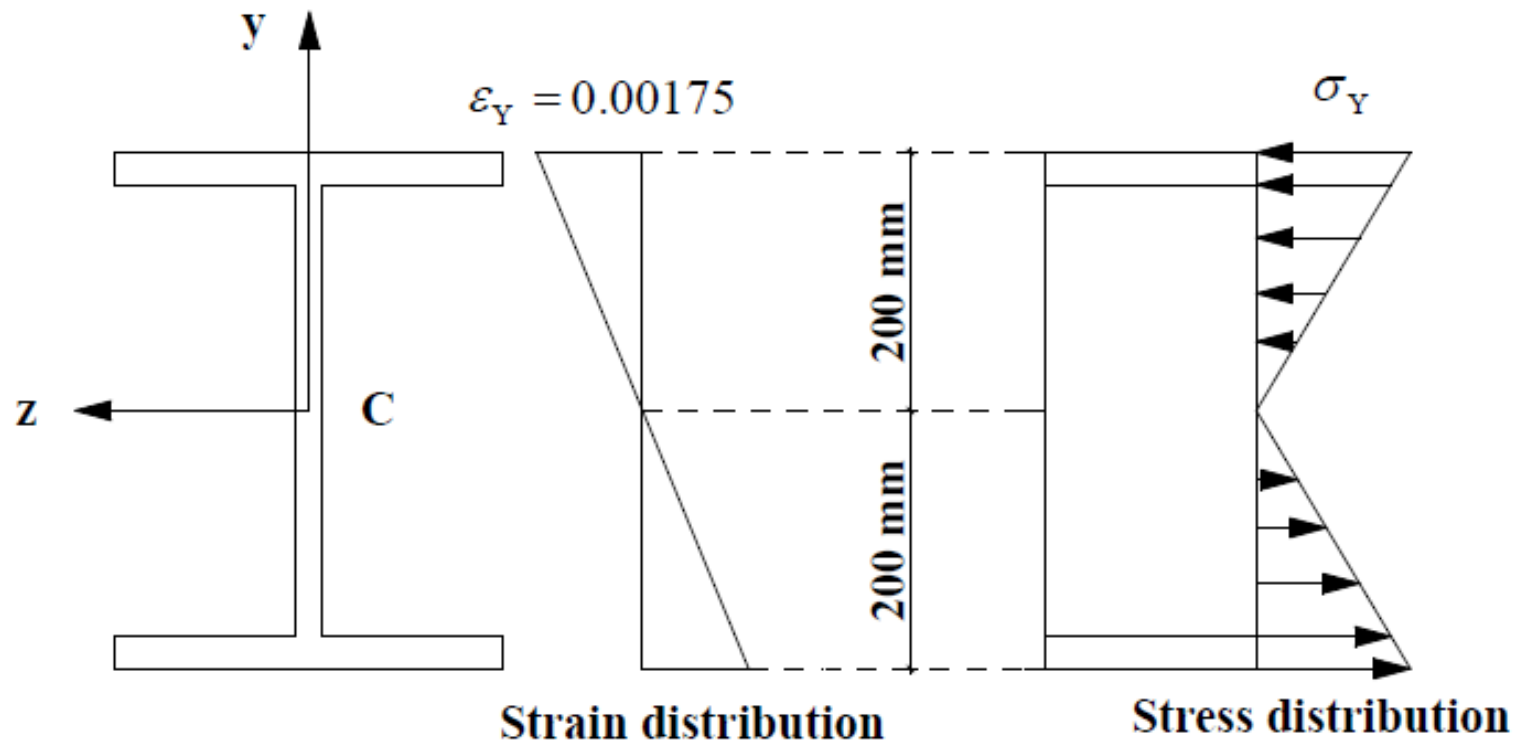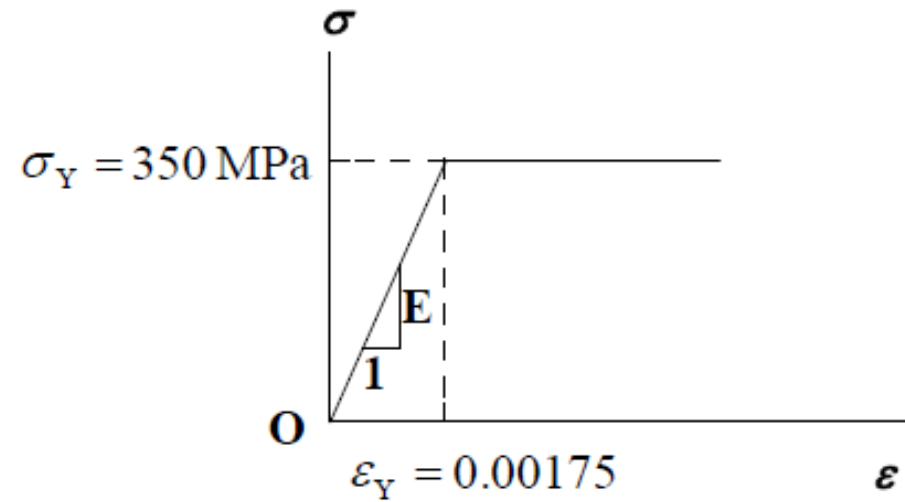


Introduction to Plasticity

Example 09

b. Flanges Fully Plastic


When the flanges have just become fully plastic, the strains and stresses in the section are as shown in the figure below. We replace the elementary compressive forces exerted on the top flange and on the top half of the web by their resultants R_1 and R_2 , and similarly replace the tensile forces by R_3 , and R_4

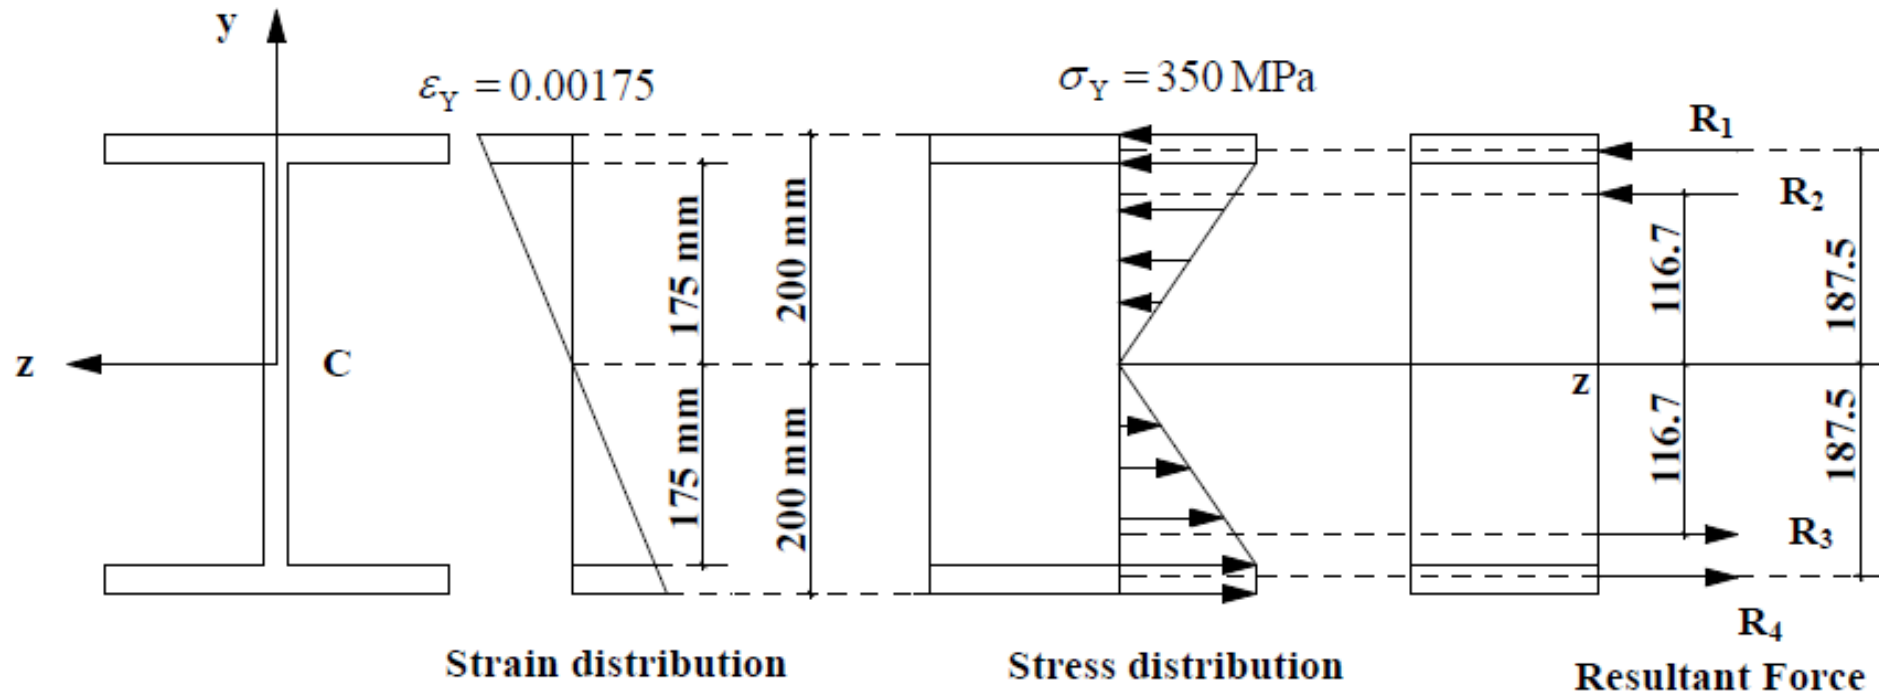

Introduction to Plasticity

Example 09

b. Flanges Fully Plastic

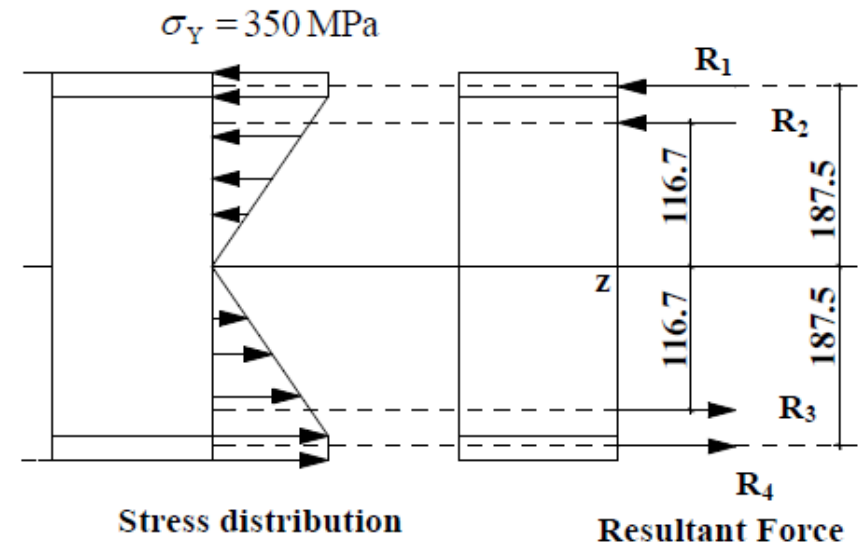

Bending Moment.

Radius of curvature.

Introduction to Plasticity


Example 09

c. Residual stress

Elastic Unloading

The beam is unloaded by the application of a couple of moment $M = -1130 \text{ kN} \cdot \text{m}$ (which is equal and opposite to the couple originally applied).


c. Residual stress

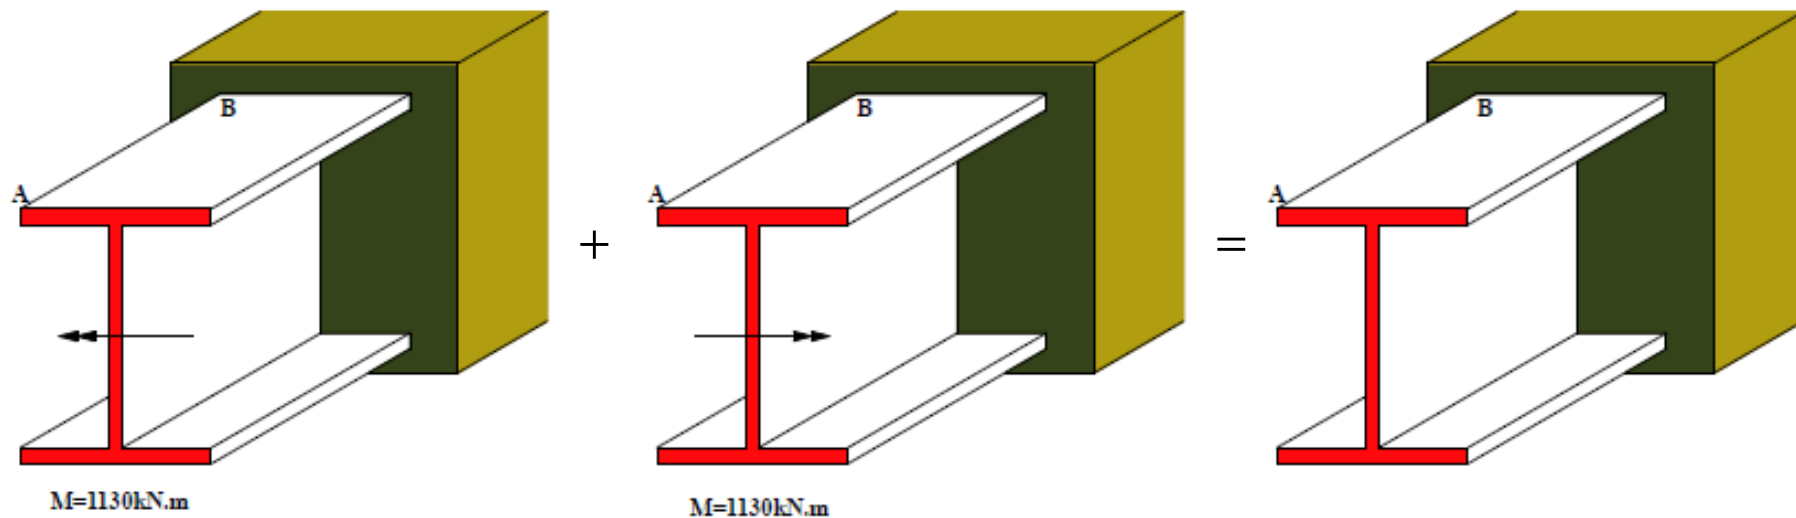

Introduction to Plasticity

Example 09

c. Residual stress

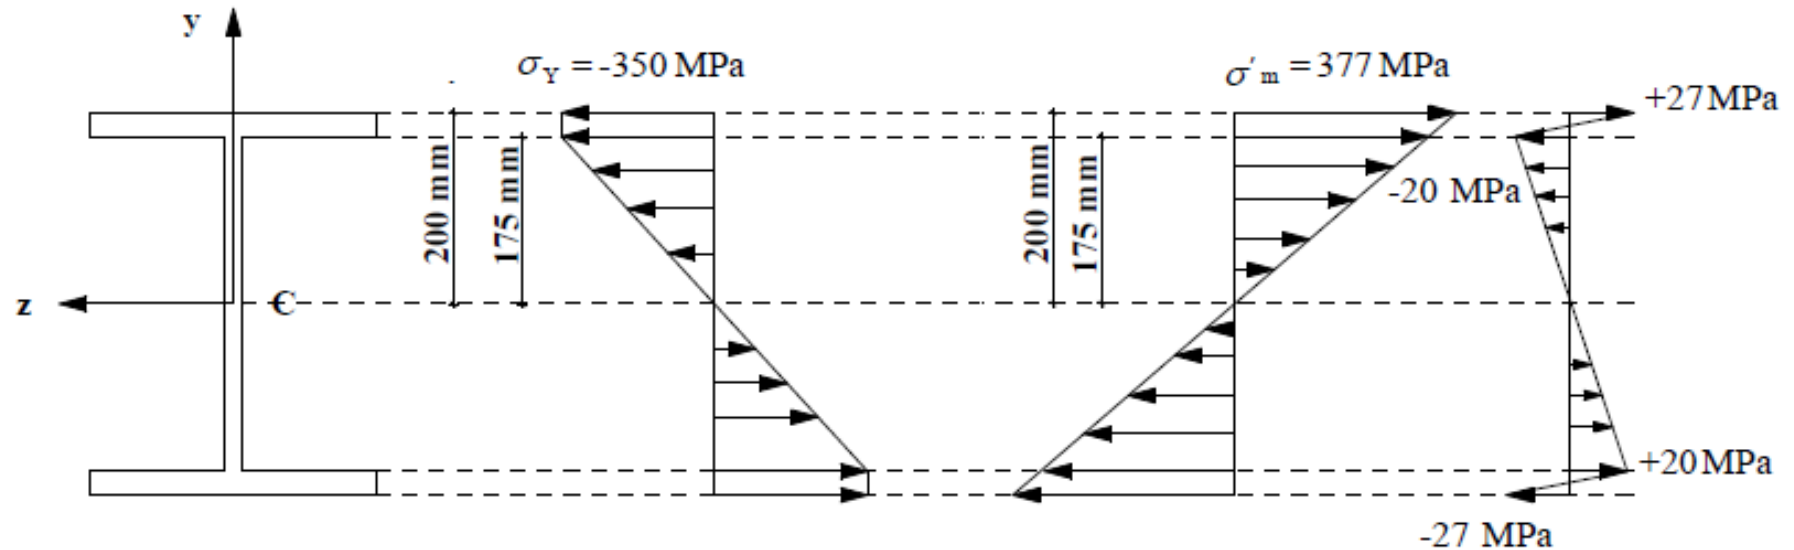


Permanent Radius of Curvature. At $y = 175$ mm the residual stress is $\sigma_y = -20$ MPa. Since no plastic deformation occurred at this point, Hooke's law can be used

Introduction to Plasticity

Example 10


Determine the plastic moment M_p of a beam with the cross section shown when the beam is bent about a horizontal axis. Assume that the material is Elastoplastic with a yield strength of 240 MPa.

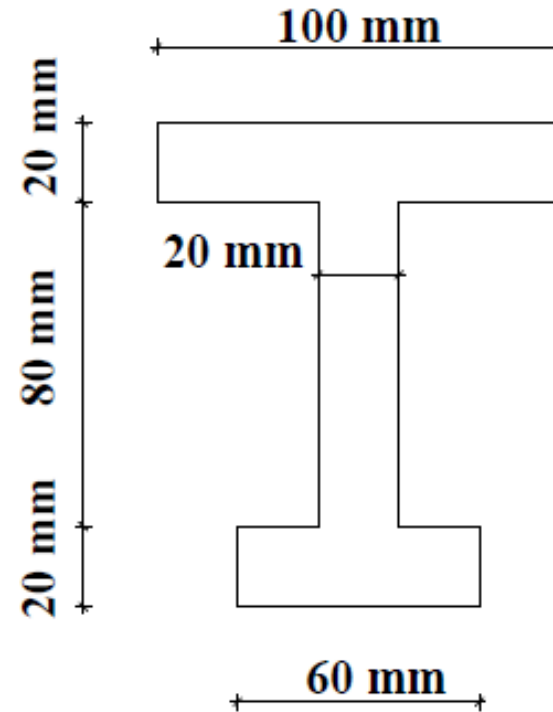

Introduction to Plasticity

Example 10


Neutral Axis. When the deformation is fully plastic, the neutral axis divides the cross section into two portions of equal areas. Since the total area is

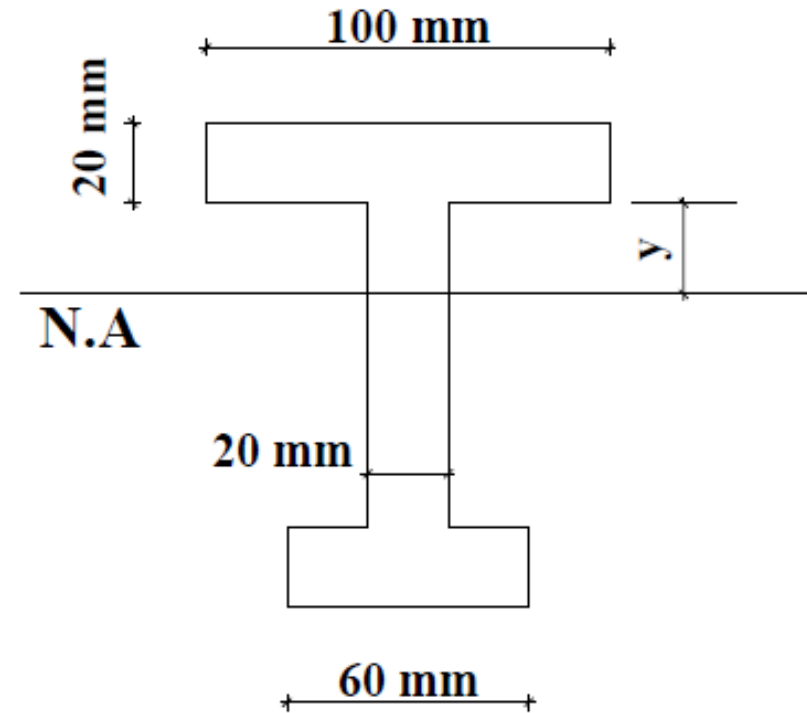

Introduction to Plasticity

Example 10


Plastic Moment

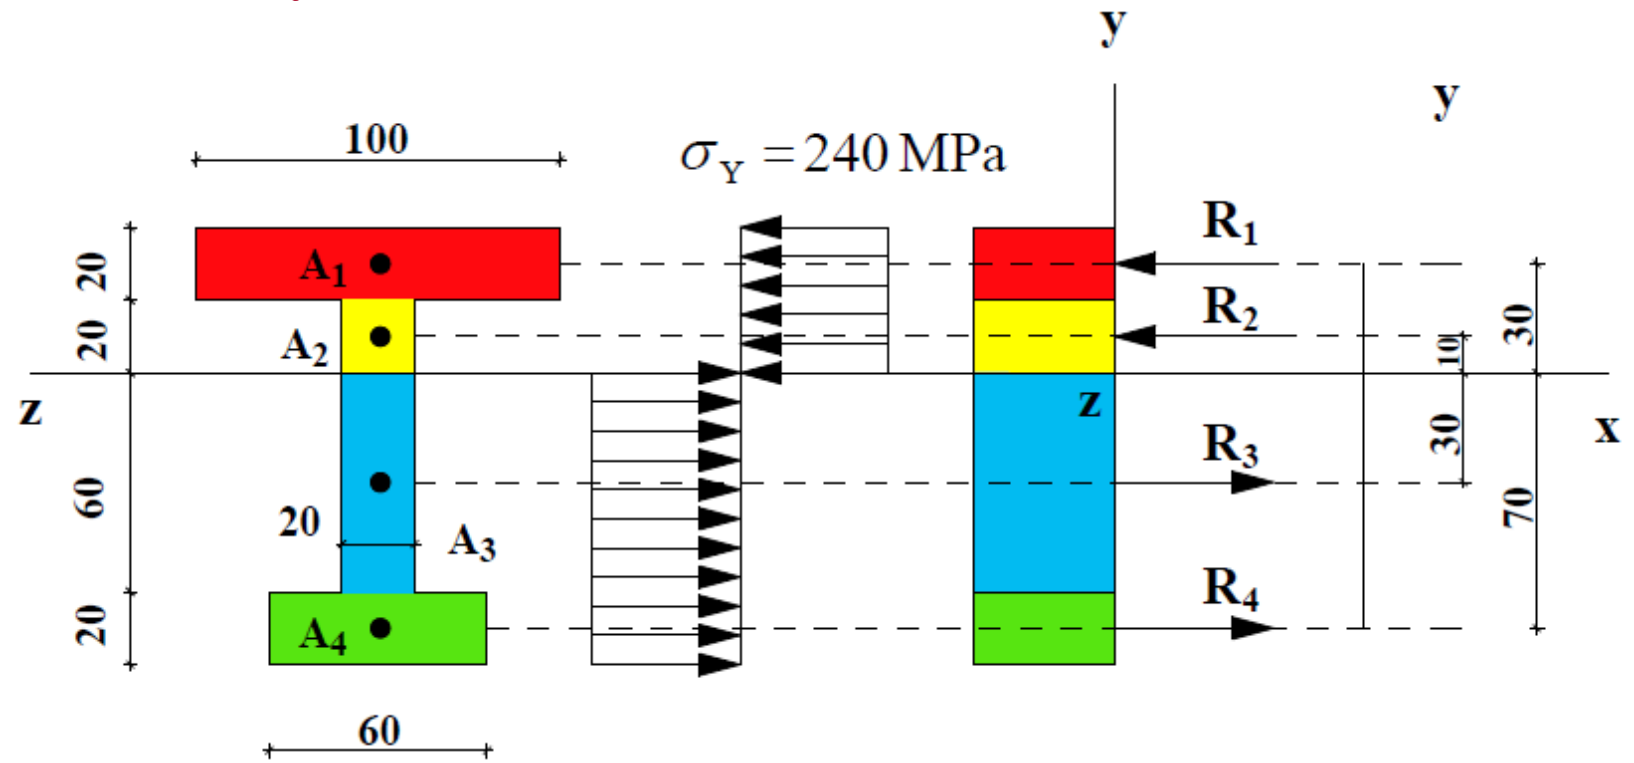

Introduction to Plasticity

Example 11


Determine the yield moment M_y , the plastic moment M_p , and the plastic modulus Z for the simply supported beam having the cross section shown in Figure. Also calculate the shape factor and plastic load P_n acting transversely through the midspan of the beam. Assume that $\sigma_Y = 50$ ksi.

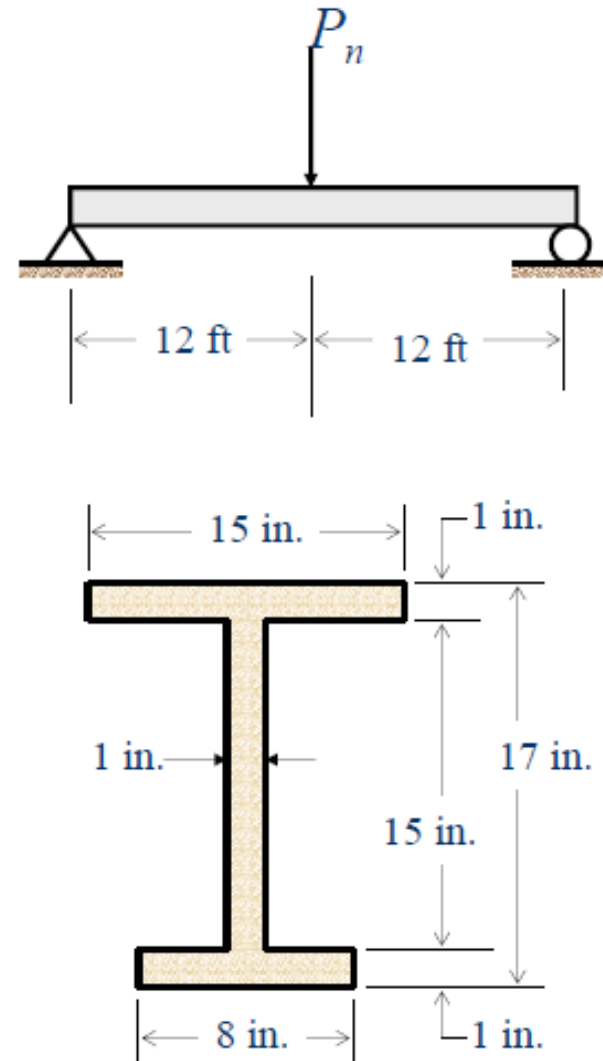

Introduction to Plasticity

Example 11


Elastic Calculations:

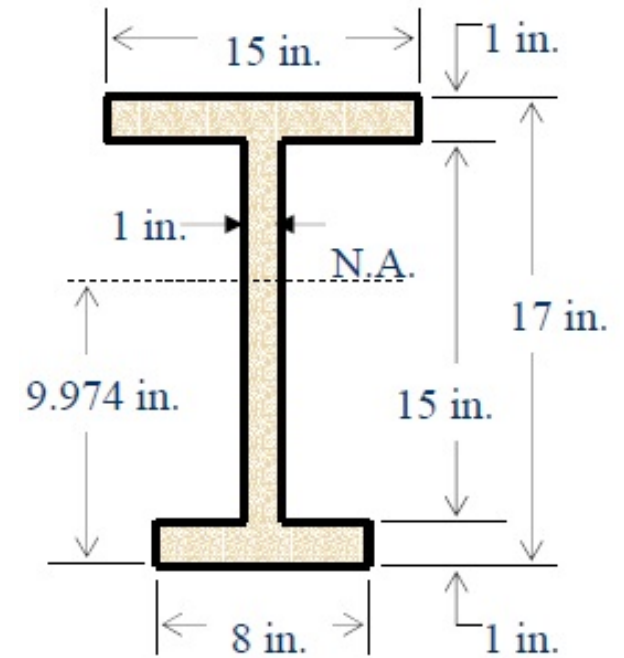

Introduction to Plasticity

Example 11


Plastic Calculations:

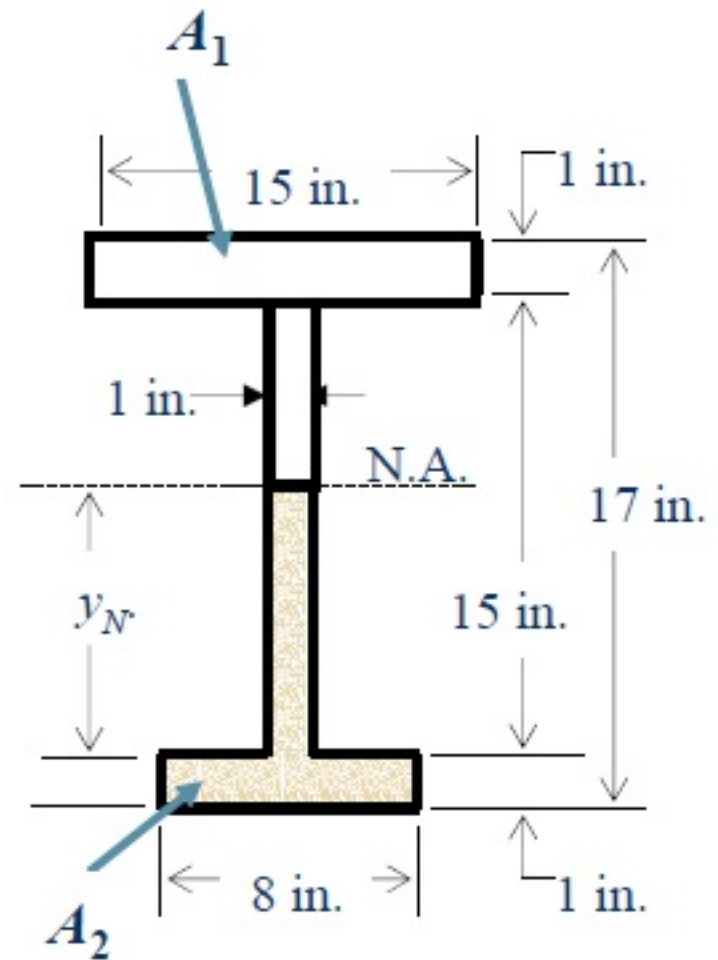

Introduction to Plasticity

Example 11


Plastic Calculations:

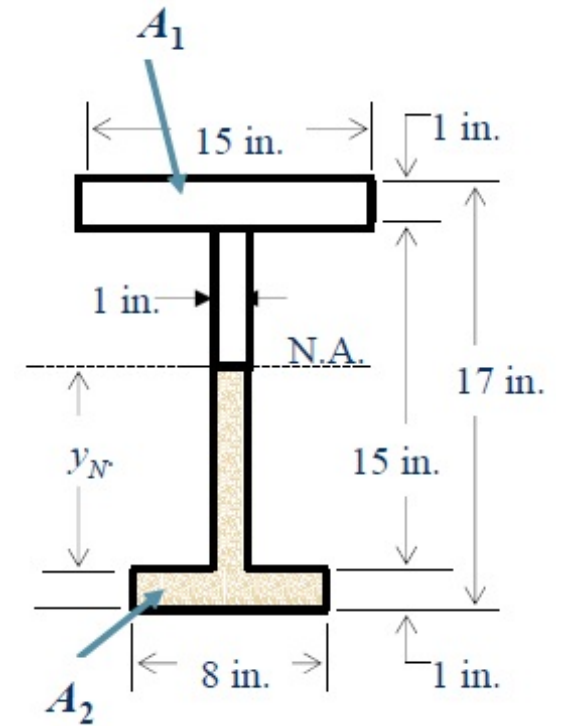

Introduction to Plasticity


Example 11

Plastic Calculations:

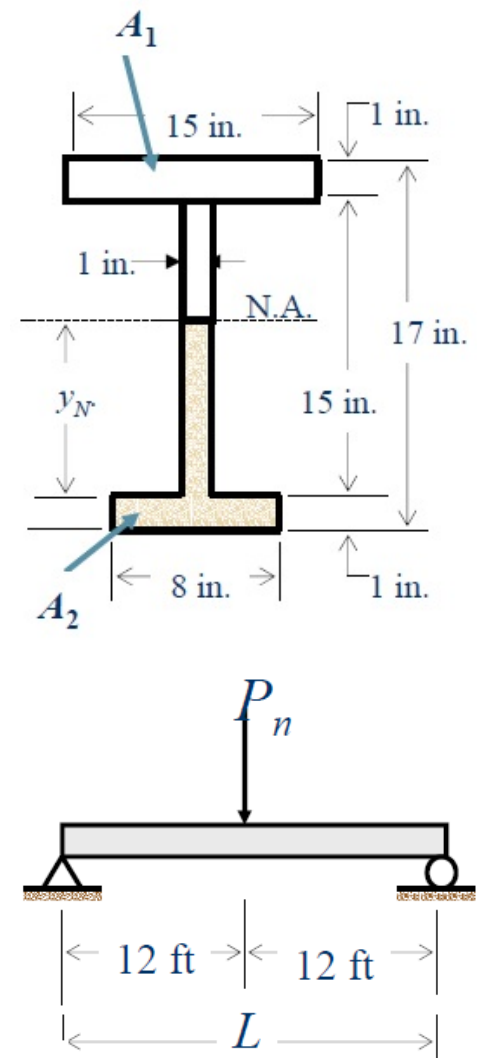

Introduction to Plasticity


□ Plastic Deformations due to shearing

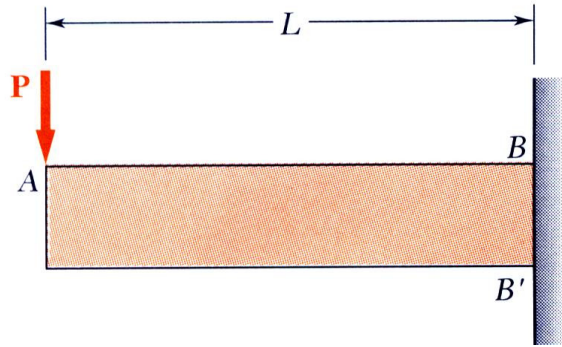

- Recall: $M_Y = \frac{I}{c} \sigma_Y = \text{maximum elastic moment}$
- For $M = PL < M_Y$, the normal stress does not exceed the yield stress anywhere along the beam.


- For $PL > M_Y$, yield is initiated at B and B' . For an Elastoplastic material, the half-thickness of the elastic core is found from

$$Px = \frac{3}{2} M_Y \left(1 - \frac{1}{3} \frac{y_Y^2}{c^2} \right) \Rightarrow y_Y = c \sqrt{3 \left(1 - \frac{2Px}{3M_Y} \right)}$$

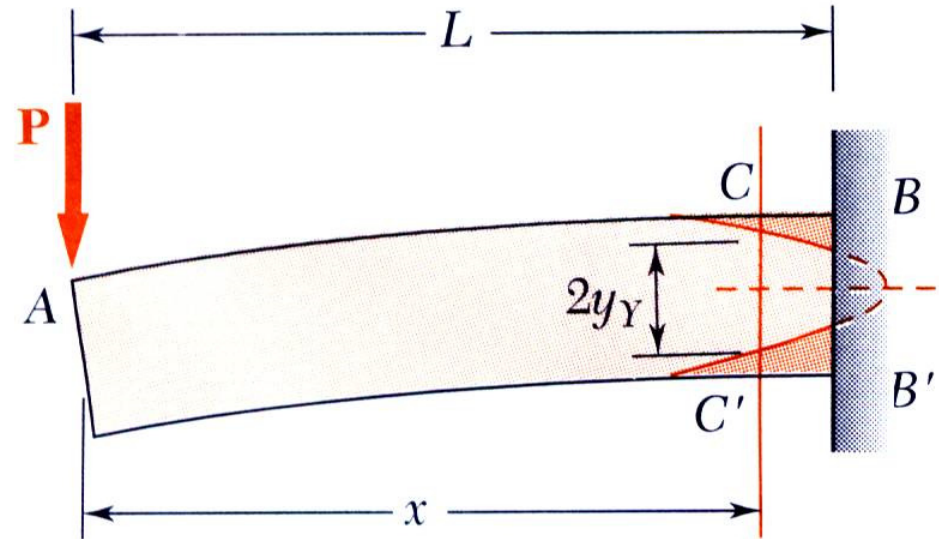

Introduction to Plasticity


□ Plastic Deformations due to shearing

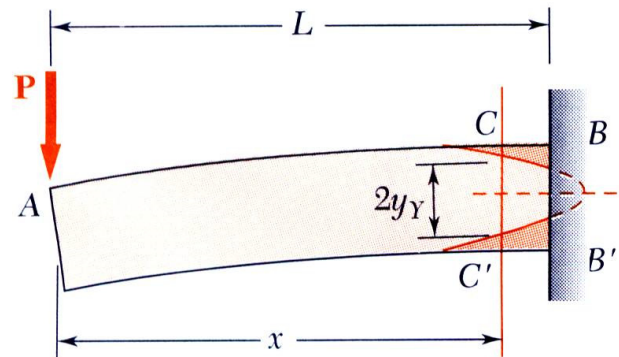

- The section becomes fully plastic at the wall when

at $x = L \Rightarrow M = PL$

If $PL = \frac{3}{2} M_Y = M_p \Rightarrow y_Y = c \sqrt{3 \left(1 - \frac{2}{3} \times \frac{3}{2} \frac{M_Y}{M_Y} \right)} = 0$

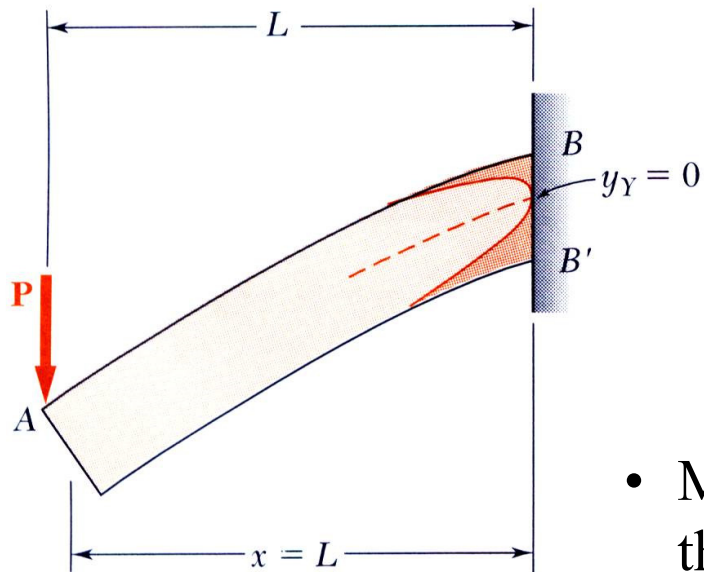

$\rho = \frac{y_Y}{\epsilon_Y} = \frac{0}{\epsilon_Y} \Rightarrow \rho = 0 \Rightarrow \frac{1}{\rho} = \infty \Rightarrow M \rightarrow \infty$

indicating the presence of a **sharp bend** in the beam at its fixed end, We say that a **plastic hinge** has developed at that point.

- Maximum load which the beam can support is

$$P_{\max} = \frac{M_p}{L}$$




Introduction to Plasticity

□ Plastic Deformations due to shearing

- Preceding discussion was based on normal stresses only
- Consider horizontal shear force on an element within the plastic zone,

$$\Delta H = -(\sigma_C - \sigma_D)dA = -(\sigma_Y - \sigma_Y)dA = 0$$

Therefore, *the shear stress is zero in the plastic zone.*

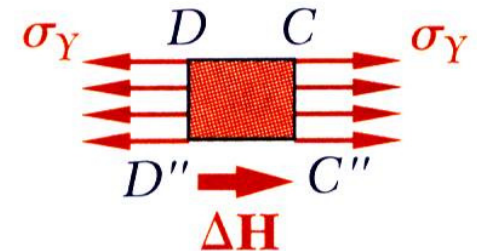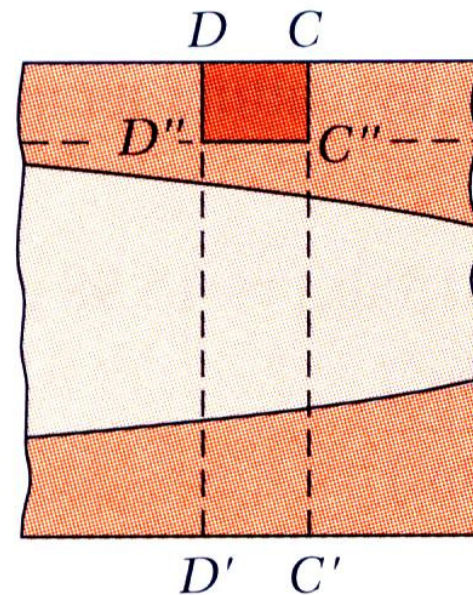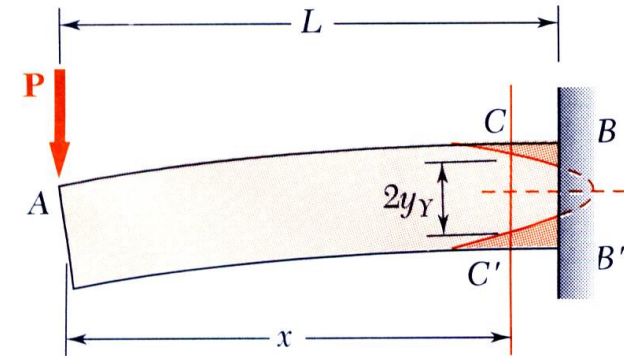

(b)

Introduction to Plasticity

□ Plastic Deformations due to shearing

- *Shear load is carried by the elastic core,*


It can be shown that the distribution of the shearing stresses over EE' is the same as in an elastic rectangular beam of the same width b as beam AB , and of depth equal to the thickness $2y_Y$ of the elastic zone. Denoting by A' the area $2by_Y$ of the elastic portion of the cross section. we have

$$\tau_{xy} = \frac{3P}{2A'} \left(1 - \frac{y^2}{y_Y^2} \right)$$

where $A' = 2by_Y$

\Rightarrow


$$\tau_{\max} = \frac{3P}{2A'}$$

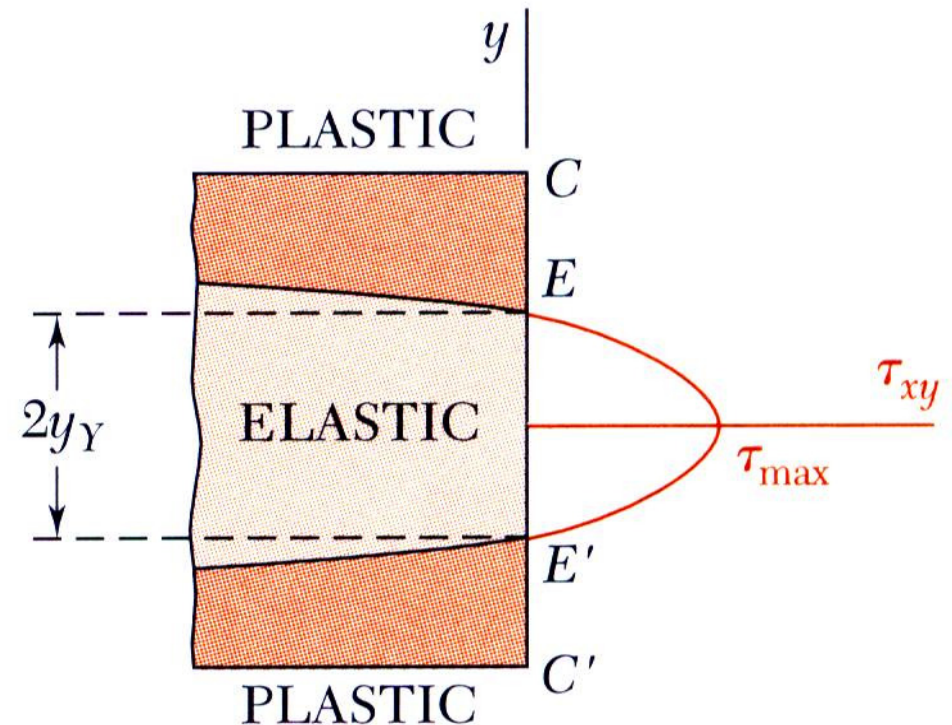

Introduction to Plasticity

Example 12


Determine shear stress distribution at fixed point . Assume that $\sigma_Y = 240 \text{ Mpa}$.

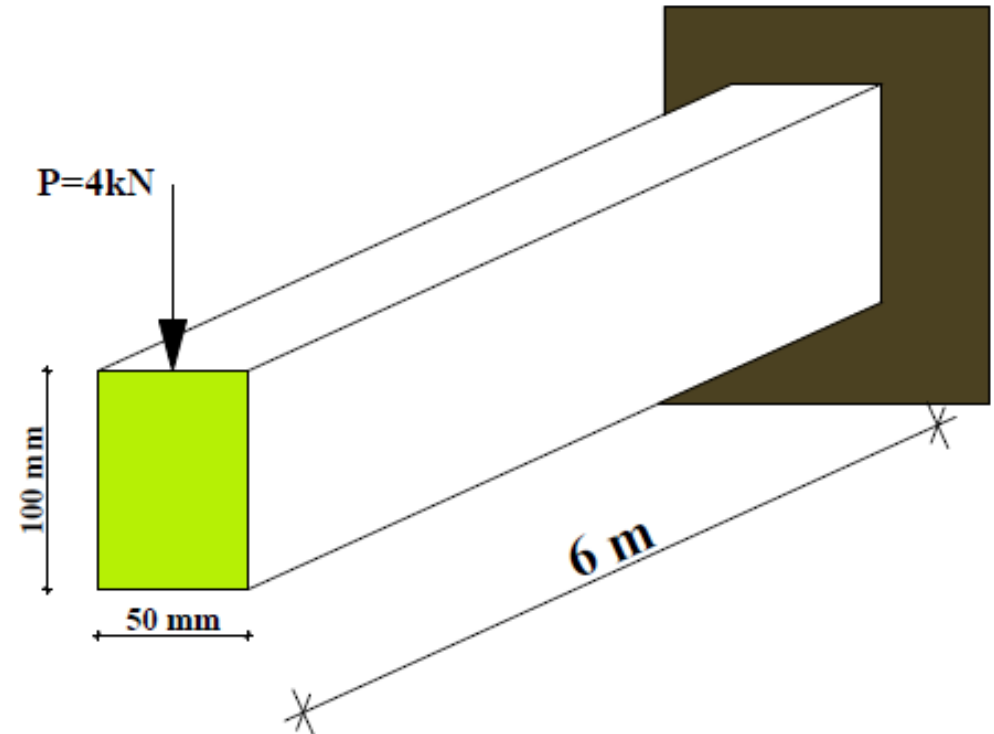

Introduction to Plasticity

Example 12

- Maximum elastic moment:

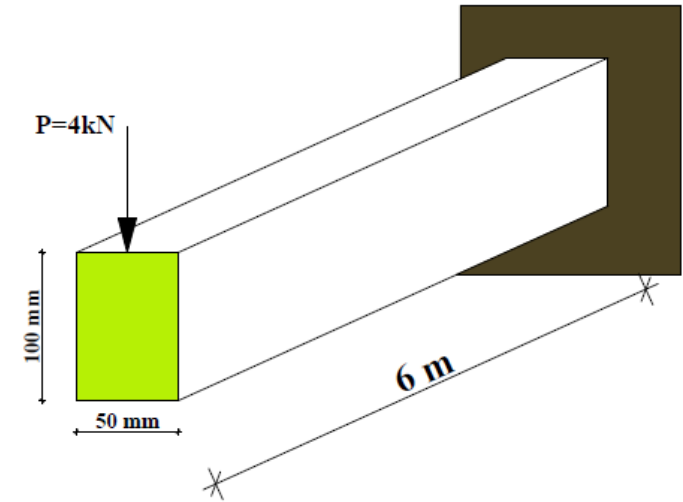

Introduction to Plasticity

Example 12

